**OIL INDIA LIMITED**
(A GOVT. OF INDIA ENTERPRISE)
P.O.DULIAJAN-786602, ASSAM
**E-TENDER NOTICE**

# WORKS CONTRACT

**OIL INDIA LIMITED (OIL)** invites Bids under Limited Composite bid System from **OIL Registered A-Class** firms/ contractors only through its E-Procurement portal **"https://etender.srm.oilindia.in/irj/portal"** for the following works.

| IFB No. | SHORT DESCRIPTION OF SERVICE | OIL Registered Class | COST OF BID DOCUMENT |
|---|---|---|---|
| **CDC7030L25** | Construction of boundary wall, approach road and operator room cum IM room by earth filling the low laying area for placement of In-house Gas compressor inside Dikom GCS. | **A** | **NIL** |

**Bid Closing / Opening Date & Time for the above work : 13.08.2024 at 11.00/14.00 Hrs.**

Bidder shall require User ID and Password for online submission of Bid.

Bidders without having E-tender Login ID and Password should complete their online registration at least seven (7) days prior to the scheduled bid closing date and time of the tender. For online registration, Bidder may visit the OIL's E-tender site https://etender.srm.oilindia.in/irj/portal.

Necessary Login ID & Password will be issued by OIL only after submitting the complete online registration by the Bidder. In the event of late registration/incomplete registration by Bidder, OIL INDIA LIMITED shall not be responsible for late allotment of User ID & Password and request for bid closing date extension on that plea shall not be entertained by Company.

**No physical Bid documents will be issued.** The details of IFB can be viewed using "Guest Login" provided in the E-Procurement portal and also in OIL's web site **www.oil-india.com**. The link to OIL's E-Procurement portal has also been provided through OIL's web site www.oil-india.com.

All corrigenda, addenda, amendments, time extension, clarifications etc. to the tender will be hosted on the OIL's website and in the e-tender portal only and no separate notification shall be issued in the press. Prospective bidders are requested to regularly visit the website and e-portal to keep them updated.

This tender document is issued to **OIL Registered A-Class contractors** who have submitted revised "One Time Security Deposit" in line with OIL's notification no.: CONT/CIV/988/2016 dated 01.07.2016, on or before 13:30 Hrs. of Bid Closing/Opening date of the tender.

Sr. Officer-Contracts (C)
**For GM-Contracts (O & C)**
**For CGM-Contracts (HOD)**
**For RESIDENT CHIEF EXECUTIVE**

**Date: 26.07.2024**

OIL INDIA LIMITED
(A Govt. of India Enterprise)
Contracts Department, Duliajan

# WORKS CONTRACT

OIL INDIA LIMITED, a premier Public Sector Enterprise of Govt. of India engaged in drilling and exploration activities for hydrocarbon invites ON-LINE BIDS from **OIL's Registered 'A' Class Civil Contractors only (who have submitted revised "One Time Security Deposit" in line with OIL's notification no.: CONT/CIV/988/2016 dated 01.07.2016, on or before 13:30 Hrs. of Bid Closing/Opening date of this tender)** for the following mentioned work under **LIMITED COMPOSITE BID SYSTEM** through its e-Procurement site:

---

DESCRIPTION OF WORK/ SERVICE: **Construction of boundary wall, approach road and operator room cum IM room by earth filling the low laying area for placement of In-house Gas compressor inside Dikom GCS.**

TENDER VALUE: **₹ 1,23,85,390.08**

LOCATION OF WORK: **Dikom GCS, Dibrugarh**

PERIOD OF WORK COMPLETION: **20 Weeks**

BID CLOSING/ OPENING DATE & TIME: **13.08.2024 (11:00 HRS/14:00 HRS)**

TENDER FEE: **Nil**

BID SECURITY DEPOSIT: **Nil**

PERFORMANCE SECURITY DEPOSIT: **10 % of Total Contract Cost** (Out of which 2.5% to be submitted as Performance security Deposit and 7.5% shall be kept as retention money from running bill).

**Extension of Bid Closing Date:** The Company expects the bidders to adhere to the Bid submission end date timeline. Bidders are requested to refrain from seeking extension of "Bid Closing date" and such request for Bid Closing Date extension shall not be entertained by the Company. However, OIL at its discretion may extend the Bid Closing Date due to unforeseen circumstances.

**Deadline for Pre-Bid Query:** Any clarification/Queries relevant to the tender, if any, must be submitted by bidders within **01.08.2024**. Company will not be liable to respond to any such clarifications/queries for delay beyond **01.08.2024**.

**2.0** This tender document is issued to **OIL Registered 'A' Class Civil Contractors** only in line with Notification for Amendment of Tendering Rules vide Ref. No. OIL/CONT/V/C/753/2019-20 dated 11.09.2019. OIL Registered Civil Contractors other than **'A'** Class are not eligible to participate in this tender.

OIL Registered **'A'** class bidders (if any) having MSE Registration Certificate are requested to upload a scanned copy of their registration certificate along with the technical bid while participating in the tender. This is for Company's information and record only.

**3.0 SUBMISSION OF PERFORMANCE SECURITY:** Successful bidder has to submit Performance Security amount as mentioned in Covering Letter, **within 30 (Thirty) days** from the date of issue of Letter of Intent/Award (LOI/LOA).

3.1 a. The Performance Security should be submitted in the form of irrevocable Bank Guarantee (as per **Annexure-IV**) issued by Nationalized or Scheduled Bank in favour of M/s Oil India Limited and payable at DULIAJAN. The Bank Guarantee must be on Non-Judicial Stamp Paper of requisite value as per Indian

Stamp Act purchased in the name of Banker. A duly filled undertaking towards details of the BG (as per **Annexure-V**) must also be submitted along with the original BG.

b. Alternately, the Performance Security can also be paid through Bank Draft / Cashier's Cheque / Banker's Cheque / Fixed Deposit Receipt (Account OIL INDIA LIMITED) / irrevocable Letter of Credit / NEFT / RTGS / Electronic Fund Transfer (subject to credit in OIL's account within prescribed time) to designated account of OIL.

i. If the Performance Security is submitted in the form of Bank Draft, Banker's Cheque, Cashier's Cheque, Fixed Deposit Receipt or Letter of Credit, the same should be in favour of "Oil India Limited" payable at Duliajan.

ii. Performance Security amount through NEFT or RTGS mode may be deposited in the following designated OIL's bank account:

| **Bank Details of Beneficiary: OIL INDIA LIMITED** | | |
|---|---|---|
| **a** | Bank Name | STATE BANK OF INDIA |
| **b** | Branch Name | Duliajan |
| **c** | Branch Address | Duliajan, Dist.-Dibrugarh |
| **d** | Bank Account No. | **10494832599** |
| **e** | Type of Account | Current Account |
| **f** | IFSC Code | **SBIN0002053** |
| **g** | MICR Code | 786002302 |
| **h** | SWIFT Code | SBININBB479 |

iii. If the Performance security is submitted through NEFT or RTGS mode, the bidder shall submit details such as **UTR No., Contract No., Bidder's name & Deposited Amount etc.**

c. **Submission of performance security in the form of Electronic Bank Guarantee (e-BG):**

Bidders/Contractors are advised to submit the e-BG from any of the following banks presently providing facility to issue an e-BG:

| **Sl. No.** | **Bank Name** | **Sl. No.** | **Bank Name** |
|---|---|---|---|
| 1 | AU Small Finance Bank | 12 | IDFC First Bank |
| 2 | Axis Bank | 13 | Indian Bank |
| 3 | Bank of Baroda | 14 | Indian Overseas Bank |
| 4 | Bank of India | 15 | IndusInd Bank |
| 5 | Canara Bank | 16 | Karur Vysya Bank |
| 6 | City Union Bank | 17 | Kotak Mahindra Bank |
| 7 | Federal Bank | 18 | Punjab National Bank |
| 8 | HDFC Bank | 19 | RBL Bank |
| 9 | HSBC Bank | 20 | State Bank of India |

| | | | |
|---|---|---|---|
| 10 | ICICI Bank | 21 | South Indian Bank |
| 11 | IDBI Bank | 22 | Yes Bank |

| **BENEFICIARY DETAILS FOR ISSUE OF ELECTRONIC BANK GUARANTEE (e-BG)** | | |
|---|---|---|
| **A** | Name | OIL INDIA LIMITED |
| **B** | PAN | AAAC02352C |
| **C** | Date of Incorporation | 18-02-1959 |
| **D** | Email ID | Abhay_Kumar@oilindia.in |
| **E** | Mobile No | 9480312436 |
| **F** | Local Address | Duliajan, Dibrugarh, Assam- 786602 |
| **G** | Registered Address | Duliajan, Dibrugarh, Assam- 786602 |

d. In case of Bidders submitting Performance Security in the form of Bank Guarantee / Bank Draft / Cashier's Cheque / Banker's Cheque / Fixed Deposit Receipt / Letter of Credit, the original hard copy of Performance Security shall be submitted within the time frame as stipulated in the LOA/LOI.

e. In case of Bidders submitting Performance Security in the form of Fixed/Term Deposit, bidders have to submit a declaration as per the format prescribed in **Annexure-VIII**. Further, the bidder may arrange the confirmation mail regarding issue of fixed deposit with the following details directly from bank's official e-mail id to Oil India's following e-mail id FD_PS@OILINDIA.IN

| FD No. | Issue Date | Maturity Date | FD Amount | Beneficiary/ Contractor Name | Whether above FD is pledged in favour of 'Oil India Limited' (Yes/No) | FD amount pledged (in ₹) as per bank's books of accounts | Mode of FD Renewal (Auto Renewal/Auto closure) | Remarks (if any) of the issuing Bank |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | |

f. No other mode of payment other than the mode covered under Point Nos. a. & b. will be accepted by the Company.

3.2 Performance Security shall not accrue any interest during its period of validity or extended validity.

3.3 The Bank Guarantee issuing bank branch must ensure the following:
The Bank Guarantee issued by the bank must be routed through SFMS platform as per the following details:

(i) MT 760/MT 760 COV for issuance of bank guarantee.

(ii) MT 760/MT 767 COV for amendment of bank guarantee.

[Contract No. should reflect in the SFMS text under MT 760/MT 760 COV]

The above message/intimation shall be sent through SFMS by the BG issuing Bank branch to ICICI Bank Ltd., Duliajan Branch, IFS Code – ICIC0000213; SWIFT Code - ICICINBBXXX. Branch Address:

ICICI Bank Ltd, Kunja Bhavan, Daily Bazaar, Duliajan, Dibrugarh, Assam – 786602. The Bank details are as under:

| **Bank Details of Beneficiary** | | |
|---|---|---|
| **A** | Bank Name | ICICI Bank Ltd. |
| **B** | Branch Name | DULIAJAN |
| **C** | Branch Address | Kunja Bhavan, Daily Bazaar, Duliajan, Dibrugarh, Assam – 786602 |
| **D** | IFSC Code | ICIC0000213 |
| **E** | Unique identifier code (Field 7037) | OIL503988890 |
| **F** | Company Name | Oil India Limited |
| **H** | SWIFT Code | ICICINBBXXX |

3.4 This Performance Security must be valid for **03 (three) months** after the date of expiry of the defect liability period. In the event of the contract being extended within the provisions of the contract agreement, the contractor will have to extend suitably the validity of the "Security Deposit" for the extended period.

3.5 The Performance Security Deposit will be refunded to the Contractor after defect liability period under the contract (including extension, if any), but a part or whole of which shall be used by the Company in realization of liquidated damages or claims, if any or for adjustment of compensation or loss due to the Company for any reason.

**4.0** If the above mentioned closing / opening day of the tender happens to be non-working day due to Bandh / Strike or any other reason, the bids will be received and opened on the following working day at the same time except on Saturdays.

**5.0** While submitting responses against the tender in e-tender portal, bidders must fill up the **"Total Bid Value"** (under RFx Information > Basic Data > Total Bid Value), taking account of all liabilities including statutory liabilities in their quoted price excluding PF and GST. A screen shot in this regard is shown below. The price quoted under the "Total Bid Value" should be within the range of "At Par" to "+10%" of Company's Internal Estimate. Bids with overall quoted price as indicated in the "Total Bid Value" (under RFx Information > Basic Data > Total Bid Value) below "at par" and above "10%" of Company's Internal Estimate will be rejected straightway.

Company shall evaluate the inter-se-ranking of the bidders and conduct Draw of Lots amongst the eligible bidders in case of identical bidding, strictly as per the overall quoted price under the "Total Bid Value" (under RFx Information > Basic Data > Total Bid Value) and awarding of contract shall be done accordingly.

It is the responsibility of the bidder to fill up the "Total Bid Value" (under RFx Information > Basic Data > Total Bid Value) correctly as per the instructions given herein. OIL INDIA LTD accepts no liability of any nature resulting from any calculation error or omissions while filling up the "Total Bid Value" (under RFx Information > Basic Data > Total Bid Value) by the bidders and no claim whatsoever shall be entertained thereof.

In case of identical bidding, Draw of Lots shall be conducted amongst the bidders who have quoted the lowest price (within the permissible percentage) under the "Total Bid Value" tab, to select 3 (three) numbers of bidders priority-wise. Scrutiny of bids will be carried out for these 3(three) bidders only for further processing of the tender.

For convenience of the bidders and to improve transparency, the overall rate quoted by the bidders (within the range of "At par" to +10% of the internal estimate) against the tender shall be available for online viewing by all such bidders whose price bids shall be opened. Online view of prices as above shall be available to the bidders only upto 7 (seven) days from the date of price bid opening of the tender.

**6.0** All techno-commercial documents are to be submitted as per tender requirement under '**Technical Attachments Tab**" in E-TENDER PORTAL.

**7.0** To participate in OIL's E-procurement tender, bidders must have a legally Valid Digital Signature of Class 3 **[Organizational Type]** with Organizations Name along with **Encryption Certificate** as per Indian IT Act from the licensed Certifying Authorities operating under the Root Certifying Authority of India (RCAI), Controller of Certifying Authorities (CCA) of India (http://www.cca.gov.in). Digital Signature Certificates having "**Organization Name**" field other than **Bidder's Name (i.e. Firm's Name)** are not acceptable.

7.1 The authenticity of above Digital Signature shall be verified through authorized CA after bid opening. If the **Digital Signature Certificate (DSC)** used for signing is not of "**Class -3**" & Organizational type with Organization's name in the name of bidder (i.e. Firm's Name), the bid will be rejected.

7.2 Only in case of sole proprietorship firms, Digital Signature Certificates issued in the name of the proprietor is also acceptable provided the bid is submitted in the capacity of a proprietorship firm.

7.3 Bidder is responsible for ensuring the validity of Digital Signature Certificate (DSC) and its proper usage by their employee.

7.4 The bid including all uploaded documents shall be **digitally signed** by duly authorized representative of the bidding company. The DSC used must be of the type as mentioned above.

**8.0** Bidders without having E-tender Login ID and Password should complete their online registration at least seven (7) days prior to the scheduled bid closing date and time of the tender. For online registration, Bidder may visit the OIL's E-tender site https://etender.srm.oilindia.in/irj/portal.

8.1 Necessary Login ID & Password will be issued by OIL only after submitting the complete online registration by the Bidder. In the event of late registration/incomplete registration by Bidder, OIL INDIA LIMITED shall not be responsible for late allotment of User ID & Password and request for bid closing date extension on that plea shall not be entertained by Company.

**9.0** The Company reserves the right to reject any or all the bids or accept any bid without assigning any reason.

9.1 Bidders must note that in case of any discrepancy or non-compliance to the tender criteria is found in their bids at any stage of tendering prior to the award of contract, such bids shall be rejected straightway. No claims or requests from such bidders shall be entertained thereafter.

**10.0** (a) Bidders will be permitted by System to withdraw their bid or make any changes in their bid after the bid has been uploaded by the bidder prior to the Bid Closing date and time as mentioned in the bid. But no changes or withdrawal would be allowed by the system once the due date and time for submission of bids has been reached and bids are opened. Bidders are requested to take note of the above and arrange to submit their bids within the submission deadline to avoid last minute rush/network problems.

(b) No Bidder can withdraw his bid within the validity or extended validity of the bid. Withdrawal of any bid within bid validity period will lead to forfeiture of his/her/their Bid Security/Performance Security in full and debarment from participation in future tenders, at the sole discretion of the Company and the period of debarment will be decided as per OIL's banning policy available at OIL's website.

(c) Once a withdrawal letter is received from any bidder, the offer will be treated as withdrawn and no further claim / correspondence will be entertained in this regard.

**11.0** The Bid must be valid for 90 (Ninety) days from the actual date of closing of the tender.

**12.0** Conditional bids are liable to be rejected at the discretion of the Company.
**13.0** The work may be split up amongst more than one contractor at the sole discretion of the Company.

**14.0** Wherever applicable, the bidder shall have itself registered under Employees' Provident Fund and Miscellaneous Provisions Act, 1952 and follow the relevant statutory provisions including Rules made there-under concerning contractual workers to be engaged by such bidder. If the bidder does not have P.F. Code number at the time of applying for this tender, then the bidder must apply for the same if the contract is awarded to the bidder. Such bidder shall furnish the Provident Fund code number issued by the appropriate Govt. Authority, within 45 days of signing of contract, to Company (or when advised by Company, after 45 days of signing the contract); and all PF related statutory guidelines shall be adhered to by the bidder.

**15.0** Before Bidding :

- Bidder(s) are advised to inspect the work site with permission from HOD-Civil or his representative, to assess the nature and extent of work and the conditions under which it will be carried out. The bidder may also seek such clarification from this office as are deemed necessary.

- Bidder(s) should clearly understand all the terms & conditions, criteria, specification etc. of this tender.

**16.0** The selected bidder will be required to enter into a formal contract within two weeks from the date of issuance of LOI, which will be based on their bid, i.e. OIL's Standard Form of Contract.

**17.0** OIL INDIA LIMITED reserves the right to curtail / enhance the scope of the work stated above or cancel, if required.

**18.0** The amount of retention money shall be released after 6 (six) months from the date of completion certified by the concerned department.

**19.0** Bidders have to submit a declaration as per the format prescribed in **Annexure-VI** & **VII** regarding Financial Standing and not under Holiday List/ Delisted/ Blacklisted/Debarred in OIL respectively along with the technical bid.

**20.0** The work shall have to be started within seven days from the date of work order.

**21.0** Time Schedule: The time allowed for completing the work will be reckoned from the date of issue of work order. Time is the essence of the Contract and failure on part of the contractor to complete the work within the stipulated time, shall entitle the Company to impose liquidated damages and / or penalty from the contractor as per terms of the Contract.

**22.0** The contractor will be required to allow OIL officials to inspect the work site and documents in respect of the workers payment.

**23.0 BACKING OUT BY BIDDER**: In case any bidder withdraws their bid within the bid validity period, the Bid Security/Performance Security will be forfeited and be debarred from further tendering as per OIL's banning policy available at OIL's website.

**24.0 BACKING OUT BY L-1 BIDDER AFTER ISSUE OF LOA/LOI**: In case LOA/LOI issued is not accepted by the L1 bidder or the Performance Security is not submitted as per the terms of the contract or the contract is not signed within the time specified in the Bid Document, the Bid Security/Performance Security shall be forfeited and the bidder shall be dealt as per OIL's banning policy available at OIL's website.

**25.0 FURNISHING FRAUDULENT INFORMATION/DOCUMENT**: If it is found that a Bidder/Contractor has furnished fraudulent document/information, the Bid Security/ Performance Security shall be forfeited and the party shall be debarred as per the OIL's Banning Policy available at OIL's website.

**26.0 ERRING / DEFAULTING AGENCIES:** Erring and defaulting agencies like bidder, contractor, supplier, vendor, service provider will be dealt as per OIL's Banning Policy available in OIL's website: www.oil-india.com.

**27.0** Any agency which is put under banning/ suspension/ holiday list as per OIL's Banning Policy are debarred from participating in this tender during the currency of the banning/ suspension/ holiday period. Bids of such agencies if received shall be rejected straightway.

**28.0 Bidder(s) must also furnish the followings:**

a) NAME OF FIRM :
b) DETAIL POSTAL ADDRESS :
c) MOBILE / TELEPHONE NO :
d) E-MAIL ADDRESS :
e) FAX NO (If available) :
f) CONTACT PERSON :
g) VENDOR CODE :
h) GST Registration Number (If available):

**29.0 The tender will be governed by** :

a) Covering Letter
b) Part – I - General Conditions of Contract (GCC)
c) Part - II - Schedule of Work, Unit and Quantity (SOQ)
d) Part - III - Special Conditions of Contract (SCC)
e) Part - IV - Schedule of Company's Plants, Materials and Equipment (SCPME)
f) Part- V- Safety Measures (SM)
g) Part- VI - Integrity Pact (IP)
h) Bid Rejection Criteria & Bid Evaluation Criteria (BRC/BEC)
i) Annexures

Bidders are requested to examine all instructions, forms, terms and specifications in the bid. Failure to furnish all information required as per the bid or submission of offers not substantially responsive to the bid in every respect will be at the bidders risk and may result in the rejection of its offer without seeking any clarifications.

**30.0** The bidders shall submit both the "TECHNICAL" and "PRICED" bids through electronic form in the OIL's E-Procurement portal within the Bid Closing Date and Time stipulated in the E-Tender. The Technical Bid should be submitted as per Scope of Work & Technical Specifications along with all technical documents related to the tender and should be uploaded under **"Technical Attachment" Tab only**. **Bidders must note that no price details should be uploaded in "Technical Attachment" Tab Page. Bidders must quote their overall price under the "Total Bid Value" within the range of "at par" to "+10%" of Company's Internal Estimate, taking into account all liabilities including statutory liabilities in their quoted price (excluding PF and GST). Bidder must also upload the Undertaking as prescribed in Proforma-I under the "Notes and Attachment" Tab in e-tender portal. A screen shot in this regard is shown below. Offer not complying with above submission procedure will be rejected as per Bid Rejection Criteria. In Bid opening, both Technical & Priced Bids will be opened.**

Please go through the "**GENERAL GUIDELINES TO BIDDERS**" **and "VENDOR USER MANUAL (Effective 15.09.19)**" provided in OIL's e-Portal, in detail before uploading the document.

**NB:** In order to bid for OIL e-tenders all the vendors are required to obtain a legally valid Digital Certificate Class III [Organization] along with Encryption Certificate as per Indian IT Act from the licensed Certifying Authorities (CA) operating under the Root Certifying Authority of India (RCAI), Controller of Certifying Authorities (CCA) of India. Digital Signature Certificate comes in a pair of Signing/verification and Encryption/decryption certificate. Bidder should have both the Signing/verification and Encryption/Decryption certificate for Signing and encryption, decryption purpose respectively. The driver needs to be installed once, without which the DSC will not be recognized. While participating on e-Tendering the DSC token should be connected to your system.

Encryption certificate is mandatorily required for submission of bid. In case bidder created response with one certificate (using encryption key) and bidder change his Digital Signature Certificate then old certificate (used for encryption) is required in order to decrypt his encrypted response for getting the edit mode of the response. Once decryption is done, bidder may use new DSC certificate for uploading and submission of their offer. It is the sole responsibility of the bidder to keep their DSC certificate properly. In case of loss of the certificate, OIL INDIA LTD is not responsible.

**31.0 The Integrity Pact is applicable against this tender:** OIL shall be entering into an Integrity Pact with the bidders as per format enclosed vide "Part-VI Integrity Pact" of the tender document. This Integrity Pact proforma has been duly signed digitally by OIL's competent signatory. The proforma has to be returned by the bidder (along with the technical bid) duly signed (digitally) by the same signatory who sign the bid, i.e., who is duly authorized to sign the bid. Any bid not accompanied by Integrity Pact Proforma duly signed (digitally) by the bidder shall be rejected straightway. Uploading the Integrity Pact with digital signature will be construed that all pages of the Integrity Pact has been signed by the bidder's authorized signatory who sign the Bid.

30.1 In case of a joint venture, all the partners of the joint venture should sign the Integrity Pact.

30.2 In the event of any dispute between the management and the contractor relating to those contracts where Integrity Pact is applicable, in case, both the parties are agreeable, they may try to settle dispute through mediation before the panel of IEMs in a time bound manner. If required, the organizations may adopt any mediation rules for this purpose. In case, the dispute remains unresolved even after mediation by the panel of IEMs, the organization may take further action as per the terms and conditions of the contract.


**Note:** Bidders may contact the Independent External Monitors for any matter relating to the IP at the following addresses:

Shri Ram Phal Pawar, IPS (Retd.), Former Director, NCRB, MHA, e-Mail ID: rpawar61@hotmail.com & ramphal.pawar@ips.gov.in , Shri Ajit Mohan Sharan, IAS (Retd.), Former Secretary, Ministry of Ayush, Govt. of India, e-mail: ams057@gmail.com and Dr. Tejendra Mohan Bhasin, Former Vigilance Commissioner, CVC, e-mail ID: tmbhasin@gmail.com have been appointed as Independent External Monitors.

**32.0 SCREEN SHOT :**

Bidders must fill up the **"Total Bid Value" (under RFx Information > Basic Data > Total Bid Value),** taking account of all liabilities including statutory liabilities in their quoted price (excluding PF and GST).

**A.** Filling of **"Total Bid Value"** with overall quoted price where Detailed Price Information is "No Price": Under "RFx Information"> "Basic Data"> "Total Bid Value"

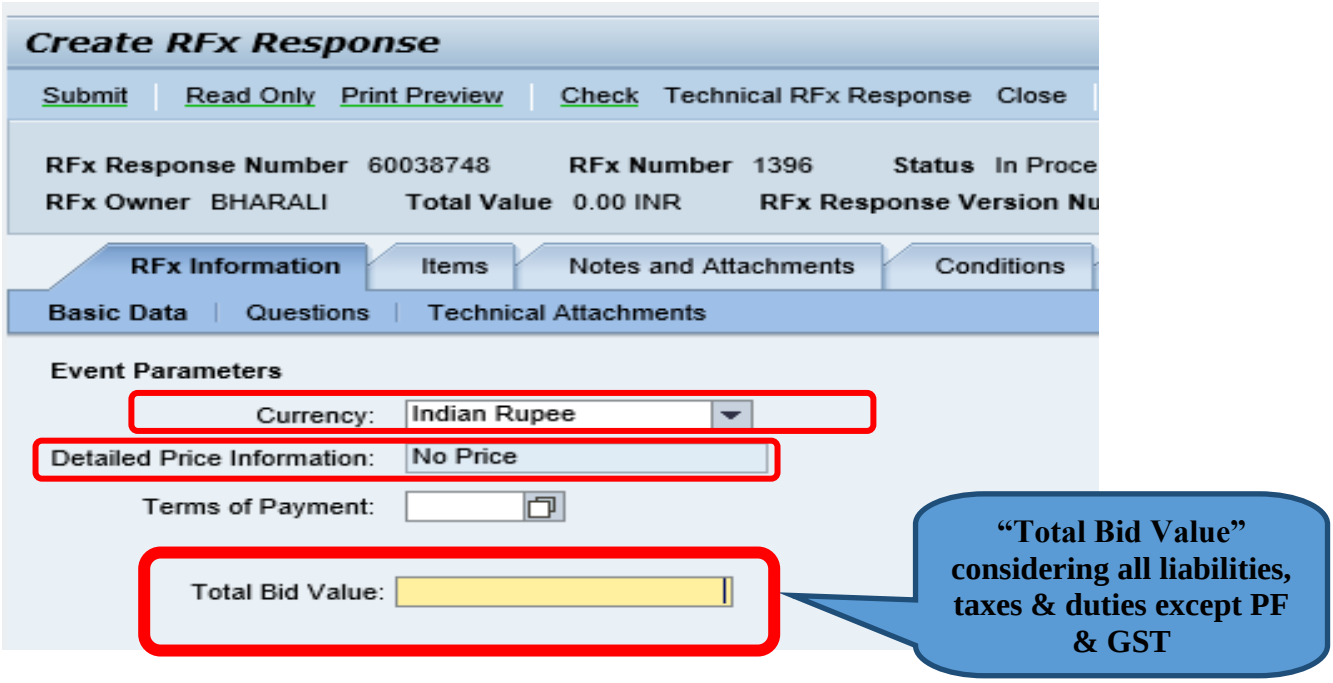



**Note: Total Bid Value" is mandatory in "No Price" RFx only**

On **"EDIT"** Mode, bidders are advised to upload **"Technical Bid"** and **"Priced Bid"** in the respective places as indicated below:


**Note:**
* The "Technical Bid" shall contain all techno-commercial details **except the prices**.

** The "Priced bid" must contain the price schedule as available in the tender. For uploading Priced Bid, first click on Add Attachment, a browser window will open, select the file from the PC and name the file under Description, Assigned to General Data and click on OK to digitally sign and upload the File. Please click on Save Button of the Response to Save the uploaded files.


**B.** Uploading of **TECHNICAL BID:** Technical files to be added under RFX Information >"Technical Attachments"

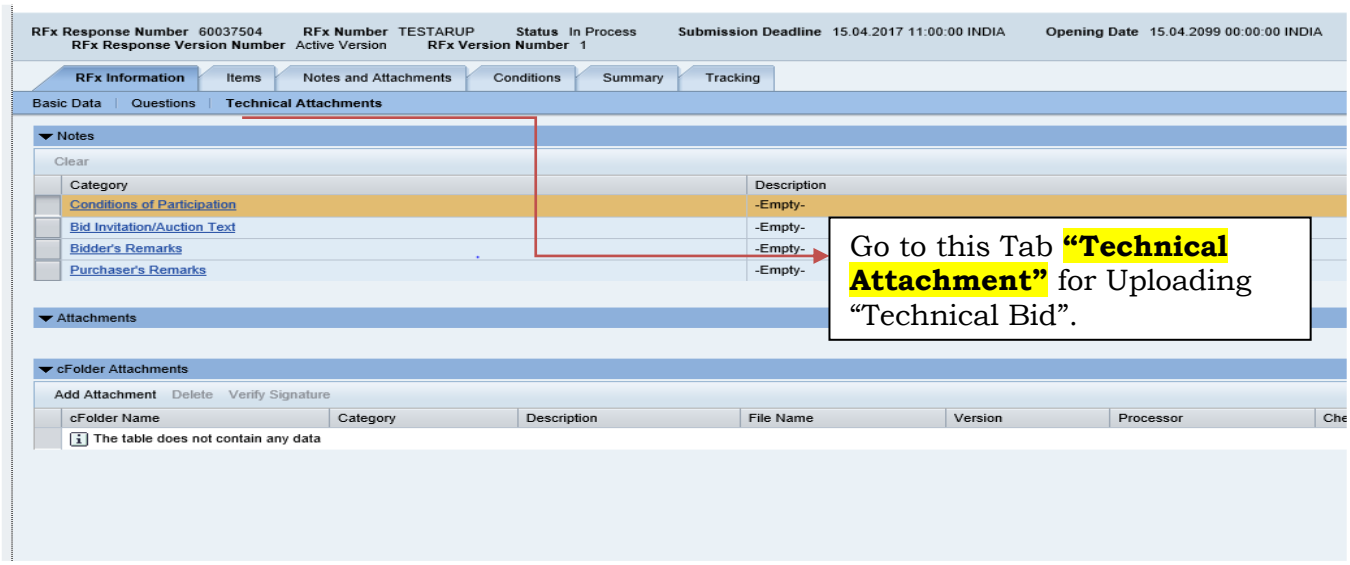


**C.** Uploading of **UNDERTAKING IN RESPECT OF QUOTED PRICE:**

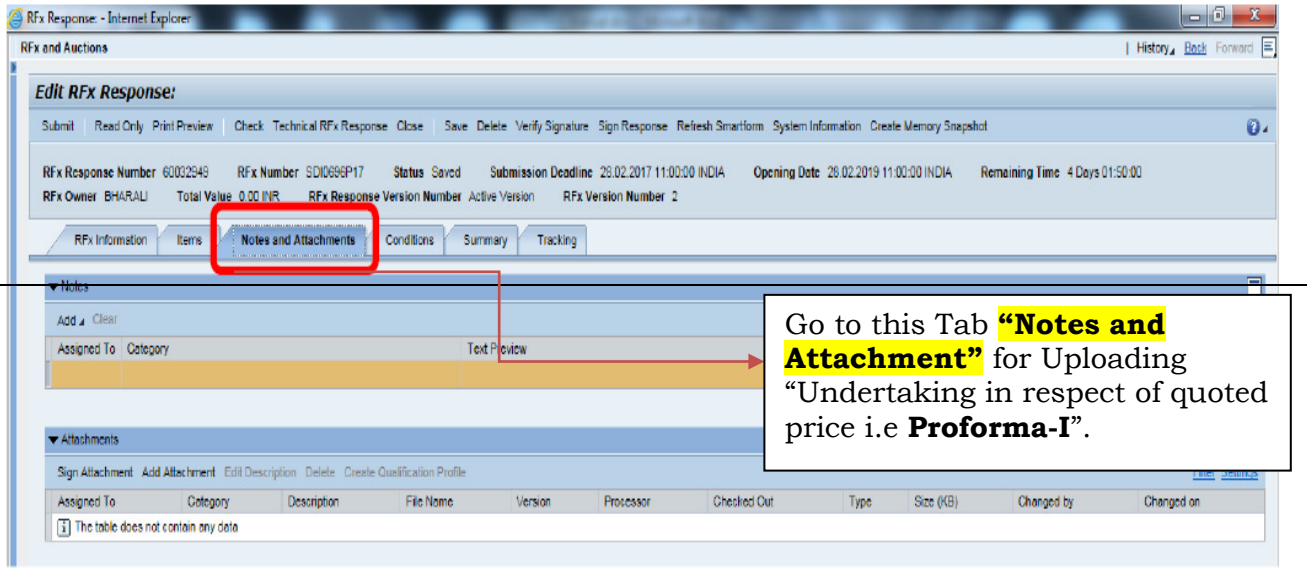



**D.** After Uploading of **Proforma-I** Click '**Save**'

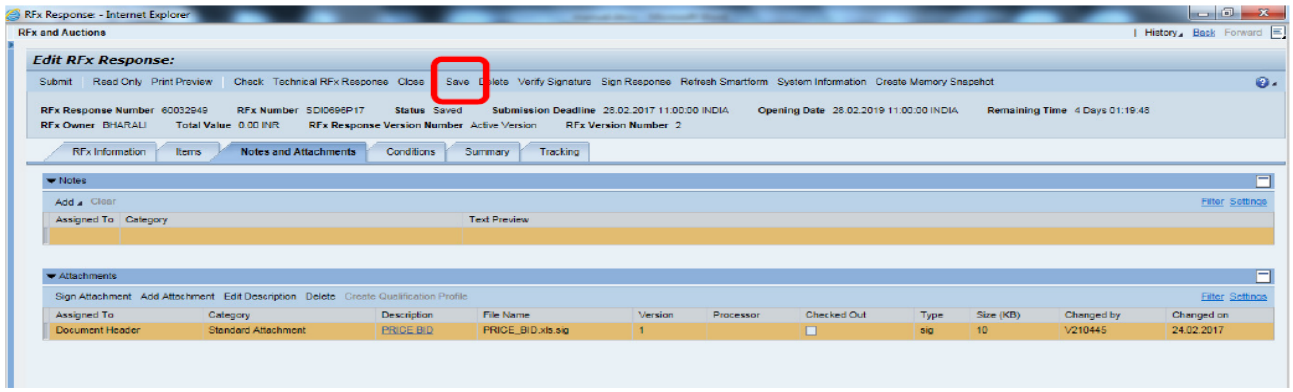


**Once Saved ,the Data will be Encrypted & the Encryption Certificate will be in use.**

**E.** Click to select the desired Encryption certificate & Encrypt Bid:

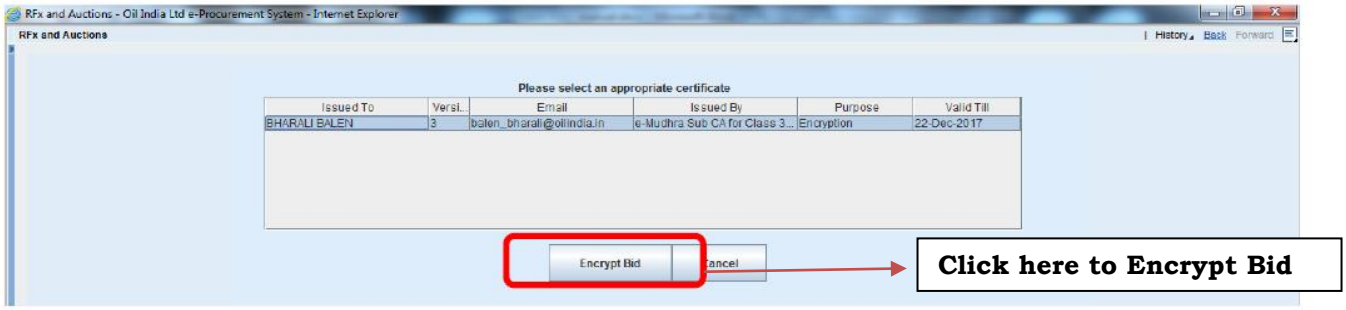



**The Encrypted Data will be displayed only when click 'Decrypt data'**


**F.** The Encrypted Data will be displayed only when click '**Decrypt data**'

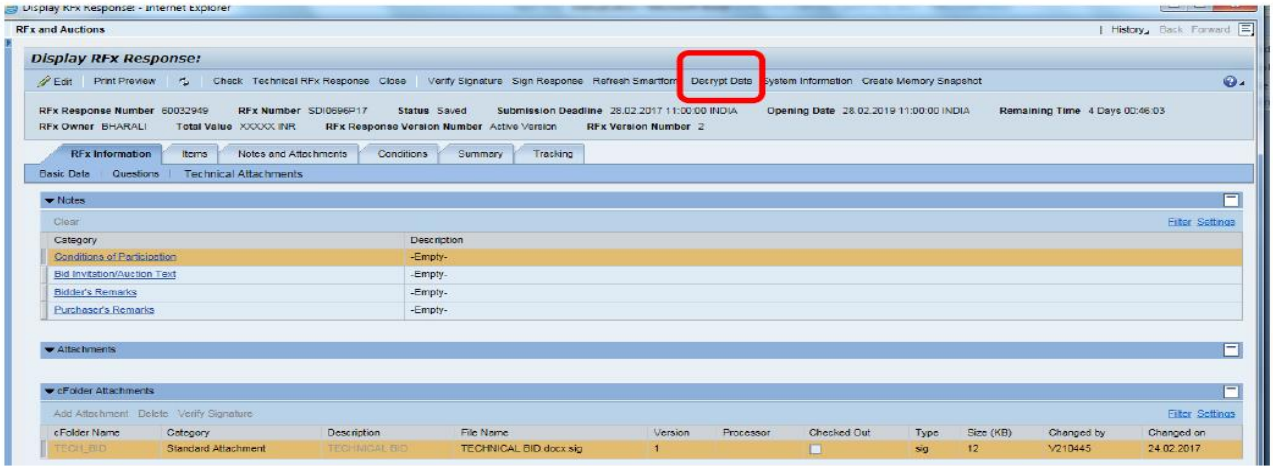


**G.** Click on '**Close**'

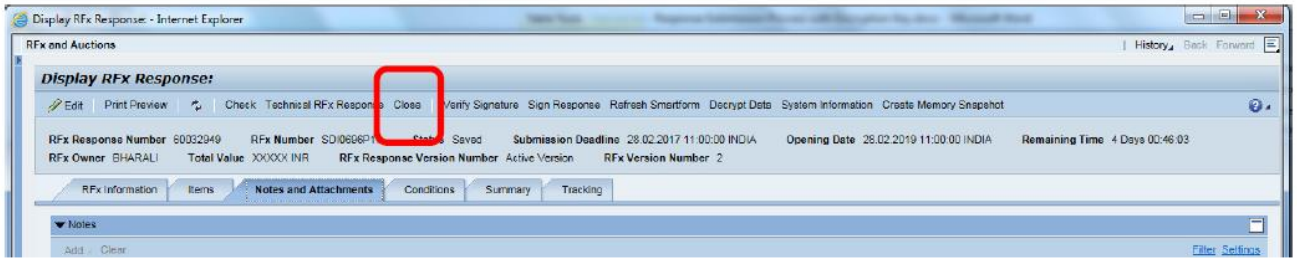


**H.** Click on '**Refresh**'. Then Click on '**Response No.**'

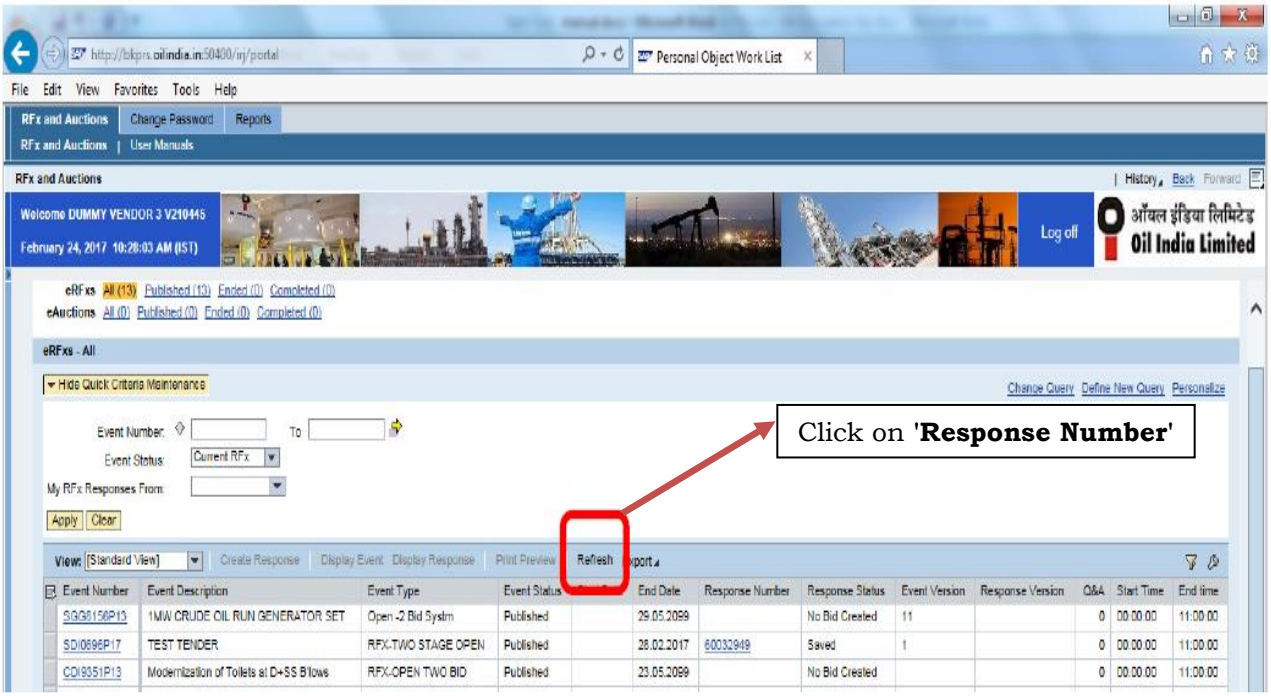



Now Uploading part is complete. Bidders are requested to go to the Initial screen. It is always better to come to the first screen and refresh the page and then going in into the response for the submission process.


**I.** On 'Edit' mode Click to select the same Encryption certificate used for De-cryption else data will not Decrypt.

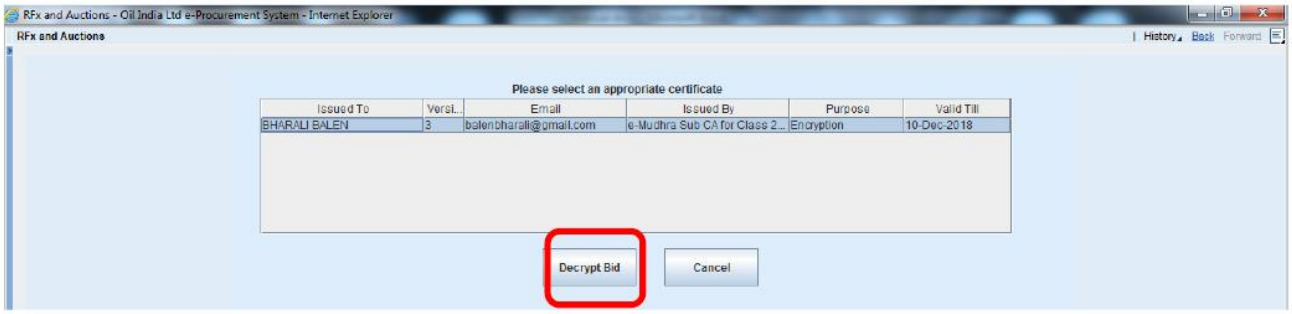


**J.** After Entering User pin , Click '**Check**'. Bidder may submit the response in case there is no error.

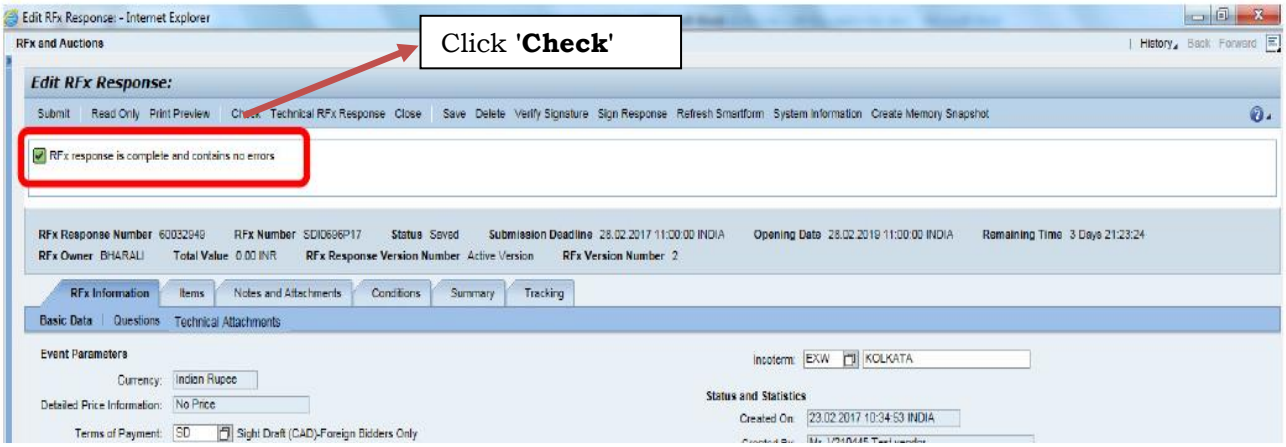


**K.** Click on '**Submit**' button

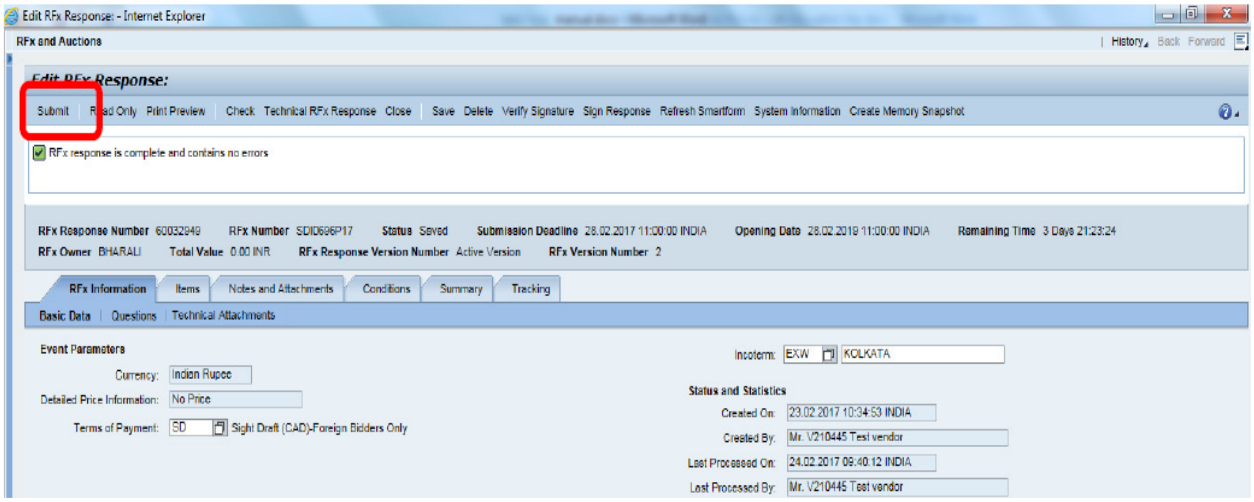



**Before submit, Please do check all the documents uploaded and on-line data maintained are correct.**


**L.** After Clicking '**Submit**' below pop up will open. Select Digital Signature & **Sign**.

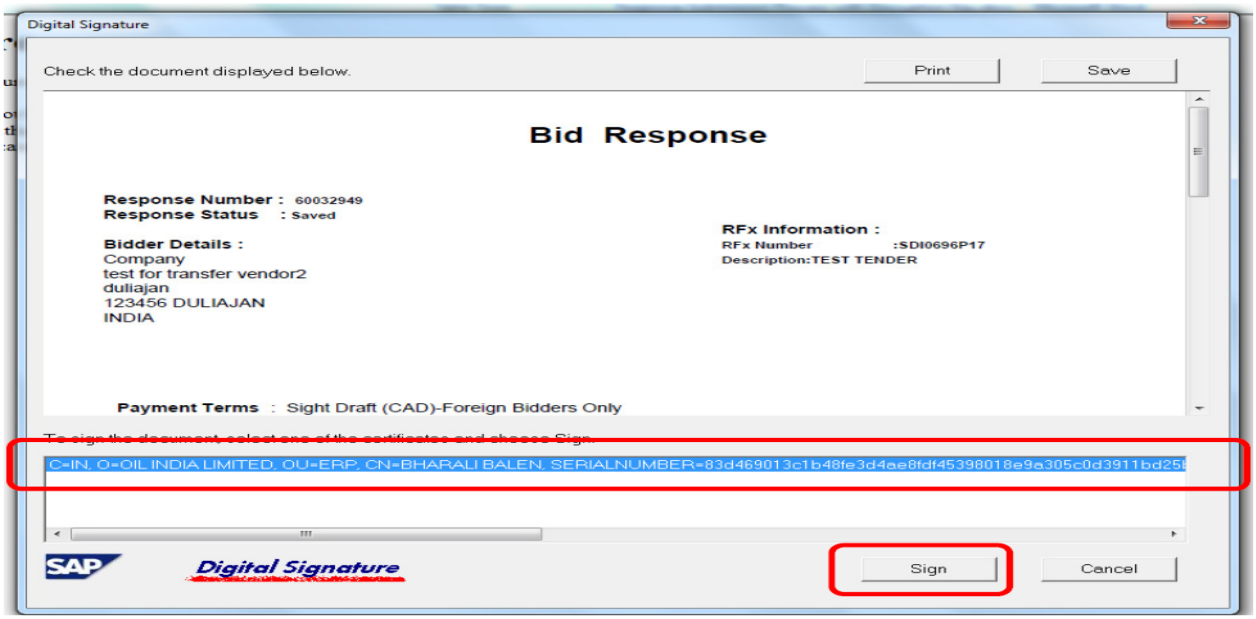



**M.** After Signing the response has to be encrypted again. Select the encryption certificate and **Encrypt Bid**.

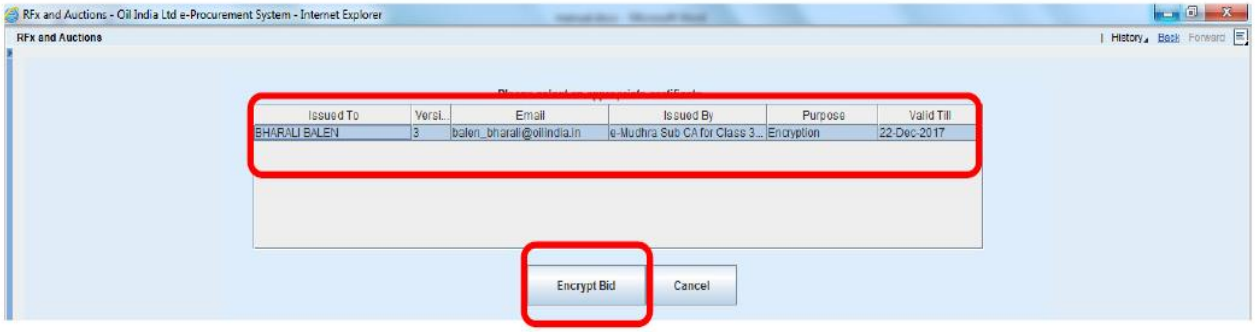

**N.** Click '**Close**'

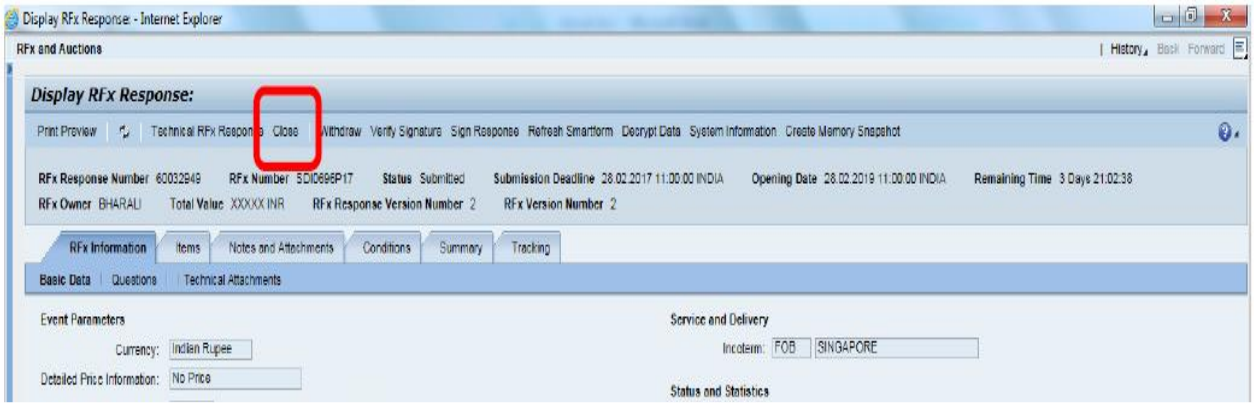


**O.** Click on '**Refresh**'. The status of Response must be '**Submitted**'

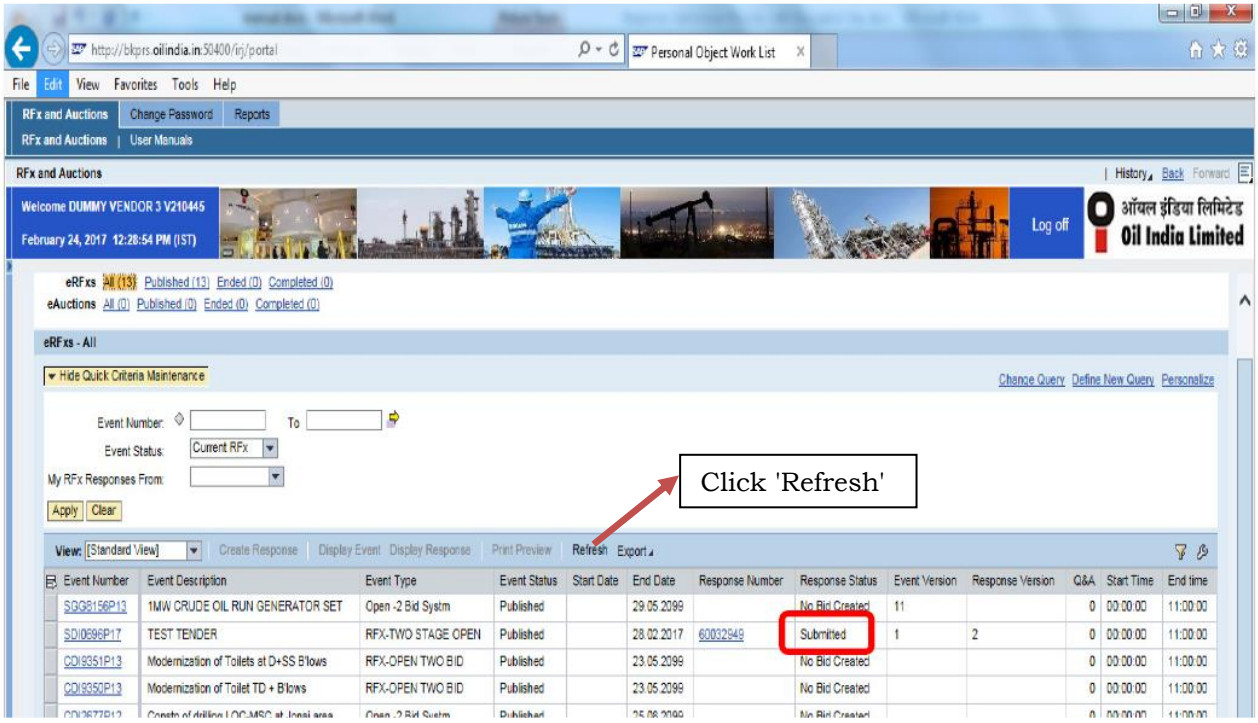


This is the end of **Response submission with Encryption key** process.

**33.0** OIL now looks forward for your active participation in the tender.

**GM-CONTRACTS (O & C)**
**For CGM-CONTRACTS (HOD)**
**For RESIDENT CHIEF EXECUTIVE**

**BID EVALUATION CRITERIA (BEC)/BID REJECTION CRITERIA (BRC)**

**(A). BID EVALUATION CRITERIA (BEC):**

**1.0** The bid shall conform generally to the specifications and terms and conditions given in the Tender Documents. Bids will be rejected in case services offered do not conform to the required parameters stipulated in the technical specifications. Not-withstanding the general conformity of the bid to the stipulated specifications, the following mandatory requirements will have to be particularly met by the Bidders without which the same will be considered as non-responsive and rejected. All the documents related to **BEC** must be submitted along with the Techno-Commercial Bid.

**2.0** **OIL Registered 'A' Class Civil Contractors** who have submitted revised "One Time Security Deposit" in line with OIL's notification no.: CONT/CIV/988/2016 dated 01.07.2016, on or before 13:30 Hrs. of Bid Closing/Opening date of this tender are only eligible to participate in this tender.

**3.0** Bids must be valid for minimum **90 (Ninety) days** from the actual date of Bid closing. If bidder does not submit / declare bid validity period, it will be presumed that the bid validity is **90 (Ninety)** days.

**4.0** OIL shall be entering into an Integrity Pact with the bidders as per format enclosed vide Part-VI of the tender document. This Integrity Pact proforma has been duly signed digitally by OIL's competent signatory. The proforma has to be uploaded by the bidder (along with the Un-priced Techno-Commercial Bid).-Uploading the Integrity Pact with digital signature will be construed that all pages of the Integrity Pact have been signed by the bidder's authorized signatory who sign the Bid. Any bid not accompanied by Integrity Pact Proforma duly signed (digitally) by the bidder shall be rejected straightway.

**5.0** The bidders **must have Encryption Certificate along with Digital Signature Certificate (DSC) of Class 3 [Organization Type]** to upload all the documents. If the **Digital Signature Certificate (DSC)** used for signing is not of "**Class -3**" & Organizational type with Organization's name in the name of bidder (i.e. Firm's Name), the bid will be rejected.

**Note:** Only in case of sole proprietorship firms, Digital Signature Certificates issued in the name of the proprietor is also acceptable provided the bid is submitted in the capacity of a proprietorship firm.

**6.0** While submitting responses against the tender in e-tender portal, bidders must fill up the **"Total Bid Value"** (under RFx Information > Basic Data > Total Bid Value), taking account of all liabilities including statutory liabilities in their quoted price excluding PF and GST. The price quoted under the "Total Bid Value" should be within the range of **"At Par" to "+10%"** of Company's Internal Estimate. Bids with overall quoted price as indicated in the "Total Bid Value" (under RFx Information > Basic Data > Total Bid Value) below "at par" and above "10%" of Company's Internal Estimate will be rejected straightway.

Company shall evaluate the inter-se-ranking of the bidders and conduct Draw of Lots amongst the eligible bidders in case of identical bidding, strictly as per the overall quoted price under the "Total Bid Value" (under RFx Information > Basic Data > Total Bid Value) and awarding of contract shall be done accordingly.

It is the responsibility of the bidder to fill up the "Total Bid Value" (under RFx Information > Basic Data > Total Bid Value) correctly as per the instructions given herein. OIL INDIA LTD accepts no liability of any nature resulting from any calculation error or omissions while filling up the "Total Bid Value" (under RFx Information > Basic Data > Total Bid Value) by the bidders and no claim whatsoever shall be entertained thereof.

**7.0** The bids conforming to the specifications, terms and conditions stipulated in the tender documents and considered to be responsive will be evaluated as per the procedure mentioned below:

i. Bid will be opened on schedule date & time as specified in the NIT and all the bids where the bidders have quoted the lowest price (within the permissible percentage as per NIT) under the "Total Bid Value" tab in e-tender portal and who have submitted revised "One Time Security Deposit" in line with OIL's notification no.: CONT/CIV/988/2016 dated 01.07.2016, on or before 13:30 Hrs. of Bid Closing/Opening date of this tender will be selected for conducting Draw of Lots (DoL). In DoL, 3 (three) numbers of bidders will be selected first, in the order of B-1 (Bidder-1), B-2 and B-3. Scrutiny of these three bidders as per tender criteria will be carried out. If the bid of bidder B-1 is found to be

acceptable, B-1 will be the successful bidder (Priority-1 bidder) and the contract will be awarded to B-1. If B-1 is not found to be acceptable but B-2 is acceptable, B-2 will be awarded the contract, ---- and so on; i.e. whoever becomes the first acceptable bidder in the order of B-1-B-2-B-3, will be the successful bidder (P-1). In this way, P-1 (Priority-1) and P-2 bidders will be selected. The contract will be awarded to the P-1 bidder only. However, in case the bidder P-1 is not able to carry out the job due to any reason, P-2 may be awarded the job, if the same is approved by Company's competent authority. In case, none of these three bidders are found to be technically acceptable, the Draw of Lots will be again conducted to select 3 more bidders and similar steps will be followed thereon as explained above. The system of conducting further draw of lots will be followed till a qualified bidder is selected.

ii. Bidder should note that deficit documents will not be sought from the bidders. The bids will be evaluated as per the documents received from the bidders at the time of bid opening. Any bid, which is not supported with the requisite documents as per the NIT, will be rejected straightway without seeking any further clarification and deficit document.

**Note:**

a) The Company's Internal Estimated Rates, as indicated in Part-II, are inclusive of all overheads, taxes, duties, levies etc. except P.F. & GST.

b) Bidder must include all impale plant, labour, supervision, materials, erection of display board, sign/caution board, insurance, profit, taxes and duties, together with all general risks, liabilities in their quoted rates excluding PF and GST.

**(B). BID REJECTION CRITERIA (BRC):**

1. The bids are to be submitted in single stage under composite bid system i.e. Un-priced Techno-Commercial Bid and Price Bid together. The overall price should be quoted under the "Total Bid Value" tab in the e-tender portal taking into account all liabilities including statutory liabilities in their quoted price (excluding PF and GST). The bidder must upload the Undertaking as prescribed in **Proforma** under the "Notes and Attachments" tab.

2. Bid Documents / User Id & Password for OIL's E-Tender portal are not transferable.

3. Any bid received in the form of Physical document/ Telex/Cable/Fax/E-mail will not be accepted.

4. **Bidders must quote their total price under the "Total Bid Value" (under RFx Information > Basic Data > Total Bid Value) tab within the permissible limit ('at par' to above 10% of Company's Internal Estimate); otherwise the bid will be rejected straightway. If a bidder wants to quote at 'at par' with the Company's Internal Estimate, he must declare the "Total Bid Value" equal to the tender value mentioned in the Covering Letter. If a bidder wants to quote above the Internal Estimate by certain percentage, he must declare the "Total Bid Value" equal to the sum of Internal Estimate and the desired percentage of Internal Estimate. If any bidder has quoted the total price above "at par" with Company's Internal Estimate within the permissible range, the percentage quoted above the internal estimate will be calculated and will be loaded accordingly in the rates of each and every items as specified in the Price Bid. All other techno-commercial documents other than price details to be submitted with Un-priced Techno-Commercial Bid as per tender requirement in the c-Folder link (collaboration link) under "Technical RFx Response" Tab Page only.**

5. Bidders must accept and comply with the following provisions as given in the tender document. Deviations to such provisions shall make the bid liable for rejection.
    a. Firm price
    b. Scope of work
    c. Specifications
    d. Price schedule
    e. Delivery / completion schedule
    f. Period of validity of bid
    g. Liquidated Damages

h. Performance bank guarantee / Security deposit
i. Guarantee of material / work
j. Arbitration / Resolution of Dispute
k. Force Majeure
l. Applicable Laws
m. Revised One Time Security Deposit
n. Integrity Pact

**(C). GENERAL:**

**i.** Submission of Forged Documents: Bidders should note that Company may verify authenticity of all the documents /certificates / information submitted by the bidder(s) against the tender. In case at any stage of tendering process or Contract execution etc., if it is established that bidder has submitted forged documents / certificates / information towards fulfilment of any of the tender / contract conditions, Company shall immediately reject the bid of such bidder(s) or cancel / terminate the contract and forfeit EMD / SD submitted by the bidder(s), besides taking action as per OIL's Banning Policy available in the OIL's website.

ii. In case bidder takes exception to any clause of bidding document not covered under BEC/BRC, then the Company has the discretion to load or reject the offer on account of such exception if the bidder does not withdraw / modify the deviation when / as advised by company. The loading so done by the Company will be final and binding on the bidders. No deviation will however be accepted in the clauses covered under BRC.

iii. To ascertain the substantial responsiveness of the bid the Company reserves the right to ask the bidder for clarification in respect of clauses covered under BEC/BRC also and such clarifications fulfilling the BEC/BRC clauses in toto must be received on or before the deadline given by the company, failing which the offer will be evaluated based on the submission. However, mere submission of such clarification shall not make the offer responsive, unless Company is satisfied with the substantial responsiveness of the offer.

iv. If any of the clauses in the BEC/BRC contradicts with other clauses of bidding document elsewhere, the clauses in the BEC/BRC shall prevail.

v. Bidder(s) must note that requisite information/financial values etc. as required in the BEC/BRC & Tender are clearly understandable from the supporting documents submitted by the Bidder(s); otherwise Bids shall be rejected.

vi. OIL will not be responsible for delay, loss or non-receipt of applications for participating in the bid sent by mail and will not entertain any correspondence in this regard.

vii. If any of the clauses in the BEC/BRC contradicts with any of the clauses/disclaimer/guideline/user manual/report or any other field displayed in the e-tender portal, the clauses in the BEC/BRC shall prevail.

## WORKS CONTRACT

**DESCRIPTION OF WORK/SERVICES:** Construction of boundary wall, approach road and operator room cum IM room by earth filling the low laying area for placement of In-house Gas compressor inside Dikom GCS.

### GENERAL CONDITIONS OF CONTRACT (GCC)

MEMORANDUM OF AGREEMENT made this _____ day of _____ between OIL INDIA LIMITED a Company incorporated under the Companies Act 1956 and having its Registered Office at Duliajan in the District of Dibrugarh, Assam ( hereinafter called Company ) of the one part and Shri/Smti _____and Shri/Smti _____ carrying on business as partners /proprietor under the firm name and style of M/s._____ with the main Office at _____in the District of _____ aforesaid ( hereinafter called 'Contractor') on the other part.

**WITNESSETH:**

**1.** a) The contractor hereby agrees to carry out the work set down in the Schedule of work which forms Part-II of this Contract in accordance with the 1968 General Conditions of Contract of Oil India Limited and General Specifications read in conjunction with any drawings and Particular Specifications & instructions which forms Part-III of the contract utilizing any materials/services as offered by the Company as per Part-IV of the contract at location _____ .

b) In this Contract all words and expressions shall have the same meaning as are respectively assigned to them in the 1968 General Conditions of Contract of Oil India Limited which the Contractor has perused and is fully conversant with before entering into this Contract.

c) The clauses of this contract and of the specifications set out hereunder shall be paramount and in the event of anything herein contained being inconsistent with any term or terms of the 1968 General Conditions of Contract of Oil India Limited, the said term or terms of the 1968 General conditions of Contract to the extent of such inconsistency, and no further, shall not be binding on the parties hereto.

**2.** i) The contractor shall provide all labour, supervision and transport and such specified materials described in Part-II of the Contract including tools and plants as necessary for the work and shall be responsible for all royalties and other levies and his rates shall include for these. The work executed and materials supplied shall be to the satisfaction of the Company's Engineer and Contractor's rates shall include for all incidental and contingent work which although not specifically mentioned in this contract are necessary for its completion in a sound and workman like manner.

ii) Contractor shall have to produce the valid certificates (Forest Royalty Clearance Certificate) from the concerned departments, as per applicable rate towards forest produce used against the contract to HOD (Civil) prior to processing of final payment. In absence of valid certificates, the final bill shall not be processed.

**3.** The Company's Engineer shall have power to:
a) Reduce the rates at which payments shall be made if the quality of work although acceptable is not up to the required standard set forth in the OIL Standard Specifications which have been perused and fully understood by the Contractor.

b) Order the Contractor to remove any inferior material from the site and to demolish or rectify any work of inferior workmanship, failing which the Company's Engineer may arrange for any such work to be demolished or rectified by any other means at the Contractor's expenses.

c) Order the Contractor to remove or replace any workman/ supervisor/ engineer/ project-in-charge or any other contactor's personnel who he (The Engineer) considers incompetent or unsuitable; the Engineer's opinion as to the competence and suitability of any personnel engaged by the Contractor shall be final and binding on the Contractor.

d) Issue to the Contractor from time to time during the progress of the work such further drawings and instructions as shall be necessary for the purpose of proper and adequate execution and maintenance of the works and the Contractor shall carry out and be bound by the same.

e) Order deviations in Part II and III of this Contract. All such deviation orders shall be in writing and shall show the financial effect, if any, of such deviation and whether any extra time is to be allowed. The rates to be applied for such Deviation Order shall be the same for those appearing in Company's Schedule of Rate in force on the date of issue of such Deviation Order, to which the contractor has no objection.

**4.** The Contractor shall have no claim against the Company in respect of any work which may be withdrawn but only for work actually completed under this contract. The contractor shall have no objection to carry out work in excess of the quantities and items stipulated in Part-II (SOQ). In case of positive variation in quantities of any

items from the quantity mentioned in the tender / contract, the contractor will have to carry out the positive varied quantity at the contract rate, or the internally estimated rate, whichever is lower.

However, during the actual execution of the contract, if the contract is to be utilised in a different zone due to Company's operational requirement, and accordingly if the rates of the contractual items are different as in OIL's Schedule of Rates (SOR), then the rates as per the actual zone of execution will be applicable for the contractual items and shall be adopted from the same OIL's SOR which has been adopted in the tender. In that case, the rates shall be applicable for both the contractual quantities as well as for the additional quantities, if required to be executed.

If any additional items (items not covered in the tender / contract) are required to be executed during actual execution of works, the payment of such items shall be made as per the rates of OIL Schedule of Rates (SOR) prevailing in the working zone (the zone where the contract is utilized) at the time of issuance of advice by Company to execute such additional items.

**5.** The Company reserves the right to cancel this Contract at any time upon full payment of work done and the value of the materials collected by the contractor for permanent incorporation in the work under this contract particularly for execution of this contract up to the date of cancellation of the Contract. The valuation of the work done and the materials collected shall be estimated by the company's Engineer in presence of the contractor. The Contractor shall have no claim to any further payment whatsoever. The valuation would be carried out exparte if Contractor fails to turn up despite reasonable notice which will be binding on the Contractor.

**6.** The Contractor hereby undertakes to indemnify the Company against all claims which may arise under the under noted Acts:-

I. The Mines Act.
II. The Minimum Wages Act, 1948.
III. The Workman's Compensation Act, 1923.
IV. The Payment of wages Act, 1936.
V. The Payment of Bonus Act, 1965.
VI. The Contract Labour (Regulation & Abolition) Act, 1970 and the rules framed there under.
VII. Employees' Pension Scheme, 1995.
VIII. Inter-State Migrant (Regulation of Employment and Condition of Service) Act. 1979.
IX. The Employees Provident Fund and Miscellaneous Provisions Act, 1952.
X. Goods and Service Tax (GST) Law,

or any other Acts or Statute not here in above specifically mentioned having bearing over engagement of workers directly or indirectly for execution of work. The Contractor shall not make the Company liable to reimburse the Contractor for the statutory increase in the wage rates of the Contract Labour appointed by the Contractor. Such Statutory increase in the wage rates of Contract Labour shall be borne by the contractor.

**7.** The Contractor shall clear away all rubbish and surplus material from the site on completion of work and shall leave the site clean and tidy.

**8.** The Contractor must complete the work within **20 weeks** of the written order to commence work. During the currency of the job, the work progress must be commensurate with the time elapsed. In the event of any delay on the contractor's part, he/she will be liable to pay to the company liquidated damages at the rate of 1/2% (Half percent) per week of the contract price of the item(s) delayed in completion and the maximum value of the liquidated damage will be 7.5% of the contract price of the item(s) delayed provided the item(s) delayed are not critical for commissioning and final utilization of the work. If, however, the item(s) delayed in completion are critical for commissioning and final utilisation of the work then the contractor will be liable to pay liquidated damages by way of penalty at the rate of 1/2% (Half percent) per week of delay of the total contract cost subject to a maximum of 7.5% of total contract cost.

The HOD-Civil's certificate as to the criticality or otherwise of an item shall be final.

The payment of liquidated damages/penalty may be reduced or waived at the sole discretion of the Company whose decision in this regard will be final.

In the event of there being undue delay in execution of the Contract, the Company reserves the right to cancel the Contract and / or levy such additional damages as it deems fit based on the actual loss suffered by the company attributable to such delay. The company's decision in this regard shall be final.

**9.** In order to promote, safeguard and facilitate the general operational economic in the interest of the Company during the continuance of this contract the Contractor hereby agrees and undertakes not to take any direct or indirect interest and or support, assist, maintain or help any person or persons engaged in antisocial activities, demonstration, riots , or in any agitation prejudicial to the Company's interest and any such even taking shape or form at any place of the Company's works or and its neighbourhood.

**10.** The tendered all-inclusive Price (i.e. the Contract price) is ₹ _____ ***(Not to be filled up by bidder while submitting the offer in c-Folder. This figure will be filled up by OIL at the time of award of the***

***contract to the successful bidder.)*** (₹_____ only ) but the Company shall pay the Contractor only for actual work done at the all inclusive rates set down in the Schedule of work part II of this Contract.

On account payment may be made, not oftener than monthly, up to the amount of 92.5% of the value of work done. Final payment will be made only after satisfactory completion of the work. Such final payment shall be based on the work actually done allowing for deviations and any deductions and the measurement shall be checked and certified correct by the Company's Engineer before any such final payment is made.

**11.** The contractor employing 20 (twenty) or more workmen on any day preceding 12 months shall be required to obtain requisite licence at his cost from the appropriate Licensing Officer before undertaking any Contract work. The Contractor shall also observe the rules & regulations framed under the Contract Labour (Regulation & Abolition) Act.

**12.** Wages shall be paid by the Contractor to the workmen directly without any intervention of any Jamadars or Thekaders and that the Contractor shall ensure that no amount by way of commission or otherwise be deducted/ recovered by the Jamadar from the wages of the workmen.

**13.** The Company for any reason whatsoever and of which the company shall be sole judge may terminate this Contract with a 24 hours notice in writing to the Contractor and in the event of Company's so doing the clause 5 here of shall prevail and the accounts between the parties will be in accordance therewith finalised.

**14.** The Contractor will not be allowed to construct any structure (for storage / housing purpose) with thatch, bamboo or any other inflammable materials within any company's fenced area.

**15.** The Contractor shall ensure that all men engaged by him/her are provided with appropriate protective clothing and safety wear in accordance with the Oil Mines Regulations 2017. The Company's representative shall not allow/accept those men who are not provided with the same.

**16.** All Statutory taxes levied by the Central and State Government or any other competent authority from time to time, except PF & GST, will be borne by Contractor and the contract cost is inclusive of all tax liabilities except PF & GST. However, any subsequent increase in such statutory taxes after bid opening day will be borne by the Company. Similarly if there is any decrease in such statutory taxes after bid opening, the Company shall recover the decreased amount of such taxes from the contractor.

**17.** The Contractor shall deploy local persons in all works.

**18.** The Contractor shall not engage minor labour below 18(eighteen) years of age under any circumstances.

**19.** The Contractor and his/her workmen shall strictly observe the rules and regulations as per Mines Act (Latest editions).

**20. <u>SPECIAL CONDITIONS</u>**:

a) The Contractor shall obtain and submit the Labour Clearance Advice (LCA) / Labour Clearance Certificate (LCC) within 14 days of signing the contract agreement. If the contractor fails to submit the LCA / LCC within 14 days of signing the contract agreement, the period of delay in submission of LCA / LCC shall be deducted from the contractual period while issuing the work order. In such cases, the time period mentioned in Clause No. 8 of GCC (Part-I of this contract) shall not be applicable and the contactor must complete the work within the reduced time period allotted to the contractor as per the work order issued.

However, if submission of LCA / LCC is delayed, under some exceptional circumstances, for any reason not attributable to the contractor, the same should be recorded by the contractor with documentary proof. In such cases, the decision as to whether the reason of delay is attributable to the contractor or not shall be taken by the Head of Civil Engineering Department and the work order will be issued accordingly.

b) Retention Money @ 7.5 % will be kept as Performance Security Deposit against the contract and will be deducted from the running bill in addition to 2.5% submitted as Performance Security after issue of LOI/LOA. The amount of retention money and performance security deposit shall be released after defect liability period under the contract (including extension, if any). A part or whole of retention money and performance security shall be used by the Company in realisation of liquidated damage or claims, if any, or for adjustment of compensation or loss due to the Company for any reason. The retention money and performance security shall not earn any interest.

c) The contractor will be required to allow OIL Officials to inspect the work site and documents in respect of the workers' payment.

d) Contractor(s) whosoever is liable to be covered under the P.F. Act must ensure strict compliance of provisions of the Employees Provident Fund and Miscellaneous Provisions Act, 1952 in addition to the various Acts mentioned elsewhere in this contract. Any contractor found violating these provisions will render themselves disqualified from any future tendering. As per terms of the contract, if applicable, the Contractor must deposit Provident Fund

Contribution (covering Employee's & employer's share) with the competent authority monthly under their direct code. 12% P.F. will be applicable on the wage component of the contract cost. Wage component of the Contract cost is **16.47** %.

Contract Cost excluding PF: The P.F deposited by the Contractor, will be reimbursed on production of documentary evidence of depositing the same to the authority concerned.

Contract Cost including PF: The Contractor shall be required to submit documentary evidence of deposit of P.F. Contribution to the Company. In case of failure to provide such documentary evidence, the Company reserves the right to withhold the amount equivalent to P.F. Contribution on wage component.

e) All safety precautions to be maintained by the Contractor at his own cost as per safety rules and regulations.

f) The Contractor shall use pump if needed for dewatering of pit while excavation for which no extra payment will be made.

g) The Contractor shall have to work during rainy seasons also.

h) Watch and ward, loss or damage to Company's property, theft and other incidental charges shall be Contractor's responsibility.

i) Efficient workmen to be engaged by the Contractor.

j) The Contractor's representative should report to Engineer-in-charge on all working days at 7.00 A.M. and 3.00 P.M. for instructions.

k) Materials if rejected should be removed from site within 48 (forty- eight) hours of rejection, failing which the Company reserves the right to get the rejected materials removed at the risk and cost of the Contractor.

l) The Company reserves the right to get the part or whole work complete at the risk and cost of the Contractor if he fails to complete the work within the stipulated time without any valid reason. The Company's decision shall be final and binding on the Contractor.

m) Water that may accumulate on the site during progress of the works or in trenches and excavations from other than accepted risks shall be removed from the site to entire satisfaction of the Engineer-in-charge and at the Contractor's expense.

n) The Contractor shall be in a position to execute 2(two) locations simultaneously.

o) If required, the Contractor shall have to work in two shifts for which no extra payment will be admissible to him/them.

p) If needed water and electricity will have to be arranged by the Contractor at his own cost.

q) The Contractor and his workmen are to strictly observe the safety precautionary rules as per Mines Act (Latest edition) while executing the work.

r) The Contractor shall have to provide temporary latrine facilities in the entire work site for use of their workmen during progress of work.

s) The contractor himself (the signatory of the contract) must visit the site at least twice in a week as fixed for taking necessary instruction from the Engineer-in charge.

t) The program of works to be submitted in the form of Bar Chart within 3 days of receipt of work order.

**21. SPECIAL INSTRUCTION**

The contractor must quote considering the prevailing minimum Labour wage rate for each day of work.

**22. <u>GOODS AND SERVICES TAX (GST) CLAUSES UNDER GCC</u>**

**22.1 GENERAL REMARKS ON TAXES & DUTIES:**

In view of **GST** Implementation from 1st July 2017, all taxes and duties including Excise Duty, CST/VAT, Service tax, Entry Tax and other indirect taxes and duties have been submerged in **GST**. Accordingly reference of Excise Duty, Service Tax, VAT, Sales Tax, Entry Tax or any other form of indirect tax except of **GST** mentioned in the bidding document shall be ignored.

**22.2** Bidders are required to submit copy of the GST Registration Certificate while submitting the bids wherever **GST** (CGST & SGST/UTGST or IGST) is applicable.

**22.3** "**GST**" shall mean Goods and Services Tax charged on the supply of material(s) and services. The term "**GST**" shall be construed to include the Integrated Goods and Services Tax (hereinafter referred to as "IGST") or Central Goods and Services Tax (hereinafter referred to as "CGST") or State Goods and Services Tax (hereinafter referred to as "SGST") or Union Territory Goods and Services Tax (hereinafter referred to as "UTGST") depending upon the import / interstate or intrastate supplies, as the case may be. It shall also mean GST compensation Cess, if applicable.

**22.4** Quoted price/rate(s) should be inclusive of all taxes and duties, except **GST (i.e. IGST or CGST and SGST/UTGST applicable in case of interstate supply or intra state supply respectively and cess on GST if applicable) on the final service**. Please note that the responsibility of payment of GST (CGST & SGST or IGST or UTGST) lies with the Supplier of Goods /Services (Service Provider) only. Supplier of Goods / Services (Service Provider) providing taxable service shall issue an Invoice/ Bill, as the case may be as per rules/ regulation of **GST**. Further, returns and details required to be filed under GST laws & rules should be timely filed by Supplier of Goods / Services (Service Provider) with requisite details.

**22.5 Where OIL is entitled to avail the input tax credit of GST**:

OIL will reimburse the **GST** to the Supplier of Goods / Services (Service Provider) at actuals against submission of Invoices as per format specified in rules/ regulation of GST to enable OIL to claim input tax credit of **GST** paid. In case of any variation in the executed quantities, the amount on which the **GST** is applicable shall be modified in same proportion. Returns and details required to be filed under GST laws & rules should be timely filed by supplier with requisite details.

**22.6 Where OIL is not entitled to avail/take the full input tax credit of GST**:

OIL will reimburse **GST** to the Supplier of Goods / Services (Service Provider) at actuals against submission of Invoices as per format specified in rules/ regulation of **GST**.

**22.7** Payments to Service Provider for claiming **GST** amount will be made provided the above formalities are fulfilled. Further, OIL may seek copies of challan and certificate from Chartered Accountant for deposit of **GST** collected from OIL.

**22.8** Contractor/vendor shall be required to issue tax invoice in accordance with GST Act and/or Rules so that input credit can be availed by OIL. In the event that the contractor / vendor fails to provide the invoice in the form and manner prescribed under the GST Act read with GST Invoicing Rules thereunder, OIL shall not be liable to make any payment on account of **GST** against such invoice.

**22.9** **GST** shall be paid against receipt of tax invoice and proof of payment of **GST** to government. In case of non-receipt of tax invoice or non-payment of **GST** by the contractor/vendor, OIL shall withhold the payment of **GST**.

**22.10** **GST** payable under reverse charge mechanism for specified services or goods under GST act or rules, if any, shall not be paid to the contractor/vendor but will be directly deposited to the government by OIL.

**22.11** Where OIL has the obligation to discharge **GST** liability under reverse charge mechanism and OIL has paid or is /liable to pay **GST** to the Government on which interest or penalties becomes payable as per GST laws for any reason which is not attributable to OIL or ITC with respect to such payments is not available to OIL for any reason which is not attributable to OIL, then OIL shall be entitled to deduct/ setoff / recover such amounts against any amounts paid or payable by OIL to Contractor / Supplier.

**22.12** Notwithstanding anything contained anywhere in the Agreement, in the event that the input tax credit of the **GST** charged by the Contractor / Vendor is denied by the tax authorities to OIL for reasons attributable to Contractor / Vendor, OIL shall be entitled to recover such amount from the Contractor / Vendor by way of adjustment from the next invoice. In addition to the amount of **GST**, OIL shall also be entitled to recover interest at the rate prescribed under GST Act and penalty, in case any penalty is imposed by the tax authorities on OIL.

**22.13** TDS under GST, if applicable, shall be deducted from contractor's/vendor's bill at applicable rate and a certificate as per rules for tax so deducted shall be provided to the contractor/vendor.

**22.14** The Contractor will be under obligation for charging correct rate of tax as prescribed under the respective tax laws. Further the Contractor shall avail and pass on benefits of all exemptions/concessions available under tax laws. Any error of interpretation of applicability of taxes/ duties by the contractor shall be to contractor's account.

**22.15** Further, it is the responsibility of the bidders to make all possible efforts to make their accounting / IT system GST compliant in order to ensure availability of Input Tax Credit (ITC) to Oil India Ltd.

**22.16** Beyond the contract period, in case OIL is not entitled for input tax credit of **GST**, then any increase in the rate of **GST** beyond the contractual delivery period (in case the delay is attributable to the service provider),

shall be to Service provider's account whereas any decrease in the rate of **GST** shall be passed on to the OIL.

Beyond the contract period, in case OIL is entitled for input tax credit of **GST**, then statutory variation in applicable **GST** on supply and on incidental services, shall be to OIL's account.

Claim for payment of **GST**/ Statutory variation, should be raised within two [02] months from the date of issue of 'Government Notification' for payment of differential (in %) **GST**, otherwise claim in respect of above shall not be entertained for payment of arrears.

**22.17** The contractor will be liable to ensure to have registered with the respective tax authorities, wherever applicable, and to submit self-attested copy of such registration certificate(s) and the Contractor will be responsible for procurement of material in its own registration (GSTIN) and also to issue its own Road Permit/ E-way Bill, if applicable etc.

**22.18 Documentation requirement for GST**

The vendor will be under the obligation for invoicing correct tax rate of tax/duties as prescribed under the GST law to OIL, and pass on the benefits, if any, after availing input tax credit.

Any invoice issued shall contain the following particulars

a) Name, address and GSTIN of the supplier;
b) Serial number of the invoice;
c) Date of issue;
d) Name, address and GSTIN or UIN, if registered of the recipient;
e) Name and address of the recipient and the address of the delivery, along with the State and its code,
f) HSN code of goods or Accounting Code of services[SAC];
g) Description of goods or services;
h) Quantity in case of goods and unit or Unique Quantity Code thereof;
i) Total value of supply of goods or services or both;
j) Taxable value of supply of goods or services or both taking into discount or abatement if any;
k) Rate of tax (IGST,CGST, SGST/ UTGST, cess);
l) Amount of tax charged in respect of taxable goods or services (IGST,CGST, SGST/UTGST, cess);
m) Place of supply along with the name of State, in case of supply in the course of interstate trade or commerce;
n) Address of the delivery where the same is different from the place of supply and
o) Signature or digital signature of the supplier or his authorised representative.

GST invoice shall be prepared in triplicate, in case of supply of goods, in the following manner

i. The original copy being marked as ORIGINAL FOR RECIPIENT;
ii. The duplicate copy being marked as DUPLICATE FOR TRANSPORTER and
iii. The triplicate copy being marked as TRIPLICATE FOR SUPPLIER.

**22.19 ANTI-PROFITEERING CLAUSE**

In case the GST rating of vendor on the GST portal / Govt. official website is negative / black listed, then the bids may be rejected by OIL. Further, in case rating of bidder is negative / black listed after award of work for supply of goods / services, then OIL shall not be obligated or liable to pay or reimburse GST to such vendor and shall also be entitled to deduct / recover such GST along with all penalties / interest, if any, incurred by OIL.

**22.20** OIL will prefer to deal with registered bidder under GST. Therefore, bidders are requested to get themselves registered under GST, if not registered yet.

**23. SETTLEMENT OF DISPUTES:**

**23.1 Arbitration (Applicable for Suppliers/CONTRACTORs other than PSU and MSME):**

1. Except as otherwise provided elsewhere in the contract, if any dispute, difference, question or disagreement arises between the parties hereto or their respective representatives or assignees, in connection with construction, meaning, operation, effect, interpretation of the contract or breach thereof which parties are unable to settle mutually, the same shall be referred to Arbitration as provided hereunder:

2. A party wishing to commence arbitration proceeding shall invoke Arbitration Clause by giving 30 days notice to the other party. The notice invoking arbitration shall specify all the points of dispute with details of the amount claimed to be referred to arbitration at the time of invocation of arbitration and not thereafter. If the claim is in foreign currency, the claimant shall indicate its value in Indian Rupee for the purpose of constitution of the arbitral tribunal.

3. It is agreed and undertaken by the Parties that irrespective of country of origin of the CONTRACTOR, the arbitration proceedings shall be governed by the Arbitration and Conciliation Act, 1996 and under no circumstances, the proceedings shall be construed as International Arbitration.

4. The number of arbitrators and the appointing authority will be as under:

| Claim amount (excluding claim for interest and counter claim, if any) | Number of Arbitrator | Appointing Authority |
|---|---|---|
| Upto Rs.25.00 Lakh | Not applicable | Not applicable |
| Above Rs.25.00 Lakh Upto Rs.25 Crore | Sole Arbitrator | OIL |
| Above Rs.25 Crore | 3 Arbitrators | One Arbitrator by each party and the 3rd Arbitrator, who shall be the presiding Arbitrator, by the two Arbitrators. |

5. The parties agree that they shall appoint only those persons as arbitrators who accept the conditions of the arbitration clause. No person shall be appointed as Arbitrator or Presiding Arbitrator who does not accept the conditions of the arbitration clause.

6. If any of the Arbitrators so appointed dies, resigns, becomes incapacitated or withdraws for any reason from the proceedings, it shall be lawful for the concerned party/arbitrators to appoint another person in his place in the same manner as aforesaid. Such person shall proceed with the reference from the stage where his predecessor had left if both parties consent for the same; otherwise, he shall proceed de novo.

7. Parties agree and undertake that neither shall be entitled for any pre-reference or pendente-lite interest on its claims. Parties agree that any claim for such interest made by any party shall be void.

8. The arbitral tribunal shall complete the proceedings, make and publish the award within time stipulated in the Arbitration and Conciliation Act, 1996(as amended).

9. If after commencement of the arbitration proceedings, the parties agree to settle the dispute mutually or refer the dispute to conciliation, the arbitrators shall put the proceedings in abeyance until such period as requested by the parties. Where the proceedings are put in abeyance or terminated on account of mutual settlement of dispute by the parties, the fees payable to the arbitrators shall be determined as under:

   (i) 20% of the fees if the claimant has not submitted statement of claim.
   (ii) 40% of the fees if the pleadings are complete
   (iii) 60% of the fees if the hearing has commenced.
   (iv) 80% of the fees if the hearing is concluded but the award is yet to be passed.

10. Each party shall be responsible to make arrangements for the travel and stay etc. of the arbitrator appointed by it. Claimant shall also be responsible for making arrangements for travel/stay arrangements of the Presiding Arbitrator and the expenses incurred shall be shared equally by the parties.

    In case of sole arbitrator, both parties shall equally share all expenditures that may be required to be incurred.

11. The fees and other administrative/secretarial expenses of the arbitrator(s) shall not exceed the model fee as stipulated in Schedule of the Act and such expenses shall be equally borne by the parties.

12. The Place/Seat of Arbitration shall be Guwahati or the place where the contract is executed. The venue of the arbitration shall be decided by the Arbitrator(s) in discussion with the parties. The cost of arbitration sittings shall be equally borne by the parties.

13. The Arbitrator(s) shall give reasoned and speaking award and it shall be final and binding on the parties.

14. Subject to aforesaid, provisions of the Arbitration and Conciliation Act, 1996 and any statutory modifications or re-enactment thereof shall apply to the arbitration proceedings under this clause.

**23.2 Arbitration (applicable in case of Contract awarded on Public Sector Enterprise):**

a) In the event of any dispute or difference relating to the interpretation and application of the provisions of commercial contract (s) between Central Public Sector Enterprises (CPSEs) and also between CPSEs and Government Departments/Organizations (excluding disputes -concerning Railways, Income Tax, Customs & Excise Departments), such dispute or difference shall be taken up by either party for resolution through AMRCD as mentioned in OPE OM No. 4(1)/2013-DPE(GM)/FTS-1835 dated 22-05-2018.

b) A party wishing to commence arbitration proceeding shall invoke Arbitration Clause and refer the dispute(s) to AMRCD with a copy to the other party. The notice invoking arbitration shall specify all the points of dispute with details of the amount claimed to be referred to arbitration at the time of invocation of arbitration and not thereafter.

c) Upon such reference, the dispute shall be decided by the Competent Authority appointed under the AMRCD, whose decision shall bind the parties finally and conclusively. The parties in the dispute will share equally the cost of the arbitration as intimated by the Arbitrator.

**23.3 Arbitration (Applicable to Micro, Small and Medium Enterprise)**

In the event of any dispute or difference relating to, arising from or connected with the Contract, efforts shall be made to resolve the dispute(s) amicably by mutual consultation and in case such dispute(s) cannot be resolved through mutual consultation, then same shall be resolved through the procedure as prescribed in Section-18 of the Micro, Small and Medium Enterprises Development Act, 2006.

**23.4 Resolution of disputes through conciliation by OEC**

(Not Applicable in cases where value of dispute is less than Rs. 25 Lakh and more than 2 Crore)

If any dispute, difference, question or disagreement arises between the parties hereto or their respective representatives or assignees, in connection with construction, meaning, operation, effect, interpretation of the contract or breach thereof which parties are unable to settle mutually, Company at its discretion, on its own or on the request of the CONTRACTOR, may refer the dispute to Outside Expert Committee ("OEC") to be constituted by Corporate Business Committee (CBC), OIL as provided hereunder:

a) The party desirous of resorting to conciliation shall send a notice of 30 (thirty) days to the other party of its intention of referring the dispute for resolution through OEC. The notice invoking conciliation shall specify all the points of disputes with details of the amount claimed to be referred to OEC and the party concerned shall not raise any new issue thereafter.

b) OIL shall nominate three outside experts, one each from Financial/commercial, Technical and Legal fields from the Panel of Outside Experts maintained by OIL who shall together be referred to as OEC (Outside Experts Committee).

c) Parties shall not claim any interest on claims/counterclaims from the date of notice invoking conciliation till execution of settlement agreement, if so arrived at. In case, parties are unable to reach a settlement, no interest shall be claimed by either party for the period from the date of notice invoking conciliation till the date of OEC recommendations in any further proceeding.

d) The Proceedings of the OEC shall be broadly governed by Part III of the Arbitration and Conciliation Act, 1996 including any modifications thereof. Notwithstanding above, the proceedings shall be summary in nature and Parties agree to rely only upon documentary evidence in support of their claims and not to bring any oral evidence in the OEC proceedings.

e) OEC shall hear both the parties and recommend possible terms of settlement between the parties. The recommendations of OEC shall be non-binding and the parties may decide to accept or not to accept the same. Parties shall be at liberty to accept the OEC recommendation with any modification they may deem fit.

f) Where recommendations are acceptable to both the parties, a settlement agreement will be drawn up in terms of the OEC recommendations or with such modifications as may be agreed upon by the parties. The settlement agreement shall be signed by both the parties and authenticated by all the OEC members either in person or through circulation. This settlement agreement shall have the same legal status and effect as that of an arbitration award on agreed terms on the substance of the dispute rendered by an arbitral tribunal under Section 30 of the Arbitration and Conciliation Act, 1996.

g) OIL will share all other guidelines regarding reconciliation through OEC with the CONTRACTOR when it resorts to settlement through OEC. Both parties agree to adhere to these guidelines.

h) All the expenditure incurred in the OEC proceedings shall be shared by the parties in equal proportion. The parties shall maintain account of expenditure and present to the other for the purpose of sharing on conclusion of the OEC proceedings.

i) The OEC proceedings must be completed within a period of 3(three) months from the date of constitution of the OEC with a provision of extension of one months, subject to mutual agreement. The Place of OEC shall be either at New Delhi or Guwahati.

j) If the parties are not able to resolve the dispute through OEC or do not opt for conciliation through OEC, the party may invoke arbitration clause as provided in the contract.

k) The parties shall be represented by their in-house employees/executives. No party shall bring any advocate or outside consultant/advisor/agent. Ex-officers of OIL who have handled the matter in any capacity directly or indirectly shall not be allowed to attend and present the case before OEC on behalf of Contractor. However, ex- employees of parties may represent their respective organizations.

l) Solicitation or any attempt to bring influence of any kind on either OEC Members or OIL is completely prohibited in conciliation proceedings and OIL reserves the absolute right to close the conciliation proceedings at its sole discretion if it apprehends any kind of such attempt made by the Contractor or its representatives.

**23.5 Exclusions**

Parties agree that following matters shall not be referred to conciliation or arbitration:

i) Any claim, difference or dispute relating to, connected with or arising out of OIL's decision to initiate any proceedings for suspension or debarment or banning, or decision to suspend or to ban or to debar business dealings with the bidder/CONTRACTOR and/or with any other person involved or connected or dealing with bid/contract/bidder/CONTRACTOR.

ii) Any claim, difference or dispute relating to, connected with or arising out of OIL's decision under the provisions of Integrity Pact executed between OIL and the Bidder/CONTRACTOR.

iii) Any claim, difference or dispute relating to, connected with or arising out of OIL's decision to comply with any order or directive of any statutory or government authority.

iv) Any claim which is less than Rs. 25 Lakh.

**24. <u>FORCE MAJEURE:</u>**

In the event of either party being rendered unable by 'Force Majeure' to perform any obligation required to be performed by them under the contract, the relative obligation of the party affected by such 'Force Majeure' will stand suspended as provided herein. The term force majeure as employed herein shall mean Acts of God such as earthquake, hurricane, typhoon, flood, volcanic activity etc.; war (declared / undeclared); riot, revolts, rebellion, terrorism, sabotage by persons other than the CONTRACTOR's Personnel; fires, explosions, ionising radiation or contamination by radio-activity or noxious gas, if not caused by CONTRACTOR's fault; declared epidemic or disaster; acts and regulations of respective Govt. of the two parties, namely the COMPANY and the CONTRACTOR and civil commotions, lockout not attributable to the CONTRACTOR.

Upon occurrence of such cause, the party claiming that it has been rendered unable as aforesaid thereby, shall notify the other party in writing within 72 (Seventy Two) hours of the alleged beginning and ending thereof, giving full particulars and satisfactory evidence in support of its claim.

Should 'force majeure' condition as stated above occurs and should the same be notified within 72 (Seventy two) hours after its occurrence the `force majeure' rate (if specified in the SCC of the Contract) shall apply for the first 15 (fifteen) days for each such occasion.

Either party shall have the right to terminate the Contract if such 'force majeure' conditions continue beyond successive 60 (Sixty) days [or exclusively mentioned in the SCC of the Contract] with prior written notice of 15 days, provided termination of the Contract does not result into safety hazard to the life and property on account of withdrawal of operations or the operation is at critical stage. COMPANY shall have the absolute right to decide whether any safety hazard exists or operation is at critical position and decision of the COMPANY shall binding upon the CONTRACTOR.

Should either party decide not to terminate the Contract even under such condition, no payment would apply after expiry of fifteen (15) days force majeure period. [or exclusively mentioned in the SCC of the Contract]

Time for performance of the relative obligation suspended by Force Majeure shall then stand extended by the period for which such cause lasts.

If however, relative obligation of the party affected by such 'Force Majeure' is limited to part of the obligation(s), the contract shall not be terminated and the parties shall continue to perform their respective obligations, which are not affected by the 'force majeure' condition, provided the obligations affected by the 'force majeure' do not preclude the parties in performing the obligations not affected by such conditions.

**25. I.B. VERIFICATION REPORT AND SECURITY REVIEW:**

Contractor will be required to submit the verification report to ascertain character and antecedents from the Civil Administration towards the persons engaged under this contract to the Head of the user Department before engagement.

**26.** In case of any doubt or dispute as to the interpretation of any clause herein contained, the decision of the Company's Engineer shall be final and binding on the contractor.

**27. SET OFF CLAUSE:**

"Any sum of money due and payable to the contractor (including Security Deposit refundable to them) under this or any other contract may be appropriated by Oil India Limited and set off against any claim of Oil India Limited (or such other person or persons contracting through Oil India Limited) for payment of a sum of money arising out of this contract or under any other contract made by the contractor with Oil India Limited (or such other person or persons contracting through Oil India Limited)."

**28. COMMISSION OF MISCONDUCT / SUBMISSION OF FRAUDULENT DOCUMENT BY THE BIDDER/CONTRACTOR AND BANNING THEREOF:** The information and documents furnished by the bidder/CONTRACTOR in respect of the tender/contract are accepted by COMPANY to be true and genuine. However, if it comes to the notice of the COMPANY anytime either during the pendency of the tender or after award of the contract or after completion the contract that a Bidder/CONTRACTOR furnished fraudulent document/false information in relation to the subject tender/contract or committed any misconduct, appropriate action shall be taken against the Bidder/CONTRACTOR for debarment/banning of the bidder/CONTRACTOR from participating in any future tender of the COMPANY in terms of the COMPANY's Banning Policy besides making the CONTRACTOR liable for other penal action including termination of ongoing contract(s) at his/her risk and peril. In such event, the Bid Security/Performance Security in respect of ongoing contract(s) shall be forfeited by the COMPANY.

**29. ERRING / DEFAULTING AGENCIES:** Erring and defaulting agencies like bidder, contractor, supplier, vendor, service provider will be dealt as per OIL's Banning Policy available in OIL's website: www.oil-india.com. Moreover, OIL reserves the right to take legal or any other action on the basis of merit of the case.

**30. TERMINATION:**

a) **Termination on expiry of the contract:** This Agreement shall be deemed to have been automatically terminated on the expiry of the contract period unless OIL has exercised its option to extend this contract in accordance with the provisions, if any, of this contract.

b) **Termination of contract for death:** If the CONTRACTOR is an individual or a proprietary concern and the individual or the proprietor dies or if the CONTRACTOR is a partnership concern and one of the partners dies then unless, the COMPANY is satisfied that the legal heir of the individual or the proprietary concern or the surviving partners are capable of carrying out and completing Contract, the COMPANY is entitled to cancel the Contract for the uncompleted part without being in any way liable for any compensation payment to the estate of the deceased CONTRACTOR and/or to the surviving partners of the CONTRACTOR's firm on account of the cancellation of Contract. The decision of the COMPANY in such assessment shall be final & binding on the parties. In the event of such cancellation, the COMPANY shall not hold the estate of the deceased CONTRACTOR and/or the surviving partners of CONTRACTOR's firm liable for any damages for non-completion of the Contract.

c) **Termination on account of Force Majeure:** Unless the contract provides otherwise, either party shall have the right to terminate this Contract on account of Force Majeure as set forth in Article-24.0 above.

d) **Termination on account of insolvency:** In the event that the CONTRACTOR or its collaborator or its guarantor at any time during the term of the Contract, becomes insolvent or makes a voluntary assignment of its assets for the benefit of creditors or is adjudged bankrupt or under the process of insolvency or liquidation, then the COMPANY shall, by a notice in writing have the right to terminate the Contract and all the CONTRACTOR's rights and privileges hereunder, shall stand terminated forthwith.

However, COMPANY shall be at liberty to give the Receiver or Liquidator or Insolvency Professional Manager, as appointed by the Competent Court/Tribunal, the option of carrying out the Contract subject to its technical & financial competence and his providing a guarantee for due and faithful performance of the Contract.

e) **Termination for Unsatisfactory Performance:** If the COMPANY considers that, the performance of the CONTRACTOR is unsatisfactory, or not as per the provision of the Contract, the COMPANY shall notify the CONTRACTOR in writing and specify in details the cause of dissatisfaction. The COMPANY shall have the option to terminate the Contract by giving 15 days' notice in writing to the CONTRACTOR, if CONTRACTOR fails to comply with the requisitions contained in the said written notice issued by the COMPANY. In the event CONTRACTOR rectifies its non-performance to the satisfaction of the COMPANY, the option of termination may not be exercised by the COMPANY. If however CONTRACTOR repeats non-performance subsequently, COMPANY shall exercise the option to terminate contract by giving 07 days' notice. Such CONTRACTOR shall be put on holiday as per the Banning Policy of OIL [available at www.oil-india.in].

f) **Termination due to change of ownership and Assignment:** In case the CONTRACTOR's rights and /or obligations under this Contract and/or the CONTRACTOR's rights, title and interest to the equipment/ material, are transferred or assigned without the COMPANY's written consent, the COMPANY may at its option, terminate this Contract. COMPANY shall not be however under any obligation to accord consent to the CONTRACTOR for change of ownership & assignment of the contract.

g) If at any time during the term of this Contract, breakdown of CONTRACTOR's equipment results in CONTRACTORs being unable to perform their obligations hereunder for a period of 15 successive days, COMPANY at its option, may terminate this Contract in its entirety or partially to the extent of non-performance, without any further right or obligation on the part of the COMPANY, except for the payment of money then due. No notice shall be served by the COMPANY under the condition stated above.

h) Notwithstanding any provisions herein to the contrary, the Contract may be terminated at any time by the COMPANY on giving 30 (thirty) days written notice to the CONTRACTOR due to any other reason not covered under the above Article from (a) to (g) and in the event of such termination the COMPANY shall not be liable to pay any cost or damage to the CONTRACTOR except for payment of services as per the Contract upto the date of termination.

i) **Consequence of Termination:** In all cases of termination herein set forth, the relative obligations of the parties to the Contract shall be limited to the period up to the date of termination. Notwithstanding the termination of this Contract, the parties shall continue to be bound by the provisions of this Contract that reasonably require some action or forbearance after such termination.

Upon termination of this Contract, CONTRACTOR shall return to COMPANY all of COMPANY's properties, which are at the time in CONTRACTOR's possession.

In the event of termination of contract, COMPANY will issue Notice of termination of the contract with date or event after which the contract will be terminated. The contract shall then stand terminated and the CONTRACTOR shall demobilize their personnel & materials. No demobilization charges shall be payable by COMPANY in case of Article from (d) to (g).

**31. SUB-LETTING:** The contractor shall not sub-let the WHOLE of the Works. Except where otherwise provided by the contract, the Contractor shall not sub-let any PART of the Works without the written consent of the Engineer-in-Charge and such consent, if given, shall not relieve the Contractor from any liability or obligation under the Contract and he shall be responsible for the acts, defaults or neglects of any sub-contractor, his agents, servants or workmen, provided always that the provision of labour on a piece-work basis shall not be deemed to be a sub-letting under this Clause.

IN WITNESS thereof, each party has executed this contract at Duliajan, Assam as of the date shown above.

Signed, Sealed and Delivered,

| **For and on behalf of Contractor** | **For and on behalf of Company** |
|---|---|
| M/s. _____<br><br>Address _____<br><br>_____ | Oil India Limited<br>Duliajan, Dibrugarh<br>Assam- 786602 |
| Signature _____<br><br>Name of<br>Signatory _____ | Signature _____<br><br>Name of<br>Signatory _____ |
| Seal of Contractor's firm | Seal of Signatory |
| (In presence of)<br><br>Signature _____<br><br>Name _____ | (In presence of)<br><br>Signature _____<br><br>Name _____ |

# WORKS CONTRACT

## SCHEDULE OF WORK, UNIT AND QUANTITY

| SL. NO. | DESCRIPTION OF SERVICE | UOM | QUANTITY | UNIT PRICE | TOTAL |
|---|---|---|---|---|---|
| | GROUP A | | | | |
| | SECTION A | | | | |
| 1 | Levelling and dressing roadsides and verges including dressing the area and cutting earth upto 150mm depth and filling depression and breaking large earth lumps as directed. | M2 | 2187.80 | 19.77 | 43252.81 |
| 2 | Collecting / excavating sand, soil, silt, ordinary earth from any source, load into lorries, transport it to distant place of work including procuring earth and laying in layer of 150mm thickness and compacting, profile properly made for taking measurement, including all measurable lead upto 30m and lift as required. (The contractor shall be responsible for all formalities of supply of earth such as purchase of land including royalties, monopoly / other statutory taxes as required from any distance.) | M3 | 1960.00 | 473.89 | 928824.40 |
| 3 | Spreading gravel, pea-gravel or brick bat over sunken road surface, including carrying from a distance of 30.00m. | M3 | 60.00 | 363.78 | 21826.80 |
| 4 | CONSTRUCTIONS OF 150 MM THICK (CONSOLIDATED) GRAVELLED ROAD including providing well compacted side berms with earth on either sides, one metre wide and 50mm thick above final level of gravelled road, dressing sub-grade (including cutting of earth up to 75mm deep) to required level, spreading gravel in two layers with bindage of dry earth and dry rolling each layer separately until fully compacted and finally spreading sand shingles uniformly to 25mm thick and re-rolled as directed.(Ref. to MoRTH Spec.401)(Road roller provided by contractor). | M2 | 765.90 | 120.10 | 91984.59 |
| 5 | CONSTRUCTION OF WATER BOUND MACADAM base course 75 mm thick(Wearing course) and Surfacing Course (sealing coat) with loose hand broken metal of size 63mm and graded down to 45mm rolled dry to proper compaction, grade and camber and wet rolling after placing bindage of loamy earth and finally sealing the compacted surface with a 25mm thick layer of sand shingles (Ref. to MoRTH Spec.404) and as directed as applied over new consolidated surface. (Road roller supplied by contractor). | M2 | 1531.80 | 135.86 | 208110.35 |
| 6 | Providing and applying primer coat with bitumen emulsion on prepared surface of granular Base including clearing of road surface and spraying primer at the rate of 0.60 kg/sqm using mechanical means including supply of bitumen emulsion by Contractor of approved quality. | M2 | 543.38 | 25.56 | 13888.79 |
| 7 | Providing and applying tack coat with bitumen emulsion/bitumen using emulsion pressure distributor at the rate of 0.20 kg per sqm on the prepared bituminous/granular surface cleaned with mechanical broom including supply of bitumen emulsion/bitumen by Contractor of approved quality. | M2 | 543.38 | 12.26 | 6661.84 |

| SL. NO. | DESCRIPTION OF SERVICE | UOM | QUANTITY | UNIT PRICE | TOTAL |
|---|---|---|---|---|---|
| 8 | Providing and laying Bituminous concrete using crushed stone aggregates of specified grading, premixed with bituminous binder and filler, transporting the hot mix to work site by tippers, laying with paver finisher equipped with electronic sensor to the required grade, level and alignment and rolling with smooth wheeled, vibratory and tandem rollers to achieve the desired compaction and density as per specification, complete and as per directions of Engineer-in-Charge.40/50 mm compacted thickness with bitumen of grade VG-30 @ 5.5% (percentage by weight of total mix) and lime filler @ 3% (percentage by weight of Aggregate)prepared in Batch Type Hot Mix Plant of 100120 TPH capacity. | M2 | 543.38 | 429.26 | 233251.30 |
| 9 | Forest Royalty of 3% for Group A. Additional 10% Cess on forest royalties for each of MMDRRF and DMFT. | EA | 1.00 | 80878.06 | 80878.06 |
| | SECTION B | | | | |
| 1 | Supply of Gravel (65mm graded down to 25mm), hard, clean and free from foreign materials | M3 | 134.03 | 1866.43 | 250157.61 |
| 2 | Supply of Hand broken hard stone metal from river boulder fairly cubical in shape, free from dust/dirt disintegrated pieces, organic and other foreign matters (63mm to 45mm graded) | M3 | 153.18 | 2557.81 | 391805.34 |
| 3 | Supply of Stone crusher dust finer than 3mm with not more than 10%passing 0.075 sieve. | M3 | 38.30 | 1484.38 | 56851.75 |
| | GROUP B | | | | |
| | SECTION A | | | | |
| 1 | Surface dressing of the ground including removing vegetation and in-equalities not exceeding 15 cm deep and disposal of rubbish, lead upto 50 m and lift upto 1.5 m. All kinds of soil | M2 | 1400.00 | 19.77 | 27678.00 |
| 2 | Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom, backfilling the excavation earth to the extent required and utilising the remaining earth locally for roadwork.) for Ordinary Soil by Manual Means (Depth upto 3 m) | M3 | 294.45 | 507.72 | 149498.15 |
| 3 | Laying in position cement concrete of specified grade excluding the cost of centring and shuttering - All work upto plinth level: 1:3:6 (1Cement: 3 coarse sand : 6 graded stone aggregate 20 mm nominal size) | M3 | 34.72 | 1703.63 | 59150.03 |
| 4 | Laying in position specified grade of reinforced cement concrete excluding the cost of centring, shuttering, finishing and reinforcement- All work upto plinth level: 1:1.5:3 (1 cement: 1.5 coarse sand : 3graded stone aggregate 20 mm nominal size) | M3 | 70.94 | 2126.36 | 150843.98 |
| 5 | Reinforced cement concrete work in walls (any thickness), including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts etc. upto floor five level excluding cost of centring, shuttering, finishing and reinforcement: 1:1.5:3 (1 cement: 1.5 coarse sand: 3 graded stone aggregate 20 mm nominal size) | M3 | 56.39 | 3436.70 | 193795.51 |
| 6 | Centring and shuttering including strutting, propping etc. and removal of form for: Foundations, footings, bases of columns, etc. for mass concrete. | M2 | 345.49 | 186.89 | 64568.63 |

| SL. NO. | DESCRIPTION OF SERVICE | UOM | QUANTITY | UNIT PRICE | TOTAL |
|---|---|---|---|---|---|
| 7 | Centring and shuttering including strutting, propping etc. and removal of form for: Columns, Pillars, Piers, Abutments, Posts and Struts. | M2 | 648.06 | 543.66 | 352324.30 |
| 8 | Providing and Fixing Reinforcement for RCC work including straightening, cutting, bending, placing in position complete. - Upto plinth level Thermo-Mechanically Treated bars of Grade Fe-500 D or more. | KG | 16585.03 | 83.67 | 1387669.46 |
| 9 | 12mm cement plaster of mix: 1:4 (1 cement: 4 fine sand) | M2 | 894.60 | 175.07 | 156617.62 |
| 10 | Brick work with F.P.S. bricks of class designation 75 in foundation and plinth in: Cement mortar 1:4 (1 cement : 4 coarse sand) | M3 | 52.58 | 1694.26 | 89084.19 |
| 11 | Brick work with F.P.S. bricks of class designation 75 in superstructure above plinth level up to floor V level in all shapes and sizes in : Cement mortar 1:4 (1 cement : 4 coarse sand) | M3 | 180.04 | 2870.77 | 516853.43 |
| 12 | 6mm cement plaster of mix: 1:3 (1 cement: 3 fine sand) | M2 | 290.30 | 161.48 | 46877.64 |
| 13 | 15mm cement plaster on the rough side of single or half brick wall of mix :1:4 (1 cement : 4 fine sand) | M2 | 894.60 | 199.77 | 178714.24 |
| 14 | Painting with synthetic enamel paint of approved brand and manufacture to give an Even Shade | M2 | 149.00 | 100.57 | 14984.93 |
| 15 | Steel work welded in built up section / framed work including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required. 10.25.2 Integrating, frames, guard bar, ladder, railings, bracket gates and similar works. In grating, frames, guard bar, railing, brackets, gates. | KG | 6247.40 | 126.09 | 787734.67 |
| 16 | Providing and fixing concertina coil fencing with punched tape concertina coil 600 mm dia 10 metre openable length ( total length 90m), having 50 nos. rounds per 6 metre length, upto 3 m height of wall with existing angle iron 'Y' shaped placed 2.4 m or 3.00 m apart and with 9 horizontal R.B.T. reinforced barbed wire, stud tied with G.I. staples and G.I. clips to retain horizontal, including necessary bolts or G.I. barbed wire tied to angle iron, all complete as per direction of Engineer-in-charge, with reinforced barbed tape(R.B.T.) / Spring core(2.5mm thick) wire of high tensile strength of 165 kg/ sq.mm with tape (0.52 mm thick) and weight 43.478 gm/ metre (cost of M.S. angle, C.C. blocks shall be paid separately) | M | 280.00 | 291.39 | 81589.20 |
| 17 | Finishing walls with water proofing cement paint of required shade New work (Two or more coats applied @ 3.84 kg/10 sqm). | M2 | 2369.81 | 76.33 | 180887.60 |
| 18 | Collecting / excavating sand, soil, silt, ordinary earth from any source, load into lorries, transport it to distant place of work including procuring earth and laying in layer of 150mm thickness and compacting, profile properly made for taking measurement, including all measurable lead upto 30m and lift as required. (The contractor shall be responsible for all formalities of supply of earth such as purchase of land including royalties, monopoly / other statutory taxes as required from any distance.) | M3 | 504.00 | 473.89 | 238840.56 |
| 19 | Forest Royalty of 2% for Group B. Additional 10% Cess on forest royalties for each of MMDRRF and DMFT. | EA | 1.00 | 180852.32 | 180852.32 |
| | SECTION B | | | | |
| 1 | Supply of Local bricks- First Class | NO | 107005.00 | 16.97 | 1815874.85 |

| SL. NO. | DESCRIPTION OF SERVICE | UOM | QUANTITY | UNIT PRICE | TOTAL |
|---|---|---|---|---|---|
| 2 | Supply of Broken stone-Boulder broken (25mm graded down to 12mm), hard and clean. | M3 | 138.08 | 2976.88 | 411047.59 |
| 3 | Supply of Timber for shuttering | DM3 | 8197.00 | 28.16 | 230827.52 |
| 4 | Supply of Sand for general use with normal moisture content to be clean and free from clay rubbish | M3 | 187.87 | 1349.83 | 253592.56 |
| | SECTION C | | | | |
| 1 | Carriage of material by mechanical transport including loading unloading and stacking: Cement, stone blocks, G.I., C.I., A.C. & C.C. pipes below 100 mm dia and other heavy materials : Beyond 4KM and Upto5KM | TON | 91.13 | 158.88 | 14478.73 |
| 2 | Extra on Carriage of material by mechanical transport including loading unloading and stacking: Cement, stone blocks, G.I., C.I., A.C. & C.C. pipes below 100 mm dia and other heavy materials on every additional KM: Beyond 5KM and Upto 10KM | TPM | 455.67 | 12.32 | 5613.85 |
| 3 | Extra on Extra on Carriage of material by mechanical transport including loading unloading and stacking: Cement, stone blocks, G.I., C.I., A.C. & C.C. pipes below 100 mm dia and other heavy materials on every additional KM: Beyond 10KM and Upto 20KM | TPM | 911.35 | 10.27 | 9359.56 |
| 4 | Carriage of material by manual labour including loading, unloading ands tacking for first 50 m: Bricks | EA | 107005.00 | 0.30 | 32101.50 |
| 5 | Extra on Extra on Carriage of material by mechanical transport including loading unloading and stacking: Cement, stone blocks, G.I., C.I., A.C. & C.C. pipes below 100 mm dia and other heavy materials on every additional KM: Beyond 20KM | TPM | 1367.02 | 8.64 | 11811.05 |
| 6 | Carriage of material by manual labour including loading, unloading and stacking for first 50 m: Sand. Stone aggregates below 40 mm nominal size | M3 | 325.96 | 158.77 | 51752.67 |
| 7 | Extra on Carriage of material by manual labour including loading, unloading and stacking for every additional lead of 50m or part thereof beyond 1st 50m upto 9 such additional leads (Rate: cum/lead) | M3 | 325.96 | 34.57 | 11268.44 |
| 8 | Extra on Carriage of material by manual labour including loading, unloading and stacking for every additional lead of 50m or part thereof beyond 1st 50m upto 9 such additional leads (Rate:1000 Nos/lead) | EA | 107005.00 | 0.06 | 6420.30 |
| 9 | Carriage of material by manual labour including loading, unloading and stacking for first 50 m: Timber | M3 | 24.84 | 126.96 | 3153.69 |
| 10 | Extra on Carriage of material by manual labour including loading, unloading and stacking for every additional lead of 50m or part thereof beyond 1st 50m upto 9 such additional leads (Rate : cum/Lead) | M3 | 24.84 | 18.63 | 462.77 |
| | GROUP C | | | | |
| | SECTION A | | | | |
| 1 | Surface dressing of the ground including removing vegetation and in-equalities not exceeding 15 cm deep and disposal of rubbish, lead upto 50 m and lift upto 1.5 m. All kinds of soil. | M2 | 400.00 | 19.77 | 7908.00 |
| 2 | Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom, backfilling the excavation earth to the extent required and utilising | M3 | 26.67 | 507.72 | 13540.89 |

| SL. NO. | DESCRIPTION OF SERVICE | UOM | QUANTITY | UNIT PRICE | TOTAL |
|---|---|---|---|---|---|
| | the remaining earth locally for roadwork.) for Ordinary Soil by Manual Means (Depth upto 3 m) | | | | |
| 3 | Collecting / excavating sand, soil, silt, ordinary earth from any source, load into lorries, transport it to distant place of work including procuring earth and laying in layer of 150mm thickness and compacting, profile properly made for taking measurement, including all measurable lead upto 30m and lift as required. (The contractor shall be responsible for all formalities of supply of earth such as purchase of land including royalties, monopoly / other statutory taxes as required from any distance.) | M3 | 38.36 | 473.89 | 18178.42 |
| 4 | Laying damp-proof course 40mm thick with cement concrete 1:2:4 (1cement: 2 coarse sand: 4 graded stone aggregate 12.5mm nominal size). | M2 | 13.52 | 131.19 | 1773.69 |
| 5 | Laying Brick Flat Soling (75mm thick) including grading the base and spreading 25mm thick sand bed at bottom and grouting soling with cement mortar (prop. 1:3) and carrying all materials from a distance of upto 30.00m. | M2 | 60.12 | 179.98 | 10820.40 |
| 6 | Laying in position cement concrete of specified grade excluding the cost of centring and shuttering - All work upto plinth level: 1:3:6 ( 1Cement: 3 coarse sand : 6 graded stone aggregate 20 mm nominal size) | M3 | 8.88 | 1703.63 | 15128.23 |
| 7 | Laying in position specified grade of reinforced cement concrete excluding the cost of centring, shuttering, finishing and reinforcement- All work upto plinth level : 1:1.5:3 (1 cement: 1.5 coarse sand : 3graded stone aggregate 20 mm nominal size) | M3 | 7.00 | 2126.36 | 14884.52 |
| 8 | Reinforced cement concrete work in walls (any thickness), including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts etc. upto floor five level excluding cost of centring, shuttering, finishing and reinforcement: 1:1.5:3 (1 cement: 1.5 coarse sand: 3 graded stone aggregate 20 mm nominal size) | M3 | 8.00 | 3436.70 | 27493.60 |
| 9 | Reinforced cement concrete work in beams, suspended floors, roof shaving slope upto 15° landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases upto floor five level excluding the cost of centring, shuttering, finishing and reinforcement with 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size). | M3 | 14.00 | 3790.68 | 53069.52 |
| 10 | Centring and shuttering including strutting, propping etc. and removal of form for : Foundations, footings, bases of columns, etc. for mass concrete. | M2 | 32.54 | 186.89 | 6081.40 |
| 11 | Centring and shuttering including strutting, propping etc. and removal of form for: Suspended floors, roofs, landings, balconies and access platform. | M2 | 130.00 | 525.31 | 68290.30 |
| 12 | Centring and shuttering including strutting, propping etc. and removal of form for: Lintels, beams, plinth beams, girders, bressumers and cantilevers. | M2 | 70.00 | 400.50 | 28035.00 |
| 13 | Centring and shuttering including strutting, propping etc. and removal of form for: Columns, Pillars, Piers, Abutments, Posts and Struts. | M2 | 44.32 | 543.66 | 24095.01 |
| 14 | Providing and Fixing Reinforcement for RCC work including straightening, cutting, bending, placing in position complete. - Upto plinth level Thermo-Mechanically Treated bars of Grade Fe-500 D or more. | KG | 4000.00 | 83.67 | 334680.00 |

| SL. NO. | DESCRIPTION OF SERVICE | UOM | QUANTITY | UNIT PRICE | TOTAL |
|---|---|---|---|---|---|
| 15 | Supplying and applying pre-tested and approved water based concrete curing compound to concrete/ masonry surface, all as per manufacturer's specification and direction of Engineer-in-charge. Pigmented wet curing compound | M2 | 50.00 | 160.18 | 8009.00 |
| 16 | Brick work with F.P.S. bricks of class designation 75 in foundation and plinth in: Cement mortar 1:4 (1 cement : 4 coarse sand) | M3 | 28.71 | 1694.26 | 48642.20 |
| 17 | Brick work with F.P.S. bricks of class designation 75 in superstructure above plinth level up to floor V level in all shapes and sizes in : Cement mortar 1:4 (1 cement : 4 coarse sand) | M3 | 21.00 | 2870.77 | 60286.17 |
| 18 | Wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position : Kiln seasoned and chemically treated Hollock wood. | M3 | 0.35 | 17446.39 | 6106.24 |
| 19 | Fixing ISI marked flush door shutters conforming to IS : 2202 (Part I)decorative type, core of block board construction with frame of 1st class hard wood and well matched teak 3 ply veneering with vertical grains or cross bands and face veneers on both faces of shutters.35mmthick including ISI marked Stainless Steel butt hinges with necessary screws. | M2 | 12.30 | 382.23 | 4701.43 |
| 20 | Fixing IS : 12817 marked stainless steel butt hinges with stainless steel screws etc. complete: 125x64x1.90mm | EA | 28.00 | 16.10 | 450.80 |
| 21 | Fixing bright finished brass 100mm mortice latch and lock with 6 levers and a pair of lever handles with necessary screws etc. complete (best make of approved quality). | EA | 7.00 | 154.53 | 1081.71 |
| 22 | Fixing bright finished brass hanging type floor door stopper with necessary screws, etc. complete. | EA | 7.00 | 3.28 | 22.96 |
| 23 | Fixing IS : 3564 marked Aluminium die cast body tubular type universal hydraulic door closer with necessary accessories and screws etc. complete. | EA | 7.00 | 71.81 | 502.67 |
| 24 | Fixing unplasticised -PVC pipe clips of approved design to unplasticised - PVC rain water pipes by means of 50x50x50mm hard wood plugs, screwed with M.S. screws of required length including cutting brick work and fixing in cement mortar 1:4(1 cement: 4 coarse sand) and making good the wall etc. complete.110 mm | EA | 24.00 | 195.83 | 4699.92 |
| 25 | Laying Vitrified tiles in different sizes (thickness to be specified by manufacturer), with water absorption less than 0.08 % and conforming to I.S. 15622, of approved make, in all colours & shade, in skirting, riser of steps, over 12 mm thick bed of cement mortar 1:3 (1cement: 3 coarse sand), including grouting the joint with white cement & matching pigments etc. complete. Size of Tile 600x600 mm | M2 | 106.63 | 470.26 | 50143.82 |
| 26 | Fixing on wall face unplasticised Rigid PVC rainwater pipes conforming to IS: 13592 Type A including jointing with seal ring conforming to IS:5382 leaving 10 mm gap for thermal expansion, (i) Single socketedpipes-110 mm dia | M | 24.00 | 110.57 | 2653.68 |
| 27 | Fixing on wall face unplasticised - PVC moulded fittings/ accessories for unplasticised Rigid PVC rain water pipes conforming to IS: 13592Type A including jointing with seal ring conforming to IS: 5382 leaving10 mm gap for thermal expansion.-Bend 87.5°-110 mm Bend | EA | 12.00 | 35.65 | 427.80 |

| SL. NO. | DESCRIPTION OF SERVICE | UOM | QUANTITY | UNIT PRICE | TOTAL |
|---|---|---|---|---|---|
| 28 | 12mm cement plaster of mix: 1:4 (1 cement : 4 coarse sand) | M2 | 354.506 | 175.07 | 62063.37 |
| 29 | 6mm cement plaster of mix: 1:3 (1 cement : 3 fine sand) | M2 | 136.68 | 161.48 | 22071.09 |
| 30 | Applying one coat of cement primer of approved brand and manufacture on wall surface: Cement primer | M2 | 305.85 | 44.48 | 13604.21 |
| 31 | Finishing walls with Acrylic Smooth exterior paint of required shade: New work (Two or more coat applied @ 1.67 ltr/10 sqm over and including base coat of water proofing cement paint applied @ 2.20 kg/10 sqm). | M2 | 96.31 | 68.66 | 6612.64 |
| 32 | Fixing wash basin with C.I. brackets, 15mm C.P. brass pillar taps,32mmC.P. brass waste of standard pattern, including painting of fittings and brackets, cutting and making good the walls wherever require: White Vitreous China Wash basin size 630x450mm with a pair of 15mm C. P. brass pillar taps. | EA | 2.00 | 1153.31 | 2306.62 |
| 33 | Application of white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete | M2 | 330.00 | 77.22 | 25482.60 |
| 34 | Wall painting with acrylic emulsion paint, having VOC (Volatile Organic Compound) content less than 50 grams/ litre, of approved brand and manufacture, including applying additional coats wherever required, to achieve even shade and colour: Two Coats | M2 | 310.00 | 77.79 | 24114.90 |
| 35 | Fixing white vitreous china pedestal type water closet (European type W.C. pan) with seat and lid, 10 litre low level white P.V.C. flushing cistern with manually controlled device (handle lever), conforming to IS: 7231, with all fittings and fixtures complete including cutting and making good the walls and floors wherever required: W.C. pan with ISI marked white solid plastic seat and lid. | EA | 2.00 | 2240.17 | 4480.34 |
| 36 | Fixing Stainless Steel A ISI 304 (18/8) kitchen sink as per IS 13983with C.I. brackets and stainless steel plug 40mm including painting of fittings and brackets, cutting and making good the walls wherever required: Kitchen sink with drain board :510x1040mm bowl depth 250mm. | EA | 1.00 | 1374.15 | 1374.15 |
| 37 | Fixing white vitreous china flat back or wall corner type lipped front urinal basin of 430x260x350mm and 340x410x265mm sizes respectively. | EA | 2.00 | 579.38 | 1158.76 |
| 38 | Fixing mirror of superior glass (of approved quality) and of required shape and size with plastic moulded frame of approved make and shade with 6mm thick hard board backing: Rectangular shape 453x357mm | EA | 2.00 | 448.63 | 897.26 |
| 39 | Fixing toilet paper holder: C.P. brass | EA | 2.00 | 199.48 | 398.96 |
| 40 | Fixing PTMT towel rail complete with brackets fixed to wooden cleats with CP brass screws with concealed fitting arrangement of approved quality and colour. 450mm long towel rail with total length of 495mm,78mm wide and effective height of 88mm, weighing not less than 170gms. | EA | 2.00 | 264.87 | 529.74 |
| 41 | Fixing G.I. pipes complete with G.I. fittings including trenching and refilling etc. :15mm dia. nominal bore | M | 24.40 | 97.96 | 2390.22 |
| 42 | Fixing G.I. Union in G.I. pipe including cutting and threading the pipe and making long screws etc. complete (New work) 15mm nominal bore. | EA | 5.00 | 165.27 | 826.35 |
| 43 | Fixing G.I. Union in G.I. pipe including cutting and | EA | 5.00 | 165.27 | 826.35 |

| SL. NO. | DESCRIPTION OF SERVICE | UOM | QUANTITY | UNIT PRICE | TOTAL |
|---|---|---|---|---|---|
| | threading the pipe and making long screws etc. complete (New work) 20mm nominal bore | | | | |
| 44 | Fixing C.P. brass bib cock of approved quality conforming toIS:893115mm nominal bore. | EA | 2.00 | 30.50 | 61.00 |
| 45 | Fixing G.I. pipes complete with G.I. fittings including trenching and refilling etc. :20mm dia. nominal bore | M | 24.40 | 97.96 | 2390.22 |
| 46 | Fixing C.P. brass stop cock (concealed) of standard design and of approved make conforming to IS:8931.15mm nominal bore. | EA | 2.00 | 30.50 | 61.00 |
| 47 | Providing and fixing C.P. brass angle valve for basin mixer and geyser points of approved quality conforming to IS:893 115mm nominal bore | EA | 2.00 | 29.82 | 59.64 |
| 48 | Fixing PTMT Soap Dish Holder having length of 138mm, breadth 102mm, height of 75mm with concealed fitting arrangements, weighing not less than 106 gms. | EA | 2.00 | 17.83 | 35.66 |
| 49 | Fixing bright finished brass tower bolts (barrel type) with necessary screws etc. complete: 250x10mm | EA | 30.00 | 9.73 | 291.90 |
| 50 | Fixing bright finished brass handles with screws etc. complete: 125mm | EA | 30.00 | 5.84 | 175.20 |
| 51 | Painting with synthetic enamel paint of approved brand and manufacture to give an even shade: Two or more coats on new work | M2 | 32.96 | 76.69 | 2527.70 |
| 52 | Varnishing with varnish of approved brand and manufacture: Two or more coats of glue sizing with copal varnish over an under coat of flatting varnish. | M2 | 22.47 | 123.79 | 2781.56 |
| 53 | Steel work welded in built up section / framed work including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required. In grating, frames, guard bar, ladder, railings, brackets, gates and similar works. | KG | 700.00 | 126.09 | 88263.00 |
| 54 | Supplying chemical emulsion in sealed containers including delivery as specified. Chlorpyriphos/ Lindane emulsifiable concentrate of 20% | L | 60.00 | 191.84 | 11510.40 |
| 55 | Treatment of soil under existing floors using chemical emulsion @ one litre per hole, 300 mm apart including drilling 12 mm diameter holes and plugging with cement mortar 1 :2 (1 cement : 2 Coarse sand) to match the existing floor ,With Chlorpyriphos/Lindane E.C. 20% with 1% concentration | M2 | 100.00 | 184.61 | 18461.00 |
| 56 | Fixing glass panes with putty and glazing clips in steel doors, windows, clerestory windows all complete with 4.0 mm thick glass panes | M2 | 10.49 | 428.02 | 4489.93 |
| 57 | 15mm cement plaster on rough side of single or half brick wall finished with a floating coat of neat cement of mix :1:4 (1 cement : 4 fine sand) | M2 | 33.20 | 239.34 | 7946.09 |
| 58 | Laying water proofing treatment on roofs of slabs by applying cement slurry mixed with water proofing cement compound consisting of applying :a) after surface preparation, first layer of slurry of cement @ 0.488kg/sqm mixed with water proofing cement compound @ 0.253 kg/sqm. b) laying second layer of fiber glass cloth when the first layer is still green. Overlaps of joints of fiber cloth should not be less than 10cm.c) third layer of 1.5mm thickness consisting of slurry of cement @ 1.289kg/sqm mixed with water proofing cement compound @ 0.670 kg/sqm and coarse sand @ 1.289 kg/sqm. This will be allowed to air cure for 4 hours followed by water curing for 48 hours. The entire treatment will be | M2 | 20.00 | 240.62 | 4812.40 |

| SL. NO. | DESCRIPTION OF SERVICE | UOM | QUANTITY | UNIT PRICE | TOTAL |
|---|---|---|---|---|---|
| | taken upto 30cm on parapet wall and tucked into groove in parapet all around. d) fourth and final layer of brick tiling with cement mortar (which will be paid for separately. For the purpose of measurement, the entire treated surface will be measured). | | | | |
| 59 | :Fixing at all height false ceiling including providing and fixing of frame work made of special sections power pressed from M.S. sheet and galvanised in accordance with zinc coating of grade 350 as per IS : 277and consisting of angle cleats of size 25mm wide x 1.6mm thick with flanges of 22mm and 37mm at 1200mm centre to centre one flange fixed to the ceiling with dash fastener 12.5mm diax40mm long with 6mm dia bolts to the angle hangers of 25x25x0.55mm of required length, and other end of angle hanger being fixed with nut and bolts to G.I. channels45x15x0.9mm running at the rate of 1200mm centre to centre to which the ceiling section 0.5mm thick bottom wedge of 80mm with tapered flanges of26mm each having clips of 10.5mm at 450mm centre to centre shall be fixed in a direction perpendicular to G.I. channel with connecting clips made out of 2.64mm diax230mm long G.I. wire at every junction including fixing the gypsum board with ceiling section and perimeter channels0.5mm thick 27mm high having flanges of 20mm and 30mm long, the perimeter of ceiling fixed to wall/partition with the help of rawl plugs at 450mm centre to centre with 25mm long drive-all screws @ 230mminterval including jointing and fixing to a flush finish of tapered and square edges of the board with recommended filler, jointing tapes, finisher and two coats of primer suitable for board as per manufactures specification. | M2 | 36.80 | 497.20 | 18296.96 |
| 60 | Applying 10mm thick plaster of Paris (gypsum anhydrous) ceiling up to a height of 5 m above floor level over first class kail wood strips 25x6mmwith 10mm gap in between and reinforced with rabbit wire mesh fixed to wooden frame (frame work to be paid separately) : Flat surfaces | M2 | 20.00 | 779.93 | 15598.60 |
| 61 | Fixing tiled false ceiling of approved materials of size 595x595 mm in true horizontal level, suspended on inter locking metal grid of hot dipped galvanized steel sections ( galvanized @ 120 grams/ sqm, both side inclusive) consisting of main "T" runner with suitably spaced joints to get required length and of size 24x38 mm made from 0.30mm thick (minimum) sheet, spaced at 1200 mm center to center and cross "T" of size 24x25 mm made of 0.30 mm thick (minimum) sheet, 1200 mm long spaced between main "T" at 600 mm center to center to form a grid of1200x600 mm and secondary cross "T" of length 600 mm and size 24x25 mm made of 0.30 mm thick (minimum) sheet to be interlocked at middle of the1200x600 mm panel to form grids of 600x600 mm and wall angle of size24x24x0.3 mm and laying false ceiling tiles of approved texture in the grid including, required cutting/making, opening for services like diffusers, grills, light fittings, fixtures, smoke detectors etc. Main "T" runners to be suspended from ceiling using GI slotted cleats of size27 x 37 x 25 x1.6 mm fixed to ceiling with 12.5 mm dia and 50 mm long dash fasteners, 4 mm GI adjustable rods with galvanised butterfly level clips of size 85 x 30 x 0.8mm spaced at | M2 | 4.00 | 385.47 | 1541.88 |

| SL. NO. | DESCRIPTION OF SERVICE | UOM | QUANTITY | UNIT PRICE | TOTAL |
|---|---|---|---|---|---|
| | 1200 mm center to center along main T, bottom exposed width of 24 mm of all T-sections shall be pre-painted with polyester paint, all complete for all heights as per specifications, drawing | | | | |
| 62 | Grading roof for water proofing treatment with Cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20mm nominal size) | M3 | 4.00 | 1833.55 | 7334.20 |
| 63 | Trowel finishing concrete surface. | M2 | 40.00 | 91.08 | 3643.20 |
| 64 | Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections /appropriate Z sections and other sections of approved make conforming to IS: 733 and IS: 1285, fixed with rawl plugs and screws or with fixing clips, or with expansion hold fasteners including necessary filling up of gaps at junctions, at top, bottom and sides with required PVC/neoprene felt etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, aluminium snap beading for glazing / panelling, C.P. brass/ stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-Charge. (Glazing and panelling to be paid for separately): For fixed portion with Anodised aluminium (anodised transparent or dyed to required shade according to IS: 1868, Minimum anodic coating of grade AC 15) | KG | 120.00 | 382.23 | 45867.60 |
| 65 | Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections /appropriate Z sections and other sections of approved make conforming to IS: 733 and IS: 1285, fixed with rawl plugs and screws or with fixing clips, or with expansion hold fasteners including necessary filling up of gaps at junctions, at top, bottom and sides with required PVC/neoprene felt etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, aluminium snap beading for glazing / panelling, C.P. brass/ stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-Charge. (Glazing and panelling to be paid for separately): For shutters of doors, windows & ventilators including providing and fixing hinges / pivots and making provision for fixing of fittings wherever required including the cost of PVC / neoprene gasket required (Fittings shall be paid for separately). with Anodised aluminium(anodised transparent or dyed to required shade according to IS: 1868,Minimum anodic coating of grade AC 15) | KG | 80.00 | 458.54 | 36683.20 |
| 66 | Forest Royalty of 2% for Group C. Additional 10% Cess on forest royalties for each of MMDRRF and DMFT. | EA | 1.00 | 54880.55 | 54880.55 |
| | SECTION B | | | | |
| 1 | Supply of Local bricks- First Class | NO | 22867.00 | 16.97 | 388052.99 |
| 2 | Supply of Broken stone-Boulder broken (25mm graded down to 12mm), hard and clean. | M3 | 30.00 | 2976.88 | 89306.40 |
| 3 | Supply of Broken stone (Boulder broken)(6mm graded down to 2mm), hard and clean . | M3 | 3.56 | 2021.10 | 7195.12 |
| 4 | Supply of Timber for shuttering | DM3 | 6922.00 | 28.16 | 194923.52 |

| SL. NO. | DESCRIPTION OF SERVICE | UOM | QUANTITY | UNIT PRICE | TOTAL |
|---|---|---|---|---|---|
| 5 | Block board construction flush door with teak wood ply on both faces 35mm thick | M2 | 12.30 | 2139.00 | 26309.70 |
| 6 | Supply of Timber Ist class (Tita chapa), free from knots and weak spots. | DM3 | 350.00 | 87.43 | 30600.50 |
| 7 | Supply of Sand for general use with normal moisture content to be clean and free from clay rubbish | M3 | 80.00 | 1349.83 | 107986.40 |
| 8 | Brass mortice latch and lock 100x65 mm with6 levers and a pair of brass lever handles | EA | 7.00 | 506.00 | 3542.00 |
| 9 | G.I. pipes 15 mm dia | M | 24.40 | 123.05 | 3002.42 |
| 10 | G.I. pipes 20 mm dia | M | 24.40 | 159.85 | 3900.34 |
| 11 | Vitreous china flat back wash basin 630x450 mm | EA | 2.00 | 917.70 | 1835.40 |
| 12 | Vitreous china pedestal type water closet | EA | 2.00 | 1242.00 | 2484.00 |
| 13 | Float glass sheet of nominal thickness 4 mm (weight not less than10kg/sqm). | M2 | 10.49 | 369.15 | 3872.38 |
| 14 | Brass hanging type door stopper 150 mm | EA | 7.00 | 92.00 | 644.00 |
| 15 | Hydraulic door closer bottle type M.S. body with necessary accessories and screws complete | EA | 7.00 | 803.85 | 5626.95 |
| 16 | Stainless steel kitchen sink - with drain board bowl depth 250 mm. | EA | 1.00 | 3680.00 | 3680.00 |
| 17 | Rectangular shape 453x357 mm Mirror with Plastic moulded frame | EA | 2.00 | 353.05 | 706.10 |
| 18 | U-PVC pipes (working pressure 4 kg / cm 2 ) Single socketed pipe 110 mm dia. | M | 24.00 | 163.30 | 3919.20 |
| 19 | UPVC bend 87.5o 110 mm bend | EA | 12.00 | 72.45 | 869.40 |
| 20 | UPVC pipe clip 110 mm bend | EA | 24.00 | 18.40 | 441.60 |
| 21 | Prefix #PTMT# - Towel Rail (450MM) | EA | 2.00 | 151.80 | 303.60 |
| 22 | Stainless steel butt hinges 125x64x1.9 mm IS : 12817 marked | NO | 28.00 | 44.62 | 1249.36 |
| 23 | Acrylic exterior paint | L | 16.08 | 195.50 | 3143.64 |
| 24 | Cement base wall care putty | KG | 445.93 | 20.70 | 9230.75 |
| 25 | Vitrified floor tile 60x60 cm | M2 | 106.63 | 632.50 | 67443.48 |
| 26 | Acrylic emulsion, having VOC content less than 50 gm/litre | L | 25.69 | 120.75 | 3102.07 |
| 27 | Water thinnable cement primer for interior wall surface, having VOC content less than 50 g | L | 21.41 | 46.00 | 984.86 |
| 28 | Structural steel such as tees, angles channels and R.S. joists | QTL | 6.05 | 6859.75 | 41501.49 |
| 29 | Water repellent chemical approved by ASI | L | 10.00 | 1368.50 | 13685.00 |
| 30 | Tile fixing chemical adhesive | KG | 50.00 | 13.80 | 690.00 |
| | SECTION C | | | | |
| 1 | Carriage of material by mechanical transport including loading unloading and stacking: Cement, stone blocks, G.I., C.I., A.C. & C.C. pipes below 100 mm dia and other heavy materials : Beyond 4KM and Upto 5KM | TON | 30.00 | 158.88 | 4766.40 |
| 2 | Extra on Carriage of material by mechanical transport including loading unloading and stacking: Cement, stone blocks, G.I., C.I., A.C. & C.C. pipes below 100 mm dia and other heavy materials on every additional KM: Beyond 5KM and Upto 10KM | TPM | 150.00 | 12.32 | 1848.00 |

| SL. NO. | DESCRIPTION OF SERVICE | UOM | QUANTITY | UNIT PRICE | TOTAL |
|---|---|---|---|---|---|
| 3 | Extra on Carriage of material by mechanical transport including loading unloading and stacking: Cement, stone blocks, G.I., C.I., A.C. & C.C. pipes below 100 mm dia and other heavy materials on every additional KM: Beyond 10KM and Upto 20KM | TPM | 600.00 | 10.27 | 6162.00 |
| **Contract Execution Cost, A** | | **₹1,20,68,779.15** | | | |
| **Forest Royalty on the Contract Execution cost, B** | | **₹3,16,610.93** | | | |
| **TOTAL (A+B)** | | **₹1,23,85,390.08** | | | |

**Note:**

a) Bidder must quote overall price within the range of "At Par" to "+10%" of Company's Internal Estimate.

b) Bidder must include all impale plant, labour, supervision, materials, erection of display board, sign/caution board, insurance, profit, taxes and duties, together with all general risks, liabilities in their quoted rates excluding PF and GST.

c) Forest Royalty is to be calculated and paid as per the "Third Schedule" of Notification No. PEM 130/2021/40 dated 7th October 2021 & other ancillary charges as per Notification No. PEM 130/2021/55 dated 16th December 2021.

# WORKS CONTRACT

## SPECIAL CONDITIONS OF CONTRACT

**DESCRIPTION OF WORK/SERVICES:** Construction of boundary wall, approach road and operator room cum IM room by earth filling the low laying area for placement of In-house Gas compressor inside Dikom GCS.

### 1.0 GENERAL:

Brief specifications are given here under for general guidance purpose of the tenderers. The job scope includes "Construction of boundary wall, approach road and operator room cum IM room by earth filling the low laying area for placement of In-house Gas compressor inside Dikom GCS". It shall clearly be noted that the bidders are required to give their rates taking into consideration all aspects as per site requirements and specifications enclosed along with this tender document. Quoted offers shall be inclusive of all materials (except cement), labour and other taxes & lavies (except PF & GST). Water and Power shall have to be arranged by the contractor for execution of the tendered work. The contractor shall be responsible to complete the entire work in all respects and also any other works necessary to complete the job though especially not covered in the scope of work. All materials used in the work shall conform to the latest revision of the relevant Indian Standard Specifications to the extent practicable. Where no such specifications exist, they shall be of the best quality available in the market. Wherever ISI certified materials and products are available these alone shall be used. All materials shall be stored at site in accordance with IS-4082-1996.

Unless specially provided for in the contract the tendered rates shall include the cost of carriage, transport, loading, unloading and stacking as directed for all materials required on the work. Where a tender provides a rate for transport of materials, it includes for all loading, unloading and stacking on the site in such position and manner as directed. Any materials found not conforming to specification must be removed from site within 48 hours.

### 2.0 SITE CLEARANCE:

Before the earthwork is started, the area coming under cutting and/refilling shall be cleared of shrubs, vegetation, grass, uprooting of tree stumps and such others, and rubbish removed up to a distance of 50 metres outside the periphery of the area under clearance. The rate of such site clearance is included in the rate of earthwork. Necessary excavation clearance is to be obtained from concerned Installation manager before execution of excavation work.

### 3.0 STORAGE:

Materials shall be transported, handled and stored at site carefully to the approval of Engineer so as to prevent any damage of any kind to be kept at his own risk and cost.

Cement shall be stored in a weatherproof shed, the floor of which shall be raised 300 mm clear from the ground and 600 mm away from the wall all round in order to protect from rain and moisture. Empty cement bag shall be returned to the Company in good condition.

### 4.0 CEMENT CONCRETE/ REINFRCED CEMENT CONCRETE WORK:

All C.C./ RCC work shall be done in 1:2:4, 1:1.5:3 & 1:3:6 proportions wherever necessary as per the direction of Engineer-in-Charge and shall be done with 25 mm graded down 12mm retain broken stone. Broken stone shall be properly screened before use. All reinforced cement concrete work to be done in prop. 1:1.5:3 unless otherwise specified -25mm down to 12mm graded down broken stone as per related drawings and instructions of site Engineer to be followed in case of any discrepancies. Proper vibration to be done as per IS recommendation. Floor panelling to be done in the line of expansion joint as directed by Engineer In-charge.

**Fine Aggregate** - Fine aggregate shall be hard, durable, clean and free from adherent coating and organic matter. It shall not contain harmful impurities such as pyrites, coal, lignite, mica, shale or similar laminated material, clay, alkali, soft fragments, seashells and organic impurities in such quality as to affect the strength or durability of the concrete. Fine aggregate to be used for reinforced concrete shall not contain any material liable

to attack the steel reinforcement. Fine aggregate which is chemically reactive with alkalis of cement is harmful as cracking of concrete may take place.

**Coarse Aggregate** - Coarse aggregate shall be obtained from natural sources such as stone, gravel, etc. crushed or un-crushed or a continuation thereof from approved quarries. This shall consist of coarse material most of which is retained on 4.75mm sieve. Aggregate shall be hard, strong, dense, durable, clean and free from veins and adherent coatings. It shall be free from soft, feeble, thin, elongated or laminated pieces and shall be roughly cubical in shape. It shall be clear and free from dirt and any other deleterious matter.

**Reinforcement bars** - The following types of steel for reinforcement shall be used in reinforced concrete construction and these shall conform to Indian Standards or as revised from time to time mentioned against each.

a) Mild steel and medium tensile steel bars and hard drawn steel wire – IS: 432.

b) Fe-500 D bars.

**Bending & Placing steel reinforcement in position**-Bending shall be carried out as per relevant IS specification and direction of the Engineer-in-charge. All reinforcement bars shall be accurately placed in position with spacing and cover as shown in the drawing or as specified and firmly held so during the placing and vibrating and setting of concrete. Bars shall be thoroughly cleared of rust, seals, grease, oil and any other foreign matter before placing them in position. The overlap jointing shall be staggered. The bars shall be fixed with 22G binding wire. Precast cover blocks 1:2 (1 cement: 2sand) cement mortar 40 mm square and necessary thickness shall be used to keep the reinforcement bars in proper position. For this block, no extra payment to be made. Wire required for binding shall not be measured separately. Tack welding shall also be permitted in lieu of building with steel wire.

**Proportioning of mix** - Proportioning shall be done by volume. Boxes of suitable size shall be used for measuring sand and aggregates. The size of the boxes (internal) shall be 35 x 25cm and 40cm deep. The unit of measurement for cement, shall be a bag of cement weighting 50 Kg and this shall be taken as 0.035 cubic metre. While measuring the aggregate and sand the boxes shall be filled without shaking, ramming or hammering. The proportioning of sand shall be on the basis of its dry volume and in case of damp sand, allowances for bulkage shall be made.

**Mixing** - Mixing of reinforced cement concrete shall, as a rule be done in a mechanical mixer. However, the Engineer-in-charge may permit hand mixing in specific cases where in his opinion it is not practicable to resort to mechanical mixing, either on account of the quality of cement concrete required is small or for any other reason. In such cases, it should be ensured that the inferior quality of concrete produced by hand mixing will not adversely affect the structure.

**Consistency** - The quantity of water to be used for each batch containing 50 Kg of cement, to give the required consistency shall not be more than 34 litres for 1:3:6, mix 32 litres for 1:2:4 mix, 30 litres for 1:1.5:3 mix and 27 litres for 1:1:2 mix. In case of vibrated concrete, the above quantity shall be suitably reduced. The quantity of water shall be regulated by carrying out regular Slump Test.

**Placing of concrete** - Before placing the concrete the sub-base/form work shall be cleared of all injurious or foreign matter, watered and well consolidated. Formwork shall be clean and free from all foreign material. It is necessary that the time between mixing and placing of concrete does not exceed the initial setting process. Mixed concrete that has been left standing shall not be used after the initial set has commenced the addition of water (or cement) to make such a mixture more workable shall not be allowed. In foundation trenches or such other situations, the entire concrete used in the work shall be laid gently (not thrown) in layers not exceeding 15cm. The concrete so deposited shall be thoroughly vibrated by means of mechanical vibrators till dense concrete is obtained.

**Curing** - Concrete shall be carefully protected during first stage of hardening from harmful effects or excessive heat, drying winds, rain or running water and shock. After the concrete has begun to harden i.e. about 1 to 2 hours after its laying it shall be protected from quick drying with moist gunny bags or any other material

approved by the Engineer-in-charge. After 24 hours of laying of concrete the surface shall be cured by flooding water up to 25mm depth or by covering with wet adsorbent materials. The curing shall be done for a minimum period of 7 days from the date of pouring of concrete, unless otherwise specified.

**Finishing** - In case of roof slabs the top surface shall be finished even and smooth with wooden trowel, before the concrete beings to set. The surface of RCC slab on which the cement concrete or mosaic floor is to be laid shall be roughened with brushes while the concrete is green. This shall be done carefully without disturbing the concrete. Before laying the floor, the laitance shall be removed, the surface of slab hacked and a coat of cement slurry at 2.75 Kg of cement per square metre shall be applied, so as to get a good bond between RCC and concrete floor. The exposed surface which is to receive plaster or where it is to be joined with brick masonry wall, shall be properly roughened immediately after the removal of form work, taking care to remove the laitance completely without disturbing the concrete. Before the surface is plastered, it shall be cleaned and wetted so as to give good bond between concrete and plaster.

**5.0 BRICK WORK:**

5.1 All bricks shall be of 75 class designation quality locally available as approved by the Site Engineer.

5.2 Type of Brickwork to be used for the work shall be as per the instruction of Engineer-In-Charge.

5.3 Bricks shall be well burnt, sound, hard with sharp edges of uniform size and shape free from cracks, stones or particles of lime and other defects, shall be kiln burnt and satisfy the following requirement:

(i) They shall give a clear metallic sound when struck
(ii) They shall be of uniform colour and size
(iii) They shall not be cracked, stratified or under or over burnt
(iv) The tolerance in dimensions shall be +/- 12mm in length, 6mm in width and 3mm in height.
(v) Keys or frogs shall be formed on one of the larger size, except in the case of machine extruded bricks where no frogs are required
(vi) The increase in weight when soaked in water for 24 hours shall not be more than 20% of the dry weight of the bricks.

5.4 If required by the Site Engineer necessary test shall be conducted at the contractor's expense to ensure quality. In general, the bricks shall be the best quality locally available.

**6.0 CEMENT MORTAR:**

6.1 Cement mortar shall be of proportions specified for each type of work in the schedule. It shall be composed to Portland cement and sand. The ingredients shall be accurately gauged by measured and shall be well and evenly mixed together in a mechanical pan mixer, care being taken not to add more water than is required. No mortar that has began to set shall be used. River sand shall be used unless otherwise specified.

6.2 **Must be freshly mixed:** Cement mortar will only be mixed in such quantities as can be used up on the work within half an hour of mixing. Mortar which has been mixed longer or which has taken its initial set will on no account be used on the work or remixed with fresh mortar. It must be immediately removed from the site or work.

6.3 **Method of mixing:** The cement and sand will be mixed dry in the specified proportions, by turning over at least three times on the mixing platform. Only sufficient water will then be added, thorough a rose of a watering can, to produce a workable mixture. The wet mortar will be thoroughly worked or mixed by repeatedly turning over, not less than three times on the mixing board.

6.4 **Size of mixing platform and precaution against list:** All mixing of mortar must be done on platforms and workman bringing the material to and from the platform must not be permitted to walk about on it, thereby bringing mud or dirt to the place, where the mortar is being mixed. The platform must be clean, and level and all joints closed or filled so that the cement is not washed out.

6.5 **Proportion of cement and sand:** Where not otherwise specified, cement mortar for plaster will consist of one part of cement to three parts of sand. For mortar for brick or stone masonry work the proportion unless otherwise specified, will be one part of cement to three parts sand.

**7.0 EXCAVATION OF FOUNDATION:**

7.1 Trenches for wall foundation, column footings, raft-foundations, pile caps, plinth beams, water tanks, cess pits etc. shall be excavated to the exact length, width and depth shown or figured on the drawing or as may be directed by the Site Engineer. If taken out to greater length, width or depth than shown or required, the extra work occasioned thereby shall be done at contractors' expense. Extra depth shall be brought up by plain cement concrete filling 1:4:8 proportion and extra length and width filled in by rammed earth or if the Site Engineer thinks it necessary for the stability of the work by 1:4:8 concrete as may be directed at the contractor's cost.

7.2 Excavated materials shall be used for filling in plinth or each side of the foundation blocks or trenches or it shall be spread elsewhere on or near the site work including watering, ramming and consolidating or removed from site as may be ordered.

7.3 The contractor shall at his own expense and without extra charge, make provision for supporting all utility services, lighting the trenches, separating and stacking serviceable materials neatly, shorting, timbering, bailing out water either sub-soil or rainwater including pumping at any stage of the work. Trenches shall be kept free from water masonry of concrete works are in progress and till the concrete is sufficiently set.

**8.0 FORM WORK:**

The formwork shall be rigid and so corrected as to retain the shape and dimensions of the member being cast. Form work for concrete shall be seasoned timber/steel or other approved materials as per directions of the Engineer. It shall be sufficiently tightened to prevent loss of cement slurry and all holes and joints shall be chaulked with putty. It shall have sufficient strength and rigidity to withstand the load of concrete, and vibrations, movement of men, materials and plants and any other incidental loads without excessive deflection beyond permissible limits. The formwork shall be so constructed as to be removable in sections by inscribing or otherwise loosing – them without hammering or levering with force. Only wedges, clamps bolts or screws etc., shall be used in preference to nails or spikes. All side pieces shall be easily removable without disturbing the bottom pieces. Where however, use of nails and spikes become unavoidable, these shall be left projecting so that they can easily be withdrawn.

**Surface treatment for shuttering** - Forms shall be cleaned of all dust, wood shavings, dirt and other matter by washing with water. This process is facilitated by providing draining holes in the shuttering. The surface shall then be coated with soap solution applied before concreting is done. Soap solution for the purpose shall be prepared by dissolving yellow soap in water to get consistency of paint. Alternatively, a coat of raw linseed oil/refined pale paraffin mineral oil or form oil of approved manufacture may be applied. In case steel shuttering is used, soap solution or row linseed oil shall be applied after thoroughly cleaning the surface. Care shall be taken that such approved composition is kept out of contact with the reinforcement.

In normal circumstances (temperature not below15 degree C) and where ordinary Portland cement is used form may generally be removed after the expiry of the following periods.

a) Vertical form work to columns, walls, beams = (16-24) hours
b) Slabs side (props left under): 3 days
c) Beam soffits (props. left under):7 days
d) Removal of props under slabs
   (i) Spanning up to 4.5 m: 7 days
   (ii) Spanning over 4.5 m: 14 days
e) Removal of props under beams and arches:
   (i) Spanning up to 6 m: 14 days
   (ii) Spanning above 6 m: 21 days

In no circumstances shall forms be struck until the concrete reaches a strength of at least twice the stress to which concrete may be subjected at the time of removal of form work. All form works shall be removed without such shock or vibration as would damage the concrete. Form work for long span deep beams to be supported by MS props or Bhaluka Bamboo props as required based on the design for the formwork to take care the massive load of the green concrete.

**9.0 SYNTHETIC ENAMEL PAINT:**

Preparation of surface: The surfaces before painting shall be cleaned of all rust, scale, dirt and other foreign matter sticking to it with wire brushes, steel wool in case of steel surfaces and sand papering in case of wooden surfaces. Thereafter, one coat approved primer paint will be applied on the surface. Synthetic enamel paint (Superior quality as approved) shall be applied – two or more coats to give an even shade.

**10.0 FILLING EXCAVATED EARTH IN FOUNDATION TRENCHES AND PLINTH OR UNDER FLOORS:**

As soon as the work in foundation has been completed and measured, the sides of foundations shall be cleared of all debris, bricks bats, mortar dropping etc., and filled with earth in layers not exceeding 30cms, each layer shall be adequately watered, rammed and consolidated before the succeeding one is laid. Earth shall be rammed with iron rammers where feasible, and with the butt ends crowbars where rammer cannot be use.

The plinth shall be similarly filled with earth in layers not exceeding 30cms, adequately watered and consolidated by ramming with iron or wooden rammers. When filling reaches the finished level, the surface shall be flooded with water for at least 24 hours, allowed to dry and then rammed and consolidated, in order to avoid any settlement at a later stage.

Sand filling in plinth: Sand shall be clean and free from dust, organic and other foreign matter. Sand filling shall be done in a manner similar to earth filling in plinth. Concreting of floor shall not be started till the Engineer-in-charge has inspected and approved the filling.

**11.0 PLASTERING:**

11.1 **Preparation of surface:** All putlog holes in brick work and junction between concrete and brick work shall be properly filled in advance. Joints in brick work shall be raked about 10mm and concrete surface hacked to provide grip to the plaster. Projecting burrs of mortar formed due to gaps at joints in shuttering shall be removed. The surface shall be scrubbed clean with wire brush/coil brush to remove dirt, dust etc. and the surface thoroughly washed with clean water to remove efflorescence, grease and oil etc. and shall be kept wet for a minimum of six hours before application of plaster.

11.2 **Proportion:** The cement plaster shall be in specified proportion of cement and sand.

11.3 **Mixing:** The cement and sand should be thoroughly mixed in dry condition. After dry mixing the materials shall be wetted with just sufficient water to bring the mortar to proper consistency of thick paste. Mortar should be used immediately after mixing and arrangements shall be made so that not more than 30 minutes elapse between the cement first coming in contact with the moisture and laying. In all exterior plaster works waterproofing compound to be added to the mortar as per the specification of the manufacturer, if not indicated in the item rate quoted should be inclusive of the same.

11.4 **Placing:** Plaster shall be laid over the prepared surface in one coat to the specified thickness and rubbed with "PATAS" and trowel and shall be smooth, free from waviness and trowel marks.

11.5 **Sequence of operations:** For external plaster, the plastering operations shall be started from the top floor and carried downwards. For internal plaster, the plastering operations may be started wherever the building frame and cladding work are ready and the temporary supports of the ceiling resting on the wall or the floor have been removed.

11.6 **Curing:** Each coat shall be kept damp continuously till the next coat is applied or for a minimum period of 7 days. Moistening shall commence as soon as plaster is hardened sufficiently. Soaking of walls shall be avoided and only as much water as can be readily absorbed shall be used.

**12.0 ROAD WORKS:**

12.1 Levelling and dressing roadsides and verges including dressing the area and cutting earth upto 150mm depth and filling depression and breaking large earth lumps as directed.

12.2 Making 50 mm x 50 mm furrows, 25mm/ 50mm deep, 450 to the center line of the road and at one metre interval in the existing thin bituminous wearing coarse including sweeping and disposal of excavated material within 1000 metres lead. 25mm deep furrow cutting.

12.3 REPAIRING OF DAMAGED ROAD SURFACE BY 100 MM THICK WBM with 63mm to 45mm hand broken road metal, consolidated by road roller / manually to correct grade / course including excavation or raking out damaged portions as per direction (Ref. to MoRTH Spec.404) (Road roller supplied by Contractor).

12.4 Repairing extensively damaged surface with two layers of WATER BOUND MACADAM base course 75 mm thick (Wearing course) and Surfacing Course (sealing coat) with loose hand broken metal of size 63mm and graded down to 45mm rolled dry to proper compaction, grade and camber and wet rolling after placing bindage of loamy earth and finally sealing the compacted surface with a 25mm thick layer of sand shingles (Ref. to MoRTH Spec.404) and as directed as applied over new consolidated surface. (Road roller supplied by contractor).

12.5 Providing and laying Bituminous concrete using crushed stone aggregates of specified grading, premixed with bituminous binder and filler, transporting the hot mix to work site by tippers, laying with paver finisher equipped with electronic sensor to the required grade, level and alignment and rolling with 40/50 mm compacted thickness with bitumen of grade VG-30 @ 5.5% (percentage by weight of total mix) and lime filler @ 3% (percentage by weight of Aggregate) prepared in Batch Type Hot Mix Plant of 100120 TPH capacity.

12.6 Providing and applying primer coat with bitumen emulsion on prepared surface of granular Base including clearing of road surface and spraying primer at the rate of 0.60 kg/sqm using mechanical means including supply of bitumen emulsion by Contractor of approved quality.

12.7 Providing and applying tack coat with bitumen emulsion/bitumen using emulsion pressure distributor at the rate of 0.20 kg per sqm on the prepared bituminous/granular surface cleaned with mechanical broom including supply of bitumen emulsion/bitumen by Contractor of approved quality.

**13.0 TILE:**

Laying Vitrified tiles in different sizes (thickness to be specified by manufacturer), with water absorption less than 0.08 % and conforming to I.S. 15622, of approved make, in all colours & shade, in skirting, riser of steps, over 12 mm thick bed of cement mortar 1:3 (1cement: 3 coarse sand), including grouting the joint with white cement & matching pigments etc. complete. Size of Tile 600x600 mm

**14.0 WOODWORK:** Wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position: Kiln seasoned and chemically treated Hollock wood.

**15.0 WALL PAINTING:** Finishing walls with Acrylic Smooth exterior paint of required shade: New work (Two or more coat applied @ 1.67 ltr/10 sqm over and including base coat of water proofing cement paint applied @ 2.20 kg/10 sqm).

**16.0 TESTS FOR QUALITY CONTROL:**

The various tests shall be carried out by the contractor as and when instructed by the Engineer-in-charge and no separate payment shall be made unless otherwise specified in the schedule of rates. Following tests /test certificate to be produced by the contractor at his own cost as and when directed by the Engineer-in-charge.

(i) Water for construction and curing ('PH' value should not be less than 6.)
(ii) Cube test for RCC work.
(iii) Test for Strength of M.S. rod, Tor steel, structural steel should be produced.
(iv) Test for fine and coarse aggregate.
(v) Any other tests as per the direction of Engineer-in-charge.

**17.0 MEASUREMENT & PAYMENT:**

Payment for all works done shall be made on the basis of actual work done as per the schedule of rates. For all extra work done on the advice of the Company's Engineer and which is not included in the schedule of rates, deviation order for the same shall be made on the rates as decided by the Company's Engineer.

**18.0 SAFETY MEASURE:**

Safety measure as per OIL regulations shall be strictly adhered to by the Contractor. Safety belts and other measure taken by the Contractors shall be borne by the Contractor. If any loss or damage caused to life during the erection and execution, the contractor shall be fully responsible for the loss.

**19.0 RECORD KEEPING:**

19.1 A site order book will be maintained at site which will be in the custody of the Engineer-in-charge or his representative and all instructions given to the Contractor will be recorded in the site order book and the same has to be signed by the contractor to comply with the instruction given therein.

19.2 A register to be maintained at site which will be in the custody of the Engineer-in-charge or his representative to maintain the records of use of cement and the same has to be signed by the contractor

19.3 A separate register to be maintained at site by the contractor to record the works executed and remarks columns to be added in this to record the hindrance.

**20.0** In case of any ambiguity/conflict among various documents the decision of Engineer-in-charge will be final and binding.

**21.0 CONTRACTOR'S GODOWN:**

The contractor must make adequate arrangement as directed by the Engineer-in-Charge, for the storage in suitable godown of all perishable materials such as cement. On no account may cement be stacked on the ground either in or outside godown. The contractor shall also construct a temporary office at site, before start the execution of work at site, as directed by the Engineer- in charge.

**22.0 SPECIAL INSTRUCTION TO THE CONTRACTOR:**

22.1 Contractor must have mixture machine/transit mixer and vibrator for the RCC works. The Contractor shall use pump if needed for de-watering for excavation job for which no extra payment will be made.

22.2 Watch and ward, loss or damage to Company's property's theft and other incidental charges shall be Contractor's responsibility.

22.3 Efficient workmen to be engaged by the Contractor.

22.4 The Contractor's representative should report to Engineer-in charge on all working days at 7.30 AM for day to day instruction.

22.5 Materials if rejected should be removed from site within 48 (forty-eight) hours of rejection, failing which the company reserves the right to get the rejected materials removed at the risk and cost of the contractor.

22.6 The Company reserves the right to get the part or whole work completed through other agency at the risk and cost of the contractor if he fails to complete the work within the stipulated time without any valid reasons. The Company's decision shall be final and binding on the Contractor.

22.7 The Contractor shall obtain labour clearance within fourteen (14) days of signing the contract.

22.8 Water that may accumulate on the site during progress of the works or in trenches or at any excavated place of working site have to be evacuated from site by the contractor to entire the satisfaction of the Engineer-in-charge and at the Contractor's expense.

22.9 If needed water and electricity will have to be arranged by the Contractor at his own cost.

22.10 The Contractor and his workmen have to strictly observe the safety precautionary rules as per Mines Act. (Latest edition) while executing the work.

22.11 No road closure will be allowed during execution of work and necessary traffic signal/road boards to be displayed at proper place by the Contractor at his own cost. The Contractor shall be wholly responsible for any accident arising out of non-fulfilment of this condition.

22.12 The Contractor will be required to work expeditiously at the site.

22.13 Signatory of the contract agreement must attend at site of work at least once in a week along with the Engineer-in charge for necessary instruction/advice.

22.14 Hot and Cold permit, Gas leakage testing certificate issued by the Concerned Department to be submitted by the contractor to Engineer-in-charge.

22.15 Quantity of cement used will be calculated as per CPWD standard.

22.16 The contractor should submit the work program in form of a bar chart within 3 days of receipt of work order.

22.17 The security of materials issued to the contractor in connection with the work is the responsibility of the contractor, for which no extra payment will be made.

22.18 All materials supply by the contractor must be approved by Engineer in-charge and necessary test certificate from a competent authority for Steel, aggregates, sand, water, cube tests, or any other material as directed by the Engineer-In-charge to be used at the Foundation jobs will have to be produced by the Contractor.

22.19 Company's internal estimate is excluding of GST & PF component.

22.20 The contractor must complete the work in all respect within the work duration allotted to him as per work order. The duration of the work allotted to the contractor is inclusive of Sundays and Holidays. However, any delay in completion of the work due to reasons not attributable to the contractor will be considered based on hindrance register maintained during delay analysis of the work after its completion and the same will be considered during calculation of LD as per Contract.

**23.0 PLANTS AND EQUIPMENT TO BE PROVIDED BY THE CONTRACTOR:**

(i) Concrete Mixture Machine – 02 Nos.
(ii) Concrete Vibrator (Needle Type) - 02 Nos.
(iii) Dumper – 1 No.
(iv) Cube mould (150mm x 150mm x 150mm) – 3 Nos.
(v) Welding and cutting set - 1 No.

**24.0 GENERAL HEALTH, SAFETY & ENVIRONMENT (HSE) POINTS:**

24.1 The Contractor shall be solely responsible to comply all the statutory norms as applicable while executing the job. It will be solely the Contractor's responsibility to fulfill all the legal formalities with respect to the Health, Safety and Environmental aspects of the entire job (namely: the person employed by him, the equipment, the environment, etc.) under the jurisdiction of the district of that state where it is operating. Ensure that all sub-contractors hired by him comply with the same requirement as the Contractor himself and shall be liable for ensuring compliance of all HSE laws by the sub-contractors. It will be the responsibility of the Contractor/his Supervisor/representative to ensure strict adherence to all HSE measures and statutory Rules during operation in OIL's installations and safety of workers engaged by him. The crew members will not refuse to follow any instruction given by representative of OIL.

24.2 The Contractor shall ensure complete safety of the personnel and all the equipment engaged by him. They shall take full responsibility for their safety.

24.3 Contractor's arrangements for health and safety management shall be consistent with those for the company (OIL).

24.4 Contractor must, while at work, take reasonable care for the health and safety of people who are at the employee's place of work and who may be affected by the employee's act or omission at work. The contractor must cooperate with his/ her employee or other persons as far as is necessary to enable compliance with any requirement under the act or the regulations that is imposed in the interest of health, safety and welfare of the employee or any other person.

24.5 The Contractor may frame a mutually agreed bridging document if required between OIL & the Contractor for all issues not envisaged under the terms and conditions of the contract with the roles and responsibilities clearly defined.

24.6 The contractor has to keep a register of the persons employed by him/ her. The Contractor's supervisor shall take and maintain attendance of his/ her men every day for the work, punctually.

24.7 Every person deployed by the Contractor must use appropriate PPEs (Personal Protective Equipment) to be provided by the Contractor. The Contractor shall provide Personnel Protective Equipment as per the hazard identified and risk assessed for the job and conforming to statutory requirement. Safety appliances like protective footwear, Safety Helmet and Full Body harness, Fall Prevention Devises (FPD) shall conform to relevant IS codes. If the Contractor fails to provide the safety items as mentioned above to the working personnel, the Contractor may request to the Company (OIL) for providing the same. In case of exigency OIL will provide the safety items if available. However in turn, OIL will recover the actual cost of the items by deducting from Contractor's Bill. However, it will be the Contractor's sole responsibility to ensure that the persons engaged by him use the proper PPE while at work. Contractor employees should be encouraged for proper use and maintenance of PPE. In absence of appropriate PPEs, the representative of OIL has the right to stop the work which will be binding for the Contractor. Moreover, the accountability towards any delay in work/ penalty due non-adherence to PPE shall be binding to the Contractor.

24.8 All safety gears as per requirement of job are to be provided to the working personnel before commencement of the work.

24.9 Standard Operating Procedures (SOPs) related to scope of work shall be handed over to the representative of OIL by Contractor including an assessment of risk, wherever possible and safe methods to deal with it/ them. The SOP should clearly mention the risk arising to men, machineries & material from the operations to be done by the contractor and how it is to be managed. However; in case of any doubts, the Contractor shall reconfirm the same from the Engineer In Charge (OIL).

24.10 Contractor has to ensure that all work is carried out in accordance with the SOP and for the purpose he may deploy competent personnel for the purpose of carrying out the job in a safe manner. For the work which is not covered under SOP, the Contractor shall develop it and submit to the representatives of OIL.

24.11 In case of deviation of SOP or non-availability of SOP, Job Safety Analysis (JSA) shall be carried out before commencement of the work.

24.12 Necessary cold and hot work permits, wherever applicable, including excavation clearance and permission for working at height, Confined Space Entry are to be obtained by the competent person of the Contractor from Installation Manager before start of the job(s). Work Permit System should be inline as per guidelines issued by HSE Department.

24.13 If the Company (OIL) arranges any safety awareness program/ training for the working personnel at site (company employee, Contractor worker, etc.) the Contractor will not have any objection to any such training.

24.14 The Contractor or his representative shall arrange tool bod meetings and regular site safety meetings and maintain records.

24.15 Contractor should ensure that all his personnel deployed are of sound health and medically fit as per the requirement of the job. The Contractor shall not engage minor labor below eighteen (18) years of age under any circumstances.

24.16 OIL will communicate all information to the Contractor or his authorized representative only. Contractor shall submit details of authorized representative wherever applicable.

24.17 The Contractor shall have to report all incidents including near miss to the representative of OIL.

24.18 Any compensation arising out of the job carried out by the Contractor whether related to pollution, Safety or Health will be paid by the Contractor only.

24.19 Any compensation arising due to accident of the Contractor's personnel while carrying out the job, will be payable by the Contractor and their medical treatment/ facilities in case of accidents should be provided by the same contractor.

24.20 The Contractor should prevent frequent change of his deployed employees as far as practicable. However, of OIL's Engineer In Charge found any person not suitable for the job, the Contractor has to remove the person and replace a suitable person.

24.21 Necessary sign-board/ warning signals like "caution", "hot work in progress", "men at work", emergency telephone numbers etc. should be used wherever applicable. The said signals/ sign-boards shall have to be arranged by the contractor and shall be in line with the circular of signboards issued by HSE Department, Oil India Limited.

24.22 Barricading of area to be done with reflecting tapes as applicable during work.

24.23 The First-Aid box should be provided by the Contractor and the same has to be kept ready to use at the site.

24.24 Smoking is prohibited in all Company restricted areas except in authorized smoking areas/ shelters. Carrying of matches and lighters into the Hazardous Area is prohibited. Cellular phones shall not be used in operating areas/ hazardous areas unless they have been classified as "intrinsically safe" for use in that atmosphere. Consumption of alcohol and possession of non-prescribed drug in Company work site is strictly prohibited.

24.25 When there is a significant risk to health, environment or safety of a person or place arising because of a non-compliance of HSE Measures Company will have the right to direct the Contractor to cease work until the non-compliance is corrected.

24.26 In case Contractor is found non-compliant of HSE laws as required and all the above mentioned general HSE points, company will have the right for directing the Contractor to take action to comply with the requirements, and for further non-compliance, appropriate action will be initiated against the Contractor.

24.27 Any requirement arise by the Statutory Authorities during the period of contract shall be applicable and binding for the Contractor.

24.28 For any HSE matters not specified in the contract document, the contractor will abide the relevant and prevailing Acts/rules/regulations/pertaining to Health, Safety and Environment.

24.29 Considering the ongoing Covid-19 pandemic, those who are engaged in the above operations should be followed the Covid-19 Protocol as per the prevailing Government Guidelines.

**25.0 CONTRACTOR'S RISKS:**

All risks of loss of or damage to physical property and of physical injury and death to the personnel, which arise during the course of and in consequence of the performance of the contract, are the responsibility of the contractor.

**26.0 INDEMNITY AND INSURANCE:**

26.1 The contractor shall provide suitable insurance coverage from the date of issuance of work order to the end of defect liability period of the contract for the following events which are due to the contractor's risks, irrespective of whether such loss or damages are caused on account of negligence of the Contractor or their personnel.

a. Loss of or damage to the works plants and materials.
b. Loss of or damage to the equipment.
c. Loss of or damage of property (except the works, plant, materials & equipment) in connection with the contract.
d. Physical injury or death of all his manpower deployed by him.

26.2 In the event of any loss or damage, it shall be the responsibility of contractor to lodge the claim with insurer and Contractor shall put his best effort with the insurer for early settlement of the claim.

26.3 The policies and certificates for insurance shall be submitted by the contractor to the engineer in charge before the issuance of Work Order. In case, the Contractor fails to arrange the Insurance or arranges insufficient insurance, for the events, as mentioned above against any or all insurable risks, the Contractor shall be solely liable for loss or damage arising from such events or causes.

26.4 Contractor shall at his own expense arrange, secure, maintain and renew insurance for the events mentioned above throughout the contract period including the defect liability period.

26.5 **Indemnity Agreement:**
The contractor shall at all times indemnify and keep indemnified the Company and its personnel from and against all third party claims whatsoever, including but not limited to property loss and damage, personal accident, injury or death of or to property or person and any sub-contractor or agents of the contractor or Company.

**27.0 FOREST ROYALITY:**

27.1 As per Notification No. PEM 130/2021/40 dated 7th October, 2021 of Govt. of Assam, for Assam Minor Mineral Concession Rules, 2013, royalties and contribution towards "Minor Minerals", "District Mineral Foundation Trust Fund" (DMFT) and "Mines and Mineral Development, Restoration and Rehabilitation Fund" (MMDRRF) to be deposited as applicable directly through the website www.assamforestonline.in.

27.2 The rates of Royalties as per the "Third Schedule" of Notification No PEM 130/2021/40 dated 7th October, 2021.

| Sl. No. | Work | Appropriate amount of Royalty of Minor Mineral as percentage of Project Cost excluding taxes as GST, IT etc |
|---|---|---|
| I | RCC Building/RCC Work | 2.00 % |
| II | Assam Type Building (Single floor) | 1.00 % |
| III | Assam Type Building (Ground floor + 1 or more) | 2.00 % |
| IV | RCC Bridge Work | 2.00 % |
| V | DBM & BC Work | 2.00 % |
| VI | Road improvement / Re-construction Work | 3.00 % |
| VII | New Road Construction Work with Bituminous Work | 6.00 % |
| VIII | New Road Construction Work with ICBP | 3.00 % |
| IX | Earth Work/ Ordinary Clay | 9.00 % |
| X | Earth Work along with Geobag Protection Work | 3.50 % |
| XI | Earth Work along with Boulder Protection Work | 5.50 % |
| XII | River Protection Work with Boulder | 4.00 % |
| XIII | River Protection Work with Geobag | 1.50 % |
| XIV | River Protection Work with Boulder and Geobag | 2.00 % |
| XV | Head work/Brick work of lrrigation projects | 4.00 % |
| XVI | Pradhan Mantri Awas Yojana (PMAY) | 1.00 % |

27.3 As per Notification No. PEM 130/2021/55 Dated 16th December, 2021 in addition to the royalties, a sum of 10% of the royalty as per the 3rd schedule must be deposited in each of the District Mineral Foundation Trust (DMFT) and Mines and Mineral Development Restoration and Rehabilitation Fund (MMDRRF).

27.4 The Contractor will be liable to ensure to have registered in the portal www.assamforestonline.in and to submit self-attested copy of the corresponding of Forest Royalty, DMFT & MMDRRF against the project. Contractor will be responsible for procurement of material in its own registration and to issue its own e-challan as applicable.

27.5 OIL will reimburse the amount at actuals against submission of self-attested copy of e challan/receipt/certificates generated from the portal along with running bills.

27.6 However, OIL will release the final bill only after ensuring that all relevant certificates issued by concerned authority against payment of Forest Royalty, DMFT & MMDRRF are submitted by the contractor to CIVIL-HOD for the job executed.

**28.0** The contractor shall deposit the PAN and GST registration number (if applicable, as per Statutory GST Regulations) as and when required by the Company. If the above are not available with the contractor, the contractor must apply for the same after signing of the Contract and submit the same within 45 days of signing the contract (or as and when advised by the Company, after 45 days of signing the contract). Moreover, the statutory guidelines of Goods and Service Tax (GST) shall be adhered to by the contractor.

**29.0** A Hindrance Register shall be maintained in the enclosed Format to record all hindrances encountered during execution of works against the contract. The items of work affected due to any hindrance shall be clearly recorded in the Hindrance Register and the Engineer-in-charge of the Company as well as the site representative of the Contractor will sign on the register against the recorded hindrance. In case of encountering multiple hindrances simultaneously over a period of time affecting the same item or different items, the net period of hindrance will be worked out considering the overlapping period.

**30.0** Company reserves the right to initiate actions against the bidder / contractor during processing of tender and / or during continuation of the contract as per OIL's Banning Policy available at OIL's website.

**31.0** Defect liability period shall be **6 months** beyond the date of completion of works as certified by Engineer-In-Charge. During defect liability period, all corrective works shall be carried out entirely at Contractor's own expenses. If such corrective works are not carried out within a reasonable time, the Company, at its discretion, may have such remedial works carried out by other agencies and charge the cost thereof to the Contractor. This amount shall be deducted from contractor's bill/ Retention money/ Performance security.

**32.0** **PBG/Security Deposit Clause:** The Contractor has furnished to Company the performance security in the form of _____ of Rs. _____ **(Not to be filled up by the bidder while submitting the offer. This is to be filled up by OIL at the time of award of the contract to the successful bidder)** (being 2.5% of the contract value) with validity upto _____. The Performance Security shall be payable to Company as compensation for any loss resulting from Contractor's failure to fulfil their obligations under the Contract. If in case the original Contract is required to be amended thereby increasing the Contract cost or the contractual period or both, the Contractor must deposit the requisite additional amount of Performance Security and / or extend the validity of the Performance security accordingly. Security deposit will be released to the Contractor after successful completion of defect liability period as defined in the Contract subject to receipt of advice for release of the same from the User Department.

# WORKS CONTRACT

## SCHEDULE OF COMPANY'S PLANTS, MATERIALS AND EQUIPMENT

A. SCHEDULE OF MATERIALS AVAILABLE AT THE COMPANY'S STORES/STOCK PILES for permanent incorporation in works and

B. SCHEDULE OF COMPANY'S PLANTS AND EQUIPMENT for use in the execution of work.

1) **MATERIALS:** All construction materials to be supplied by the contractor except cement. The cement will be issued to the contractor from Duliajan material Godown free of cost as per CPWD specification.

2) **PLANTS AND EQUIPMENT:** Nil (All plants and equipment required for execution of the job to be arranged by the Contractor for which no extra payment will be given).

**NOTE:**

(i) The Contractor is to arrange transport of the above materials to site of work and for safety thereof for which no extra payment will be made.

(ii) If any Plants and equipment issued to Contractor must be under proper watch so that no part is pilfered. These must be handled only by Company's operators. Contractor shall be responsible for any loss or damage to these plants and equipment while these are under his/their custody.

(iii) Materials issued to Contractor must be under proper watch & ward so that no part is pilfered. If any pilferation takes place the matter will be referred to appropriate Govt. authorities for legal action as well as realization of the materials issued. Cement issued to contactor is meant specially for company work relating to the contact.

(iv) All other materials issued to the Contractor by the Company if subsequently found to be in excess of the actual requirement, will have to be returned by the Contractor within two weeks of completion of the work failing which the cost of all such materials will be recovered from the Contactor at double the value of materials without any reference to him from any bill/ amount due to the contractor.

(v) Empty Cement bags must be returned to company's godown after completion of the work failing which a sum of Rs 8 /- per bag (Rupees Eight only) will be recovered from the Contractor's bill.

(vi) Watch & Ward of Company's material to be arranged by the contractor at his own cost & risk.

(vii) Company’s Materials will be issued by Company as per maximum theoretical consumption against the specific item.

(viii) Any excess quantity of Company's material issued to the contractor more than theoretical consumption for the interest of the job will be deducted from contactor's bill at double the cost of latest market rate.

(ix) Surplus quantity of Company's material must be returned by the contractor to the Company's stockpile at his own cost.

(x) If the materials listed above are not available suitable substitute may be provided by the Company and Contractor shall incorporate it.

**To,**
**CGM-CONTRACTS (HOD)**
**OIL INDIA LIMITED**
**DULIAJAN-786602**

**SUB: SAFETY MEASURES**

**DESCRIPTION OF WORK/SERVICE**: Construction of boundary wall, approach road and operator room cum IM room by earth filling the low laying area for placement of In-house Gas compressor inside Dikom GCS.

Sir,

We hereby confirm that we have fully understood the safety measures to be adopted during execution of the above contract and that the same have been explained to us by the concerned authorities. We also give the following assurances.

a) Only experienced and competent persons shall be engaged by us for carrying out work under the said contract.

b) The names of the authorized persons who would be supervising the jobs on day to day basis from our end are the following:

i) _____
ii) _____
iii) _____

The above personnel are fully familiar with the nature of jobs assigned and safety precautions required.

c) Due notice would be given for any change of personnel under item (b) above.

d) We hereby accept the responsibility for the safety of all the personnel engaged by us and for the safety of the Company's personnel and property involved during the course of our working under this contract. We would ensure that all the provisions under the Oil Mines Regulations, 2017 and other safety rules related to execution of our work would be strictly followed by our personnel. Any violation pointed out by the Company's Engineers would be rectified forthwith or the work suspended till such time the rectification is completed by us and all expenditure towards this would be on our account.

e) We confirm that all persons engaged by us would be provided with the necessary Safety Gears at our cost.

f) All losses caused due to inadequate safety measures or lack of supervision on our part would be fully compensated by us and the Company will not be responsible for any lapses on our part in this regard.

g) We shall abide by the HSE (Health Safety & Environment) points mentioned in SCC.

(Seal) Yours Faithfully

Date_____ M/s_____
CONTRACTOR

## INTEGRITY PACT

Between
**Oil India Limited (OIL)** hereinafter referred to as "The Principal"
And
(Name of the bidder).....hereinafter referred to as "The Bidder"

**Preamble:**

The Principal intends to award, under laid down organizational procedures, contract/s for **"Construction of boundary wall, approach road and operator room cum IM room by earth filling the low laying area for placement of In-house Gas compressor inside Dikom GCS."** The Principal values full compliance with all relevant laws and regulations, and the principles of economic use of resources, and of fairness and transparency in its relations with its Bidder/s.

In order to achieve these goals, the Principal cooperates with the renowned international Non-Governmental Organization "Transparency International" (TI). Following TI's national and international experience, the Principal will appoint an external independent Monitor who will monitor the tender process for compliance with the principles mentioned above.

### Section 1 - Commitments of the Principal

(1) The Principal commits itself to take all measures necessary to prevent Corruption and to observe the following principles:-

I. No employee of the Principal, personally or through family members, will in connection with the tender for, or during execution of a contract, demand, take a promise for or accept, for him/herself or third person, any material or immaterial benefit which he/she is not legally entitled to.

II. The Principal will, during the tender process treat all Bidders with equity and reason. The Principal will in particular, before and during the tender process, provide to all Bidders the same information and will not provide to any Bidder confidential/additional information through which the Bidder could obtain an advantage in relation to the tender process.

III. The Principal will exclude from the process all known prejudiced persons.

(2) If the Principal obtains information on the conduct of any of its employees which is a criminal offence under the relevant Anti-Corruption Laws of India, or if there be a substantive suspicion in this regard, the Principal will inform the Chief Vigilance Officers and in addition can initiate disciplinary actions.

### Section 2 - Commitments of the Bidder

(1) The Bidder commits itself to take all measures necessary to prevent corruption. During his participation in the tender process, the Bidder commits himself to observe the following principles:

I. The Bidder will not, directly or through any other person or firm, offer, promise or give to any of the Principal's employees involved in the tender process or the execution of the contract or to any third person any material or immaterial benefit which he/she is not legally entitled to, in order to obtain in exchange any advantage of any kind whatsoever during the tender process or during subsequent contract execution, if awarded.

II. The Bidder will not enter with other Bidders into any undisclosed agreement or understanding, whether formal or informal. This applies in particular to prices, specifications, certifications, Subsidiary contracts, submission or non-submission of bids or any other actions to restrict competitiveness or to introduce cartelization in the bidding process.

III. The Bidder(s) will not commit any offence under the relevant Anticorruption Laws of India, further, the Bidder(s) will not use improperly, for purposes of competition or personal gain, or pass on to others, any information or document provided by the Principal as part of the business relationship, regarding plans, technical proposals and business details, including information contained or transmitted electronically.

IV. The Bidder will, when presenting his bid, disclose any and all payments he has made, is committed to or intends to make to agents, brokers or any other intermediaries in connection with the award of the contract.

V. Bidders to disclose any transgressions with any other public/government organization that may impinge on the anti-corruption principle. The date of such transgression, for the purpose of disclosure by the bidders in this regard, would be the date on which cognizance of the said transgression was taken by the competent authority. The period for which such transgressions (s) is/are to be reported by the bidders shall be the last **three years** to be reckoned from date of bid submission. The transgression (s), for which cognizance was taken even before the said period of three years, but are pending conclusion, shall also be reported by the bidders.

VI. The Bidder(s) of foreign origin shall disclose the name and address of the Agents/ representatives in India, if any. Similarly, the Bidder(s) of Indian Nationality shall furnish the name and address of the foreign principals, if any. Further, all the payments made to the Indian agent/ representative have to be in India Rupees only.

VII. Bidders not to pass any information provided by Principal as part of business relationship to others and not to commit any offence under PC/ IPC Act;

(2) The Bidder will not instigate third persons to commit offences outlined above or be an accessory to such offences.

(3) The Bidder signing Integrity Pact shall not approach the Courts while representing the matters to IEMs and he/she will await their decision in the matter.

## Section 3 - Disqualification from tender process and exclusion from future Contracts

If the Bidder, before contract award has committed a transgression through a violation of Section 2 or in any other form such as to put his reliability or risibility as Bidder into question, the Principal is entitled to disqualify the Bidder from the tender process, for such reason.

1. If the Bidder has committed a transgression through a violation of Section 2 such as to put his reliability or credibility into question, the Principal is entitled also to exclude the Bidder from future contract award processes. The imposition and duration of the exclusion will be determined by the severity of the transgression. The severity will be determined by the circumstances of the case, in particular the number of transgressions, the position of the transgressions within the company hierarchy of the Bidder and the amount of the damage. The exclusion will be imposed for a minimum of 6 months and maximum of 2 years.

2. The Bidder accepts and undertakes to respect and uphold the Principal's Absolute right to resort to and impose such exclusion and further accepts and undertakes not to challenge or question such exclusion on any ground, including the lack of any hearing before the decision to resort to such exclusion is taken. This undertaking is given freely and after obtaining independent legal advice.

3. If the Bidder can prove that he has restored/recouped the Damage caused by him and has installed a suitable corruption prevention system, the Principal may revoke the exclusion prematurely.

4. A transgression is considered to have occurred if in light of available evidence, no reasonable doubt is possible.

5. Integrity Pact, in respect of a particular contract, shall be operative from the date Integrity Pact is signed by both the parties or as mentioned in Section 9 - Pact Duration whichever is later. Any violation of the same would entail disqualification of the bidders and exclusion from future business dealings.

## Section 4 - Compensation for Damages

1. If the Principal has disqualified the Bidder from the tender process prior to the award according to Section 3, the Principal is entitled to demand and recover from the Bidder liquidated damages equivalent to Earnest Money Deposit / Bid Security.

2. If bidder agrees and undertakes to pay the said amounts without protest or demur subject only to condition that if the Bidder can prove and establish that the exclusion of the Bidder from the tender process has caused no damage or less damage than the amount or the liquidated damages, the Bidder shall compensate the Principal only to the extent of the damage in the amount proved.

## Section 5 - Previous transgression

1. The Bidder declares that no previous transgression occurred in the last 3 years with any other company in any country conforming to the TI approach or with any other Public Sector Enterprise in India that could justify his exclusion from the tender process.

2. If the Bidder makes incorrect statement on this subject, he can be disqualified from the tender process for such reason.

## Section 6 - Equal treatment of all Bidders/Contractor/Subcontractors

1. The Principal will enter into Pacts on identical terms with all bidders.

2. The Bidder undertake(s) to procure from all subcontractors a commitment in conformity with this Integrity Pact. The Bidder shall be responsible for any violation(s) of the provisions laid down in this agreement/Pact by any of its sub-contractors/sub-vendors.

3. The Principal will disqualify from the tender process all bidders who do not sign this Pact or violate its provisions.

## Section 7 - Criminal charges against violating Bidders/Contractors/Subcontractors

If the Principal obtains knowledge of conduct of a Bidder, Contractor or Subcontractor, or of an employee or a representative or an associate of a Bidder, Contractor or Subcontractor, which constitutes corruption, or if the Principal has substantive suspicion in this regard, the Principal will inform the Vigilance Office.

## Section 8 - External Independent Monitor/Monitors

1. The Principal appoints competent and credible Independent External Monitor (IEM) for this Pact.

2. The Monitor is not subject to instructions by the representatives of the parties and performs his functions neutrally and independently. He reports to the Chairperson of the Board of the Principal.

3. The Bidder accepts that the Monitor has the right to access without restriction to all Project documentation of the Principal including that provided by the Bidder. The Bidder will also grant the Monitor, upon his request and demonstration of a valid interest, unrestricted and unconditional access to his project documentation. The same is applicable to Subcontractors. The Monitor is under

contractual obligation to treat the information and documents of the Bidder/Contractor/Subcontractor with confidentiality.

4. The Principal will provide to the Monitor sufficient information about all meetings among the parties related to the Project provided such meetings could have an impact on the contractual relations between the Principal and the Bidder. The parties offer the Monitor the option to participate in such meetings.

5. As soon as the Monitor notices, or believes to notice, a violation of this agreement, he will so inform the Management of the Principal and request the Management to discontinue or heal the violation, or to take other relevant action. The monitor can in this regard submit non-binding recommendations. Beyond this, the Monitor has no right to demand from the parties that they act in a specific manner, refrain from action or tolerate action. However, the Independent External Monitor shall give an opportunity to the bidder to present its case before making its recommendations to the Principal.

6. The Monitor will submit a written report to the Chairperson of the Board of the Principal within 8 to 10 weeks from the date of reference or intimation to him by the 'Principal' and, should the occasion arise, submit proposals for correcting problematic situations.

7. If the Monitor has reported to the Chairperson of the Board a Substantiated suspicion of an offence under relevant Anti-Corruption Laws of India, and the Chairperson has not, within reasonable time, taken visible action to proceed against such offence or reported it to the Vigilance Office, the Monitor may also transmit this information directly to the Central Vigilance Commissioner, Government of India.

8. The word 'Monitor' would include both singular and plural.

9. In case of any complaints referred under IP Program, the role of IEMs is advisory and the advice of IEM is non-binding on the Organization. However, as IEMs are invariably persons with rich experience who have retired as senior functionaries of the government, their advice would help in proper implementation of the IP.

## Section 9 - Pact Duration

This Pact begins when both parties have legally signed it. It expires for the Contractor 12 months after the last payment under the respective contract, and for all other Bidders 6 months after the contract has been awarded.

If any claim is made/ lodged during this time, the same shall be binding and continue to be valid despite the lapse of this pact as specified above, unless it is discharged/determined by Chairperson of the Principal.

## Section 10 - Other provisions

1. This agreement is subject to Indian Law. Place of performance and jurisdiction is the Registered Office of the Principal. The Arbitration clause provided in the main tender document / contract shall not be applicable for any issue / dispute arising under Integrity Pact.

2. Changes and supplements as well as termination notices need to be made in writing. Side agreements have not been made.

3. If case of a joint venture, all the partners of the joint venture should sign the Integrity Pact. In case of sub-contracting, the principal contractor shall take the responsibility of the adoption of IP by the sub-contractor. It is to be ensured that all sub-contractors also sign the IP. In case of sub-contractors, the IP will be a tri-partite arrangement to be signed by the Organization, the contractor, and the sub-contractor.

4. Should one or several provisions of this agreement turn out to be invalid, the remainder of this agreement remains valid. In this case, the parties will strive to come to an agreement to their original intensions.

| | |
|---|---|
| ---------- | ---------- |
| **For the Principal** | **For the Bidder/Contractor** |
| Place: Duliajan. | Witness 1: ..... |
| Date: | Witness 2: ..... |

**Annexure-I**

**(To be typed on the letter head of the bidder)**

**To**
**CGM-CONTRACTS (HOD)**
**OIL INDIA LIMITED**
**DULIAJAN**

Dear Sirs,

**Sub: UNDERTAKING/DECLARATION BY THE BIDDER (S) IN RESPECT OF TENDER NO. CDC7030L25**

(To be submitted by the Bidders who are not covered under EPF&MP Act, 1952)

This is in connection with the Bid submitted by .....(Name of the Bidder) against Tender .....for .....(subject of the Tender). As per the conditions stipulated in Clause no.....(Name of the Provision/Covering Letter etc.), we/I ,being authorized on behalf of .....(Name of the Contractor) hereby confirm and undertake as follows;

- That our Firm/Company shall be responsible to comply with all the applicable labour laws in respect of the present Contract.

- That we are fully conversant with the applicable laws and confirm that our Firm/Company is not covered under the Employees Provident Funds and Misc. Provisions Act, 1952 and applicable Rules there under, and therefore I we have not obtained any registration or Provident Fund Code under the Act.

- That if, during the period of the present Contract, we/our Firm /Company comes within the coverage of the aforesaid Acts or any other statutes; we shall comply with the same and submit the necessary documents to OIL. We further confirm that we will indemnify OIL towards any future statutory compliances/claims raised from any corner including statutory authorities against the Labour engaged by our Firm/Company in the Contract.

- That in the event of any contravention towards the applicable laws found on our part in respect of the present Contract, we undertake to indemnify OIL and deposit the claims, if any.

- That we shall fulfill all the obligations arising from under the labour laws in force from time to time and keep OIL indemnified against any loss/liability arising out of failure of our avoiding the laws.

We, further agree and undertake that in case of any violation of the above undertaking, OIL shall be at liberty to take appropriate action against us in terms of the Tender including but not limited to termination of contract and debarment from future business with OIL.

I/We declare that the information given above is true and any misstatement or misrepresentation or suppression of facts in connection with the above undertaking may entail rejection of the bid and cancellation of contract, if awarded.

Yours faithfully,

**1. Authorized Signatory** _____
**(BIDDER)**

**Place:-**
**Date:-**

**********

# ANNEXURE II - FORMAT FOR HINDRANCE REGISTER

Description of Project : …….. Contract No. & Date : ……..

Contractor's Name : …….. Scheduled Completion Date : ……..

| Sl. No. | Nature of Hindrance | Items of work that could not be executed because of this hindrance | Date of start of hindrance | Date of Removal of hindrance | Period of hindrance | Overlapping Period, if any | Net hindrance days | Remarks |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | |
| **Signature of Contractor's Representative** | | | **Signature of Engineer-in-charge** | | | **Signature of HoD** | | |

**Annexure- III**

**Format of undertaking by Bidders towards submission of authentic information/documents**
**(To be typed on the letter head of the bidder)**

Ref. No_____ Date _____

**Sub: Undertaking of authenticity of information/documents submitted**

**Ref: Your tender No. CDC7030L25**

To,
CGM-CONTRACTS (HOD)
Contracts Dept.
OIL, Duliajan

**Sir,**

With reference to our quotation against your above-referred tender, we hereby undertake that no fraudulent information/documents have been submitted by us.

We take full responsibility for the submission of authentic information/documents against the above cited bid.

We also agree that, during any stage of the tender/contract agreement, in case any of the information/documents submitted by us are found to be false/forged/fraudulent, OIL has right to reject our bid at any stage including forfeiture of our EMD and/or PBG and/or cancel the award of contract and/or carry out any other penal action on us, as deemed fit.

Yours faithfully,

For (Name of the firm _____)

Signature of Authorised Signatory

Name :

Designation :

Phone No.

Place :

Date :

(Affix Seal of the Organization here, if applicable)

**Annexure-IV**

**FORMAT OF PERFORMANCE BANK GUARANTEE**

**(TO BE FURNISHED BY THE CONTRACTOR IN CASE OF SUBMITTING PERFORMANCE SECURITY IN THE FORM OF BANK GUARANTEE AFTER ISSUE OF LOI)**

**To**
**M/s OIL INDIA LIMITED,**
**CONTRACTS DEPARTMENT,**
**DULIAJAN, ASSAM, INDIA, PIN-786602**

WHEREAS _____ (Name and address of the Contractor) (hereinafter called "Contractor") had undertaken, in pursuance of Contract No. _____ to execute (Name of Contract and Brief Description of the Work) _____ (hereinafter called "the Contract").

AND WHEREAS is has been stipulated by you in the said Contract that the Contractor shall furnish you with a Bank Guarantee as security for compliance with Contractor's obligations in accordance with the Contract.

AND WHEREAS we have agreed to give the Contractor such a Bank Guarantee; Now THEREFORE we hereby affirm that we are Guarantors on behalf of the Contractor, up to a total of (Amount of Guarantee in figures) _____ )in words _____), such amount being payable in the types and proportions of currencies in which the Contract price is payable, and we undertake to pay you, upon your first written demand and without cavil or argument, any sum or sums within the limits of guarantee sum as aforesaid without your needing to prove or to show grounds or reasons for your demand for the sum specified therein. We hereby waive the necessity of your demanding the said debt from the Contractor before presenting us with the demand.

We further agree that no change or addition to or other modification of the terms of the Contract or the work to be performed there under or of any of the Contract documents which may be made between you and the Contractor shall in any way cease us from any liability under this guarantee, and we hereby waive notice of such change, addition or modification.

This guarantee is valid until the _____day of _____

The details of the Issuing Bank and Controlling Bank are as under:

A. Issuing Bank:

BANK FAX NO:

BANK EMAIL ID:

BANK TELEPHONE NO.:

IFSC CODE OF THE BANK:

B. Controlling Office:

Address of the Controlling Office of the BG issuing Bank:

Name of the Contact Person at the Controlling Office with Mobile No. and e-mail address:

Contd.... P/2

Notwithstanding anything contained herein:

a) Our liability under this Bank Guarantee shall is restricted up to Rs.....

b) This guarantee shall be valid till .....

c) We are liable to pay the guaranteed amount or any part thereof under this Bank Guarantee only and only if you serve upon us a written claim or demand on or before ..... (Date of Expiry of BG PLUS one year claim period).

d) At the end of the claim period that is on or after ..... (Date of expiry of the Bank Guarantee Plus Minimum of 1 year claim period shall be stipulated) all your rights under this Guarantee shall stand extinguished and we shall be discharged from all our liabilities under this Guarantee irrespective of receipt of original Bank Guarantee duly discharged, by Bank.

Name of the Contact Person at the Controlling Office with Mobile No. and e-mail address:

a) SIGNATURE AND SEAL OF THE GUARANTORS _____
b) Designation _____
c) Name of the Bank_____
d) Addres_____

Note:

***** The Bidder should insert the amount of the guarantee in words and figures.

****** Date of expiry of Bank Guarantee should be minimum 30 days after the end of the validity period of the Bid/as specified in the Tender.

******* The Bank Guarantee issuing bank branch shall ensure the following:

a. The Bank Guarantee issued by the Bank must be routed through SFMS platform as per following details:

(i) MT 760/ MT 760 COV for issuance of Bank Guarantee
(ii) MT 760/ MT 767 COV for amendment of Bank Guarantee

The above message / intimation shall be sent through SFMS (indicating the Contract Number) by the BG issuing bank branch to ICICI BANK, Duliajan Branch; IFSC Code – ICIC0000213; SWIFT Code – ICICINBBXXX; Branch Address: ICICI Bank Ltd., Kunja Bhavan, Daily Bazaar, Duliajan, Dibrugarh, Assam -786602.

b. Bank Guarantee issued by a Scheduled Bank in India at the request of some other Non-Scheduled Bank of India shall not be acceptable.

c. Further correspondence against BG towards Performance Security must contain the Contract Number.

**Annexure-V**

## UNDERTAKING BY VENDOR ON SUBMISSION OF BANK GUARANTEE

**To,**

**The Oil India Limited**
**Contracts Department**
**Duliajan – 786602**
**Assam**

We M/s ..... are submitting the Bid Security/ Performance Security (strike out whichever not applicable) in favour of Oil India Limited, Duliajan in the form of bank guarantee bearing Reference No. ..... for an amount of INR ..... valid up to ..... as per terms and conditions of the Tender/Contract No. .....

**BG issuing bank details:**

| | |
|---|---|
| Bank:<br>Branch:<br>IFS Code: | |
| **Contact Details**<br>E-mail Addresses: | Mobile No.:<br>Telephone No.:<br>Fax No.: |
| **Correspondence Address**<br>H No/Street/City: | State:<br>Country:<br>Pin Code: |

Declaration:

We have arranged to send the confirmation of issuance of the bank guarantee via SFMS portal through our bank using the details mentioned in the tender/contract and hereby confirming the correctness of the details mentioned.

Authorized Signature: _____

Name: _____

Vendor Code: _____

Email ID: _____

Mobile No.: _____

Enclosure: Original bank guarantee

**Annexure-VI**

## DECLARATION ABOUT BIDDER'S FINANCIAL STANDING

**To,**
**CGM-CONTRACTS**
**OIL INDIA LIMITED**
**DULIAJAN - 786602**

**Sub**: Undertaking/Declaration regarding financial standing

**Ref**: Tender No. **CDC7030L25**

We, _____ (name of bidder), hereby confirm that:

(1) We are neither bankrupt nor undergoing any insolvency resolution process or liquidation or bankruptcy proceeding under any law.

**(OR)**

(2) No insolvency resolution process or liquidation or bankruptcy proceeding is initiated under any law against us.

Place: _____

Date: _____

_____
(Name & Signature of the authorised signatory of the bidder)

**Annexure-VII**

## DECLARATION THAT BIDDER IS NOT UNDER HOLIDAY LIST/DELISTED/BLACKLISTED/DEBARRED IN OIL

**To,**
**CGM-CONTRACTS**
**OIL INDIA LIMITED**
**DULIAJAN - 786602**

**Sub**: Undertaking/Declaration regarding Holiday List, debarment etc.

**Ref**: Tender No. **CDC7030L25**

We, _____ (Name of the bidder) hereby declare that neither our company nor any of its allied concerns, partners or associates or directors or proprietors involved in any capacity, are currently put on holiday list/banning list by OIL debarring us/them from carrying on business dealings with OIL.

Place: _____

Date: _____

_____
(Name & Signature of the authorised signatory of the bidder)

**Annexure-VIII**

**Declaration by the vendor/party for confirmation of Term deposit/Fixed Deposit from the issuing bank**

To,
M/s Oil India Limited,
P.O. Duliajan, Assam, India

Sub: **Contract No. .....**

| | | |
|---|---|---|
| Full address of the issuing bank | : | |
| Branch Code | : | |
| Authorised signatory with full name and designation | : | |
| Phone (Mobile) Numbers of the branch | : | |
| Email address of the branch | : | |
| Such fixed/term deposit must be pledged in favour of OIL and it must in the printed form on the physical original FDR in words "Pledged in favour of Oil India Limited" | : | |

**Authorised Person's Signature:** _____

**Name:** _____

**Designation:** _____

**Seal of the Bank:**

**Tender No. CDC7030L25** **Proforma**

---

**UNDERTAKING BY BIDDER IN RESPECT OF QUOTED PRICE AGAINST TENDER NO. CDC7030L25**

I/We do hereby solemnly affirm and declare as under:

a) That I/we have gone through all the tender documents (i) Covering Letter (ii) BEC/BRC (iii) GCC (iv) SOQ (v) SCC (vi) SCPME (vii) SM (viii) IP and agree with all the terms and conditions provided there in.

b) That I/we hereby offer to execute the work described above at the price quoted in the "Total Bid Value" (under RFx Information > Basic Data > Total Bid Value) inclusive of all liabilities including statutory liabilities except PF & GST in accordance with the Contract Terms & Conditions, which I/ we have fully understood.

---

(Note: Uploading in the OIL's e-portal with digital signature will be construed that the same has been signed by the bidder's authorized signatory who has signed the bid).